



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Static Shielding Bag 1300 Series

This transparent metal-in static shielding bag is designed to provide a static safe environment for ESD sensitive electronic devices. A stronger polyester layer helps prevent punctures. Bags are printed with an ESD protective symbol and a lot code for traceability. The bags are heat sealable. ZipTop and other custom features are available.

SCS Static Shielding Bags 1300 are manufactured from a polyester, metal, polyethylene laminate. The polyester dielectric in concert with the metal layer provides shielding of Electrostatic Discharge (ESD) and minimizes the penetration of electrostatic and electric fields.

Meets ANSI/ESD S20.20 Packaging Standard, ANSI/ESD S541, and Static Control Bag ANSI/ESD S11.4 Level 3





Physical	Typical Value	Testing Method
Tensile Strength	8100 PSI, 55 MPa	ASTM D882
Puncture Resistance	22 lbs, 98 N	MIL-STD-3010C Method 2065
Seal Strength	15 lbs, 66 N	ASTM D882
Thickness	3.2 mils, 0.0813 mm +/-10%	MIL-STD-3010C Method 1003
Marking Adhesion	Pass	IPC-TM-650 2.4.1
Transparency	40%	Tobias

Electrical	Typical Value	Testing Method
Discharge Shielding	<20 nJ	ANSI/ESD STM11.31
Surface Resistance - Interior	1×10^4 to $< 1 \times 10^{11}$ ohms	ANSI/ESD STM11.11
Surface Resistance - Exterior	1×10^4 to $< 1 \times 10^{11}$ ohms	ANSI/ESD STM11.11

Cleanliness	Typical Value	Testing Method
Silicone	Not Detected	FTIR

Heat Sealing Conditions	Typical Value
Temperature	375°F, 190°C
Time	0.5 – 3.5 seconds
Pressure	30 – 70 PSI, 206 - 482 KPa

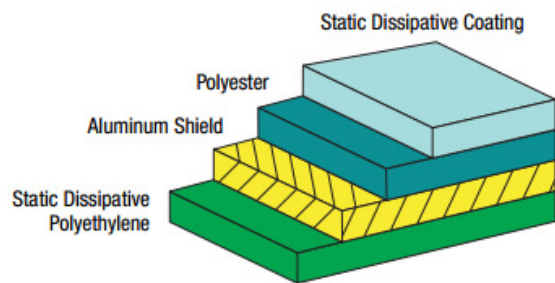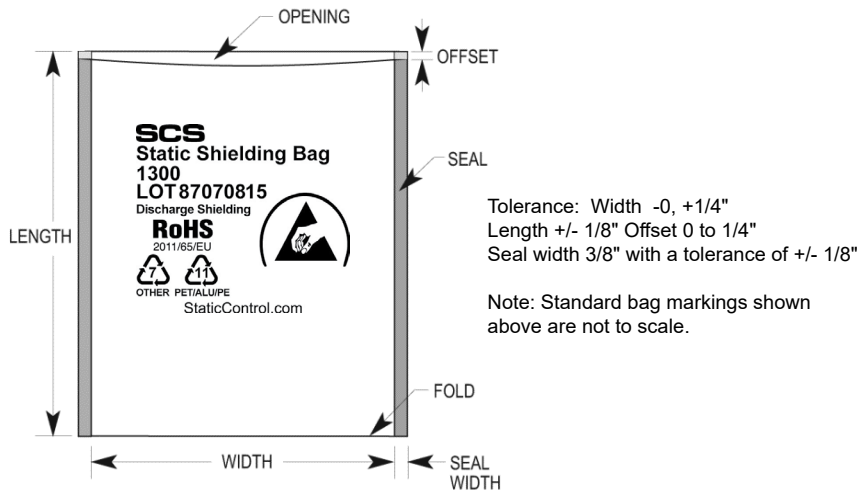

RoHS 2, REACH, and Conflict Minerals Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2015/12/17, or Conflict Minerals are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE. See [SCS Warranty, Limitation of Liability and Remedies](#)

Bag is free of amines, silicones and heavy metals.

This product is intended for commercial use only. This product is not on the Qualified Product Listing under the Defense Standardization Program.

Made in the United States of America with Globally Sourced Materials.

Specifications and procedures subject to change without notice.

1300 SERIES STATIC SHIELDING BAG

926 JR Industrial Drive, Sanford, NC 27332
 WEB SITE: StaticControl.com
 PHONE (919) 718-0000

DRAWING NUMBER
 1300 Series

DATE
 July
 2016

