



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### Intellimod™ Module Single Phase IGBT Inverter Output 600 Amperes/600 Volts

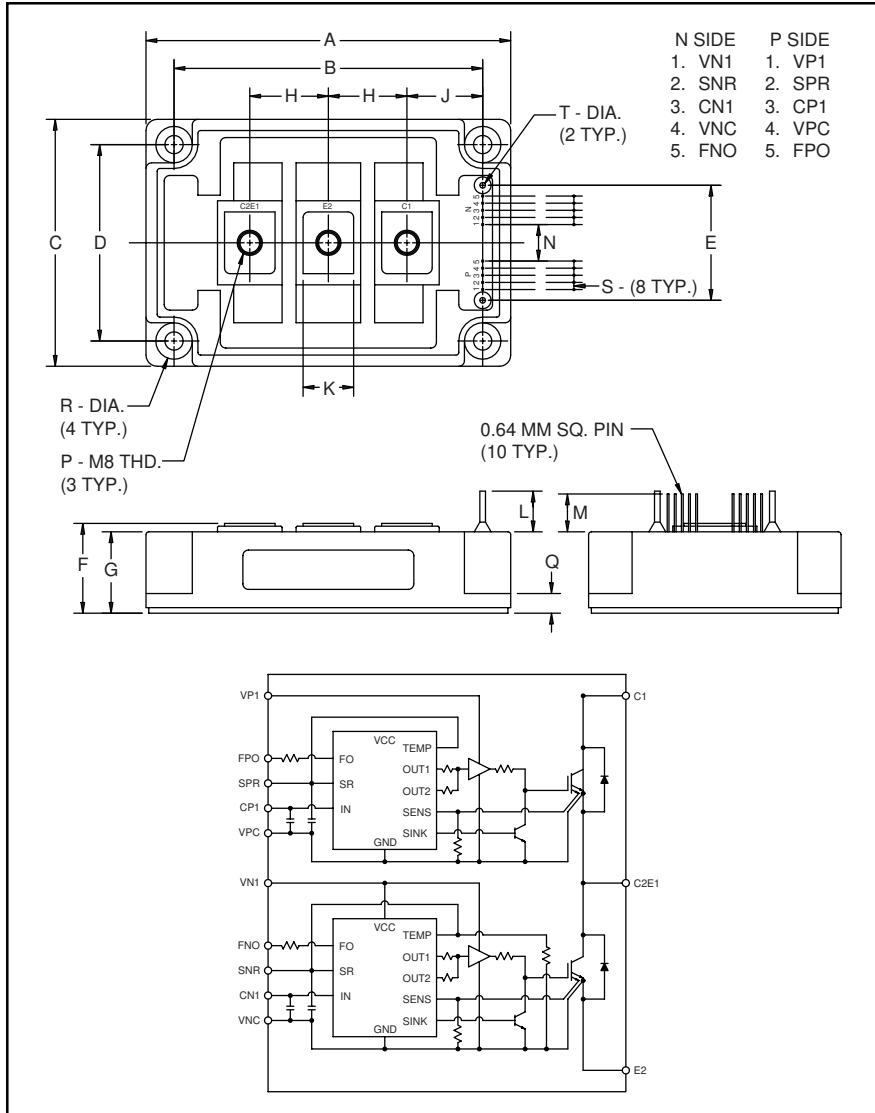

Outline Drawing and Circuit Diagram

| Dimensions | Inches           | Millimeters  |
|------------|------------------|--------------|
| A          | 5.12             | 130.0        |
| B          | 4.33±0.010       | 110.0±0.25   |
| C          | 3.54             | 90.0         |
| D          | 2.76±0.010       | 70.0±0.25    |
| E          | 1.61             | 41.0         |
| F          | 1.34 +0.04/-0.02 | 34.0 +1/-0.5 |
| G          | 1.22             | 31.0         |
| H          | 1.10             | 28.0         |
| J          | 1.06             | 27.0         |

| Dimensions | Inches    | Millimeters |
|------------|-----------|-------------|
| K          | 0.71      | 18.0        |
| L          | 0.57      | 14.5        |
| M          | 0.53      | 13.5        |
| N          | 0.51      | 13.0        |
| P          | M8 Metric | M8          |
| Q          | 0.28      | 7.0         |
| R          | 0.26 Dia. | Dia. 6.5    |
| S          | 0.100     | 2.54        |
| T          | 0.08 Dia. | Dia. 2.0    |



#### Description:

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

#### Features:

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage

#### Applications:

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

#### Ordering Information:

Example: Select the complete part number from the table below -i.e. PM600DSA060 is a 600V, 600 Ampere Intellimod™ Intelligent Power Module.

| Type | Current Rating<br>Amperes | V <sub>CE</sub><br>Volts (x 10) |
|------|---------------------------|---------------------------------|
| PM   | 600                       | 60                              |



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM600DSA060**  
**Intellimod™ Module**  
**Single Phase IGBT Inverter Output**  
**600 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics  | Symbol                 | PM600DSA060 | Units            |
|--|------------------------|-------------|------------------|
| Power Device Junction Temperature  | $T_j$                  | -20 to 150  | $^\circ\text{C}$ |
| Storage Temperature  | $T_{\text{stg}}$       | -40 to 125  | $^\circ\text{C}$ |
| Case Operating Temperature   | $T_C$                  | -20 to 100  | $^\circ\text{C}$ |
| Mounting Torque, M6 Mounting Screws  | —                      | 26          | in-lb            |
| Mounting Torque, M8 Main Terminal Screws   | —                      | 95          | in-lb            |
| Module Weight (Typical)  | —                      | 910         | Grams            |
| Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part) | $V_{\text{CC(prot.)}}$ | 400         | Volts            |
| Isolation Voltage, AC 1 minute, 60Hz Sinusoidal                                      | $V_{\text{RMS}}$       | 2500        | Volts            |

**Control Sector**

|  |                  |    |       |
|--|------------------|----|-------|
| Supply Voltage Applied between ( $V_{P1}-V_{PC}$ , $V_{N1}-V_{NC}$ )               | $V_D$            | 20 | Volts |
| Input Voltage Applied between ( $C_{P1}-V_{PC}$ , $C_{N1}-V_{NC}$ )                | $V_{\text{CIN}}$ | 10 | Volts |
| Fault Output Supply Voltage (Applied between $F_{po}-V_{pc}$ and $F_{no}-V_{nc}$ ) | $V_{\text{FO}}$  | 20 | Volts |
| Fault Output Current   | $I_{\text{FO}}$  | 20 | mA    |

**IGBT Inverter Sector**

|   |                        |      |         |
|---|------------------------|------|---------|
| Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 5\text{V}$ ) | $V_{\text{CES}}$       | 600  | Volts   |
| Collector Current, $\pm$  | $I_C$                  | 600  | Amperes |
| Peak Collector Current, $\pm$   | $I_{\text{CP}}$        | 1200 | Amperes |
| Supply Voltage (Applied between C1 - E2)  | $V_{\text{CC}}$        | 450  | Volts   |
| Supply Voltage, Surge (Applied between C1 - E2)                                 | $V_{\text{CC(surge)}}$ | 500  | Volts   |
| Collector Dissipation   | $P_C$                  | 1790 | Watts   |

**PM600DSA060**  
**Intellimod™ Module**  
**Single Phase IGBT Inverter Output**  
**600 Amperes/600 Volts**

## Electrical and Mechanical Characteristics, $T_j = 25^\circ\text{C}$ unless otherwise specified

| Characteristics                         | Symbol                | Test Conditions  | Min. | Typ. | Max. | Units            |
|---|-----------------------|--|------|------|------|------------------|
| <b>Control Sector</b>                   |                       |  |      |      |      |                  |
| Over Current Trip Level Inverter Part   | OC                    | $-20^\circ\text{C} \leq T \leq 125^\circ\text{C}$  | 740  | 1000 | —    | Amperes          |
| Short Circuit Trip Level Inverter Part  | SC                    | $-20^\circ\text{C} \leq T \leq 125^\circ\text{C}$  | 1000 | 1400 | —    | Amperes          |
| Over Current Delay Time                 | $t_{\text{off(OC)}}$  | $V_D = 15\text{V}$   | —    | 5    | —    | $\mu\text{S}$    |
| Over Temperature Protection             | OT                    | Trip Level   | 100  | 110  | 120  | $^\circ\text{C}$ |
|   | $OT_R$                | Reset Level  | 85   | 95   | 105  | $^\circ\text{C}$ |
| Supply Circuit Under Voltage Protection | UV                    | Trip Level   | 11.5 | 12.0 | 12.5 | Volts            |
|   | $UV_R$                | Reset Level  | —    | 12.5 | —    | Volts            |
| Supply Voltage                          | $V_D$                 | Applied between $V_{P1}-V_{PC}$ , $V_{N1}-V_{NC}$  | 13.5 | 15   | 16.5 | Volts            |
| Circuit Current                         | $I_D$                 | $V_D = 15\text{V}$ , $V_{CIN} = 5\text{V}$ , $V_{N1}-V_{NC}$   | —    | 23   | 30   | mA               |
|   |                       | $V_D = 15\text{V}$ , $V_{CIN} = 5\text{V}$ , $V_{XP1}-V_{XPC}$   | —    | 23   | 30   | mA               |
| Input ON Threshold Voltage              | $V_{CIN(\text{on})}$  | Applied between  | 1.2  | 1.5  | 1.8  | Volts            |
| Input OFF Threshold Voltage             | $V_{CIN(\text{off})}$ | $C_{P1}-V_{PC}$ , $C_{N1}-V_{NC}$  | 1.7  | 2.0  | 2.3  | Volts            |
| PWM Input Frequency                     | $f_{\text{PWM}}$      | 3- $\emptyset$ Sinusoidal  | —    | 15   | 20   | kHz              |
| Fault Output Current                    | $I_{\text{FO(H)}}$    | $V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$  | —    | —    | 0.01 | mA               |
|   | $I_{\text{FO(L)}}$    | $V_D = 15\text{V}$ , $V_{\text{FO}} = 15\text{V}$  | —    | 10   | 15   | mA               |
| Minimum Fault Output Pulse Width        | $t_{\text{FO}}$       | $V_D = 15\text{V}$   | 1.0  | 1.8  | —    | mS               |
| SXR Terminal Output Voltage             | $V_{\text{SXR}}$      | $T_j \leq 125^\circ\text{C}$ , $R_{\text{in}} = 6.8 \text{ k}\Omega$ ( $S_{\text{PR}}$ , $S_{\text{NR}}$ ) | 4.5  | 5.1  | 5.6  | Volts            |

**PM600DSA060**  
**Intellimod™ Module**  
**Single Phase IGBT Inverter Output**  
**600 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

| Characteristics                      | Symbol        | Test Conditions   | Min. | Typ. | Max. | Units         |
|--------------------------------------|---------------|---|------|------|------|---------------|
| <b>IGBT Inverter Sector</b>          |               |   |      |      |      |               |
| Collector Cutoff Current             | $I_{CEX}$     | $V_{CE} = V_{CEX}, T_j = 25^\circ\text{C}$  | —    | —    | 1    | mA            |
|                                      |               | $V_{CE} = V_{CEX}, T_j = 125^\circ\text{C}$   | —    | —    | 10   | mA            |
| Diode Forward Voltage                | $V_{FM}$      | $-I_C = 600\text{A}, V_D = 15\text{V}, V_{CIN} = 5\text{V}$                         | —    | 1.9  | 2.8  | Volts         |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 600\text{A}$                          | —    | 1.8  | 2.6  | Volts         |
|                                      |               | $V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 600\text{A}, T_j = 125^\circ\text{C}$ | —    | 1.9  | 2.7  | Volts         |
| Inductive Load Switching Times       | $t_{on}$      |   | 0.5  | 1.4  | 2.5  | $\mu\text{S}$ |
|                                      | $t_{rr}$      | $V_D = 15\text{V}, V_{CIN} = 0 \sim 5\text{V}$                                      | —    | 0.15 | 0.3  | $\mu\text{S}$ |
|                                      | $t_{C(on)}$   | $V_{CC} = 300\text{V}, I_C = 600\text{A}$   | —    | 0.4  | 1.0  | $\mu\text{S}$ |
|                                      | $t_{off}$     | $T_j = 125^\circ\text{C}$   | —    | 2.0  | 3.0  | $\mu\text{S}$ |
|                                      | $t_{C(off)}$  |   | —    | 0.5  | 1.0  | $\mu\text{S}$ |










**Thermal Characteristics**

| Characteristic                      | Symbol         | Condition  | Min. | Typ. | Max.  | Units                        |
|-------------------------------------|----------------|--|------|------|-------|------------------------------|
| Junction to Case Thermal Resistance | $R_{th(j-c)Q}$ | Each IGBT  | —    | —    | 0.07  | $^\circ\text{C}/\text{Watt}$ |
|                                     | $R_{th(j-c)D}$ | Each FWDi  | —    | —    | 0.13  | $^\circ\text{C}/\text{Watt}$ |
| Contact Thermal Resistance          | $R_{th(c-f)}$  | Case to Fin Per Module<br>Thermal Grease Applied | —    | —    | 0.030 | $^\circ\text{C}/\text{Watt}$ |

**Recommended Conditions for Use**


| Characteristic      | Symbol         | Condition                                      | Value              | Units         |
|---------------------|----------------|--|--------------------|---------------|
| Supply Voltage      | $V_{CC}$       | Applied across C1-E2 Terminals                 | 0 ~ 400            | Volts         |
|                     | $V_D$          | Applied between $V_{P1}-V_{PC}, V_{N1}-V_{NC}$ | $15 \pm 1.5$       | Volts         |
| Input ON Voltage    | $V_{CIN(on)}$  | Applied between                                | 0 ~ 0.8            | Volts         |
| Input OFF Voltage   | $V_{CIN(off)}$ | $C_{P1}-V_{PC}, C_{N1}-V_{NC}$                 | $4.0 \sim V_{SXR}$ | Volts         |
| PWM Input Frequency | $f_{PWM}$      | Using Application Circuit                      | 5 ~ 20             | kHz           |
| Minimum Dead Time   | $t_{DEAD}$     | Input Signal                                   | $\geq 3.5$         | $\mu\text{S}$ |

**PM600DSA060**  
**Intellimod™ Module**  
**Single Phase IGBT Inverter Output**  
**600 Amperes/600 Volts**

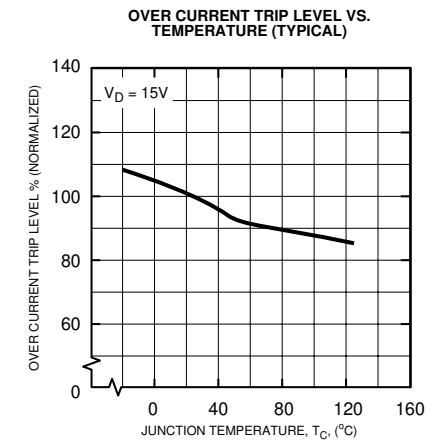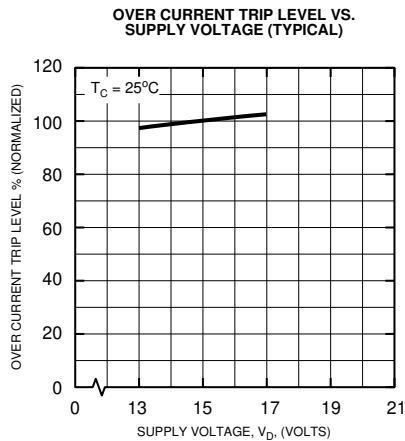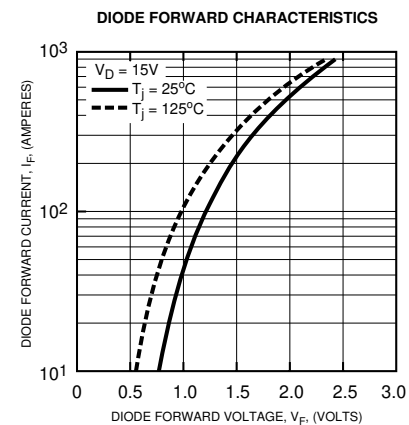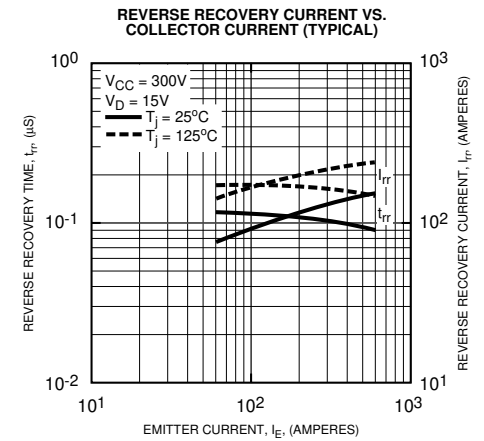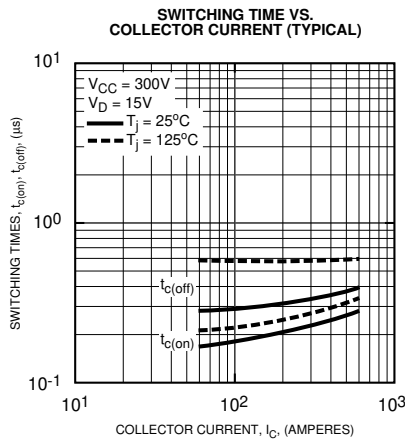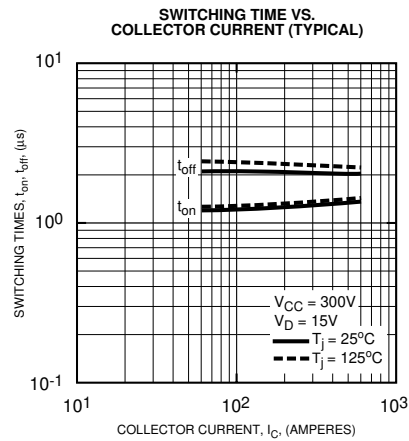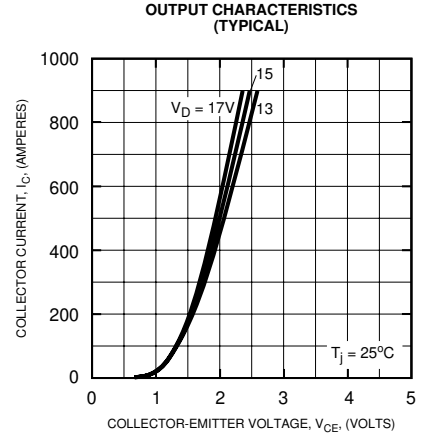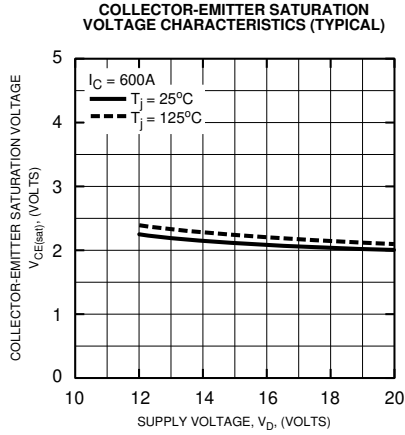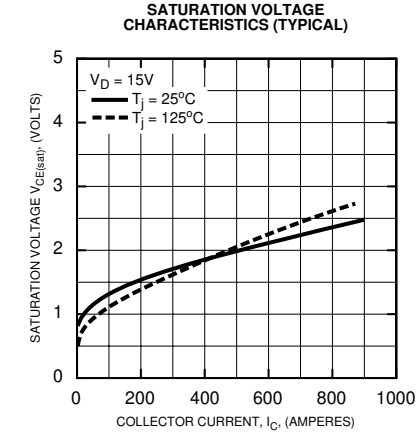


**PM600DSA060**  
**Intellimod™ Module**  
**Single Phase IGBT Inverter Output**  
**600 Amperes/600 Volts**


**FAULT OUTPUT PULSE WIDTH VS. TEMPERATURE (TYPICAL)**

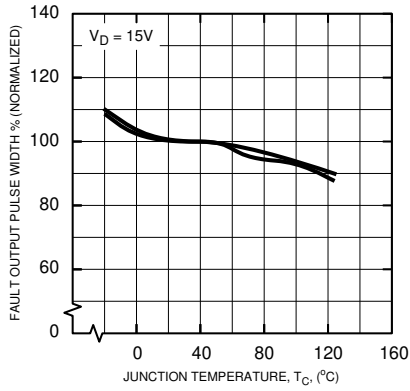

**CONTROL SUPPLY VOLTAGE TRIP-RESET LEVEL TEMPERATURE DEPENDENCY (TYPICAL)**

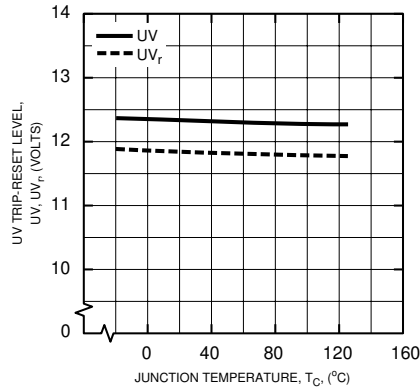

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (IGBT)**

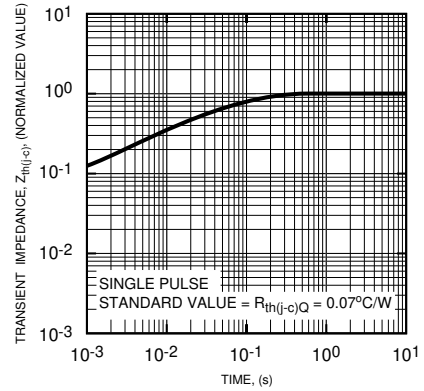

**TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS (FWDi)**

