



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

**Intellimod™ Module**  
**Three Phase + Brake**  
**IGBT Inverter Output**  
**75 Amperes/600 Volts**

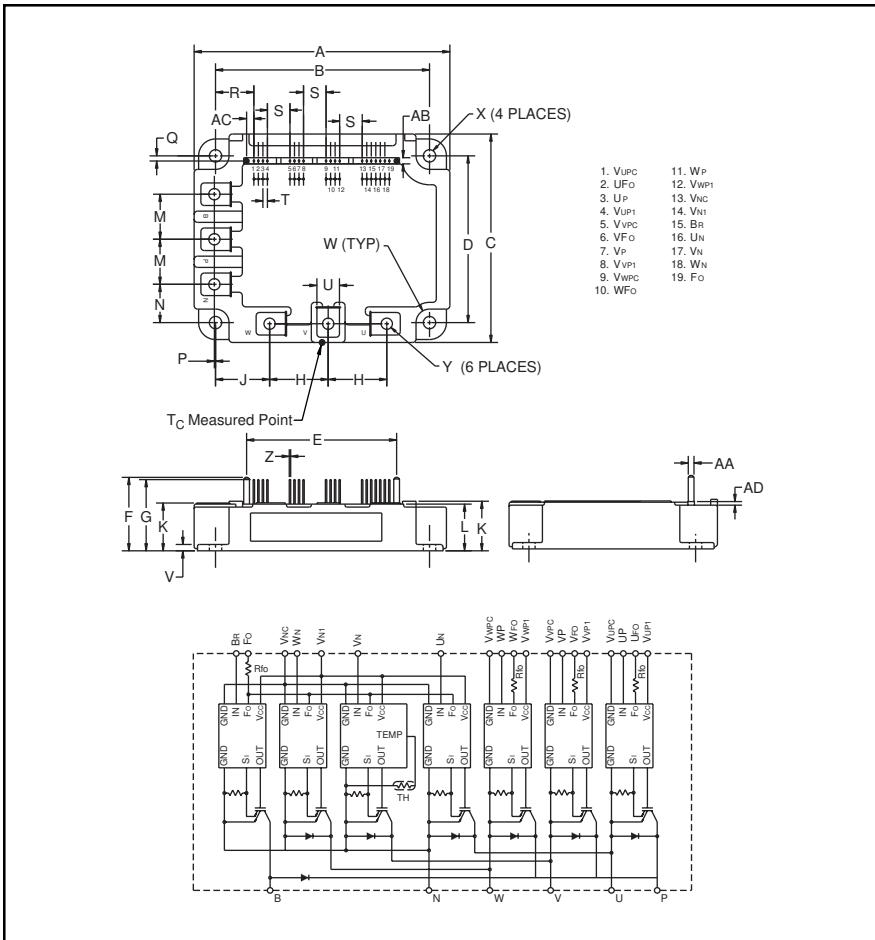

**Description:**

Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

**Features:**

- Complete Output Power Circuit
- Gate Drive Circuit
- Protection Logic
  - Short Circuit
  - Over Current
  - Over Temperature
  - Under Voltage
- Low Loss Using 4th Generation IGBT Chip

**Applications:**

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

**Ordering Information:**

Example: Select the complete part number from the table below  
 -i.e. PM75RSD060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.33±0.04	110.0±1.0
B	3.74±0.02	95.0±0.5
C	3.50±0.04	89.0±1.0
D	2.91±0.02	74.0±0.5
E	2.62	66.44
F	1.28	32.6
G	1.24	31.6
H	1.02	26.0
J	0.94	24.0
K	0.87 +0.04/-0.02	22.0 +1.0/-0.5
L	0.84	21.2
M	0.79	20.0
N	0.69	17.5
P	0.02±0.01	0.5±0.3

Dimensions	Inches	Millimeters
Q	0.08±0.02	2.0±0.5
R	0.670	17.02
S	0.39	10.0
T	0.08	2.0
U	0.39	10.0
V	0.16	4.0
W	0.24 Rad.	Rad. 6.0
X	0.217 Dia.	M5.5
Y	0.197	M5
Z	0.2 Sq.	Sq. 0.5
AA	0.10	2.54
AB	0.18	4.5
AC	0.13	3.22
AD	0.06	1.6

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	75	60



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM75RSD060**

**Intellimod™ Module**

**Three Phase + Brake IGBT Inverter Output**

75 Amperes/600 Volts

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM75RSD060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Case Operating Temperature	$T_C$	-20 to 100	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Mounting Torque, M5 Main Terminal Screws	—	31	in-lb
Module Weight (Typical)	—	560	Grams
Supply Voltage Protected by OC and SC ( $V_D = 13.5 - 16.5\text{V}$ , Inverter Part) $T_j = 125^\circ\text{C}$	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{\text{ISO}}$	2500	Volts

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_C$	75	Amperes
Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_{\text{CP}}$	150	Amperes
Supply Voltage (Applied between P - N)	$V_{\text{CC}}$	450	Volts
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	500	Volts
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	255	Watts

**IGBT Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_C$	30	Amperes
Peak Collector Current, $\pm$ ( $T_C = 25^\circ\text{C}$ )	$I_{\text{CP}}$	60	Amperes
FWDi Rated DC Reverse Voltage ( $T_C = 25^\circ\text{C}$ )	$V_{\text{R(DC)}}$	600	Volts
FWDi Forward Current ( $T_C = 25^\circ\text{C}$ )	$I_F$	30	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	176	Watts

**Control Sector**

Supply Voltage Applied between ( $V_{\text{UP1}}-V_{\text{UPC}}$ , $V_{\text{VP1}}-V_{\text{VPC}}$ , $V_{\text{WP1}}-V_{\text{WPC}}$ , $V_{\text{N1}}-V_{\text{NC}}$ )	$V_D$	20	Volts
Input Voltage Applied between ( $\text{Up}-V_{\text{UPC}}$ , $\text{Vp}-V_{\text{VPC}}$ , $\text{Wp}-V_{\text{WPC}}$ , $\text{UN}-V_{\text{N}}-\text{WN}-\text{Br}-V_{\text{NC}}$ )	$V_{\text{CIN}}$	20	Volts
Fault Output Supply Voltage (Applied between $F_O$ and $V_C$ )	$V_{\text{FO}}$	20	Volts
Fault Output Current ( $U_{\text{FO}}$ , $V_{\text{FO}}$ , $W_{\text{FO}}$ , $F_O$ )	$I_{\text{FO}}$	20	mA



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM75RSD060**

**Intellimod™ Module**

**Three Phase + Brake IGBT Inverter Output**

**75 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, T_j = 125^\circ\text{C},$ $V_D = 15\text{V}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 75\text{A}, V_D = 15\text{V}, V_{CIN} = 15\text{V}$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ $T_j = 25^\circ\text{C}$	—	1.7	2.3	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 75\text{A},$ $T_j = 125^\circ\text{C}$	—	1.7	2.3	Volts
Inductive Load Switching Times	$t_{on}$		0.8	1.2	2.4	$\mu\text{S}$
	$t_{rr}$	$V_D = 15\text{V}, V_{CIN} = 0 \sim 15\text{V}$	—	0.15	0.3	$\mu\text{S}$
	$t_{C(on)}$	$V_{CC} = 300\text{V}, I_C = 75\text{A}$	—	0.4	1.0	$\mu\text{S}$
	$t_{off}$	$T_j = 125^\circ\text{C}$	—	2.4	3.3	$\mu\text{S}$
	$t_{C(off)}$		—	0.6	1.2	$\mu\text{S}$

**IGBT Brake Sector**

Collector Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, T_j = 25^\circ\text{C},$ $V_D = 15\text{V}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, T_j = 125^\circ\text{C},$ $V_D = 15\text{V}$	—	—	10	mA
FWDi Forward Voltage	$V_{FM}$	$-I_F = 30\text{A}$	—	2.5	3.5	Volts
Collector-Emitter Saturation Voltage	$V_{CE(\text{sat})}$	$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A},$ $T_j = 25^\circ\text{C}$	—	1.8	2.5	Volts
		$V_D = 15\text{V}, V_{CIN} = 0\text{V}, I_C = 30\text{A},$ $T_j = 125^\circ\text{C}$	—	1.9	2.6	Volts



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM75RSD060**

**Intellimod™ Module**

**Three Phase + Brake IGBT Inverter Output**

75 Amperes/600 Volts

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>Control Sector</b>						
Over Current Trip Level Inverter Part ( $V_D = 15\text{V}$ )	OC	$T_j = -20^\circ\text{C}$ $T_j = 25^\circ\text{C}$ $T_j = 125^\circ\text{C}$	— 192 115	— 226 —	380 320 —	Amperes
Over Current Trip Level Brake Part	OC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15\text{V}$	39	53	—	Amperes
Short Circuit Trip Level Inverter Part	SC	$-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15\text{V}$	—	241	—	Amperes
Short Circuit Trip Level Brake Part			—	79	—	Amperes
Over Current Delay Time	$t_{off(OC)}$	$V_D = 15\text{V}$	—	10	—	$\mu\text{s}$
Over Temperature Protection ( $V_D = 15\text{V}$ ) (Lower Arm)	OT $O_{TR}$	Trip Level Reset Level	111 —	118 100	125 —	$^\circ\text{C}$
Supply Circuit Under Voltage Protection ( $-20 \leq T_j \leq 125^\circ\text{C}$ )	UV $UV_R$	Trip Level Reset Level	11.5 —	12.0 12.5	12.5 —	Volts
Circuit Current	$I_D$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{N1}-V_{NC}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}, V_{XP1}-V_{XPC}$	— —	44 13	60 18	mA
Input ON Threshold Voltage	$V_{CIN(on)}$	Applied between $U_p-V_{UPC}, V_p-V_{VPC}$	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{CIN(off)}$	$W_p-V_{WPC}, U_N, V_N, W_N, B_r-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$ $I_{FO(L)}$	$V_D = 15\text{V}, V_{CIN} = 15\text{V}$ $V_D = 15\text{V}, V_{CIN} = 15\text{V}$	— —	— 10	0.01 15	mA
Minimum Fault Output Pulse Width*	$t_{FO}$	$V_D = 15\text{V}$	1.0	1.8	—	$\text{mS}$

\*Fault output is given only when the internal OC, SC, OT and UV protections schemes of either upper or lower devide operate to protect it.



Powerex, Inc., 200 Hillis Street, Youngwood, Pennsylvania 15697-1800 (724) 925-7272

**PM75RSD060**  
**Intellimod™ Module**  
**Three Phase + Brake IGBT Inverter Output**  
75 Amperes/600 Volts

### Thermal Characteristics

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Each IGBT	—	—	0.49	°C/Watt
Inverter Part	$R_{th(j-c)F}$	Each FWDi	—	—	1.38	°C/Watt
	$R_{th(j-c')Q}$	Each IGBT*	—	—	0.30**	°C/Watt
	$R_{th(j-c')F}$	Each FWDi*	—	—	0.47**	°C/Watt
	$R_{th(j-c)Q}$	Each IGBT	—	—	0.71	°C/Watt
Brake Part	$R_{th(j-c)F}$	Each FWDi	—	—	1.66	°C/Watt
	$R_{th(j-c')Q}$	Each IGBT*	—	—	0.45**	°C/Watt
	$R_{th(j-c')F}$	Each FWDi*	—	—	0.96**	°C/Watt
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied	—	—	0.027	°C/Watt

\*  $T_C$  measured point is just under chip.

\*\*If you use this value,  $R_{th(f-a)}$  should be measured just under the chips.

### Recommended Conditions for Use

Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	0 ~ 400	Volts
Control Supply Voltage***	$V_D$	Applied between $V_{UP1}-V_{UPC}$ , $V_{N1}-V_{NC}$ , $V_{VP1}-V_{VPC}$ , $V_{WP1}-V_{WPC}$	15 ± 1.5	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between $U_P-V_{UPC}$ , $V_P-V_{VPC}$ ,	0 ~ 0.8	Volts
Input OFF Voltage	$V_{CIN(off)}$	$W_P-V_{WPC}$ , $U_N$ , $V_N$ , $W_N$ , $B_r-V_{NC}$	4.0 ~ $V_D$	Volts
PWM Input Frequency	$f_{PWM}$	Using Application Circuit	0 ~ 20	kHz
Minimum Dead Time	$t_{DEAD}$	Input Signal	≥ 2.5	μS

\*\*\* With ripple satisfying the following conditions:  $dv/dt$  swing ≤ ±5V/μs, Variation ≤ 2V peak to peak.

**PM75RSD060**

**Intellimod™ Module**

**Three Phase + Brake IGBT Inverter Output**

75 Amperes/600 Volts

