

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








# DISCRETE SEMICONDUCTORS

# DATA SHEET



# PMEM4010ND NPN transistor/Schottky diode module

Product data sheet Supersedes data of 2002 Oct 28 2003 Jul 04



# NPN transistor/Schottky diode module

### PMEM4010ND

#### **FEATURES**

- 600 mW total power dissipation
- · High current capability
- · Reduces required PCB area
- · Reduced pick and place costs
- Small plastic SMD package.

#### **Transistor:**

· Low collector-emitter saturation voltage.

#### Diode:

- Ultra high-speed switching
- · Very low forward voltage
- Guard ring protected.

#### **APPLICATIONS**

- DC/DC convertors
- · Inductive load drivers
- · General purpose load drivers
- Reverse polarity protection circuits.


#### **DESCRIPTION**

Combination of an NPN transistor with low  $V_{CEsat}$  and high current capability and a planar Schottky barrier diode with an integrated guard ring for stress protection in a SOT457 (SC-74) small plastic package.

PNP complement: PMEM4010PD.

#### **PINNING**

PIN	DESCRIPTION			
1	emitter			
2	not connected			
3	cathode			
4	anode			
5	base			
6	collector			

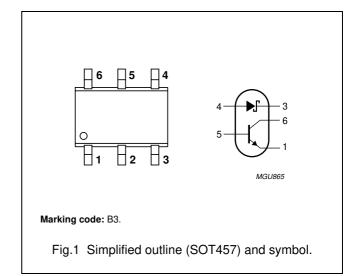

# NPN transistor/Schottky diode module

PMEM4010ND

#### **LIMITING VALUES**

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
NPN trans	istor		<u>.</u>		
V <sub>CBO</sub>	collector-base voltage	open emitter	_	40	V
V <sub>CEO</sub>	collector-emitter voltage	open base	_	40	V
V <sub>EBO</sub>	emitter-base voltage	open collector	_	5	V
Ic	collector current (DC)		_	1	Α
I <sub>CM</sub>	peak collector current		_	2	Α
I <sub>BM</sub>	peak base current		_	1	Α
T <sub>j</sub> junction temperature			_	150	°C
Schottky I	parrier diode	•	•	•	•
V <sub>R</sub>	continuous reverse voltage		_	20	V
I <sub>F</sub>	continuous forward current		_	1	Α
I <sub>FSM</sub>	non repetitive peak forward current	t = 8.3 ms half sinewave; JEDEC method	-	5	А
Tj	junction temperature		_	125	°C
Combined	device	·	•	•	·
P <sub>tot</sub>	total power dissipation	T <sub>amb</sub> ≤ 25 °C; note 1	_	600	mW
T <sub>stg</sub>	storage temperature		-65	+150	°C
T <sub>amb</sub>	operating ambient temperature	note 2	-65	+125	°C

#### **Notes**

- 1. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 1 cm<sup>2</sup>.
- 2. For Schottky barrier diodes thermal run-away has to be considered, as in some applications the reverse power losses  $P_R$  are significant part of the total power losses. Nomograms for determination of the reverse power losses  $P_R$  and  $I_F$  (AV) rating will be available on request.

#### THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
R <sub>th j-a</sub>	thermal resistance from junction to ambient	in free air; note 1	208	K/W

#### Note

1. Device mounted on a printed-circuit board; single sided copper; tinplated; mounting pad for collector 1 cm<sup>2</sup>.

# NPN transistor/Schottky diode module

# PMEM4010ND

#### **ELECTRICAL CHARACTERISTICS**

 $T_{amb}$  = 25 °C unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT		
NPN transistor								
I <sub>CBO</sub>	collector-base cut-off current	V <sub>CB</sub> = 40 V; I <sub>E</sub> = 0	_	_	100	nA		
		V <sub>CB</sub> = 40 V; I <sub>E</sub> = 0; T <sub>amb</sub> = 150 °C	_	_	50	μА		
I <sub>CEO</sub>	collector-emitter cut-off current	V <sub>CE</sub> = 30 V; I <sub>B</sub> = 0	_	_	100	nA		
I <sub>EBO</sub>	emitter-base cut-off current	V <sub>EB</sub> = 5 V; I <sub>C</sub> = 0	_	_	100	nA		
h <sub>FE</sub>	DC current gain	$V_{CE} = 5 \text{ V}; I_{C} = 1 \text{ mA}$	300	_	_			
		V <sub>CE</sub> = 5 V; I <sub>C</sub> = 500 mA	300	_	900			
		V <sub>CE</sub> = 5 V; I <sub>C</sub> = 1 A	200	_	_			
V <sub>CEsat</sub>	collector-emitter saturation voltage	I <sub>C</sub> = 100 mA; I <sub>B</sub> = 1 mA	_	_	80	mV		
		I <sub>C</sub> = 500 mA; I <sub>B</sub> = 50 mA	_	_	110	mV		
		I <sub>C</sub> = 1 A; I <sub>B</sub> = 100 mA	_	_	210	mV		
V <sub>BEsat</sub>	base-emitter saturation voltage	I <sub>C</sub> = 1 A; I <sub>B</sub> = 100 mA	_	_	1.2	V		
R <sub>CEsat</sub>	equivalent on-resistance	$I_C = 500 \text{ mA}$ ; $I_B = 50 \text{ mA}$ ; note 1	_	260	<220	mΩ		
V <sub>BEon</sub>	base-emitter turn-on voltage	V <sub>CE</sub> = 5 V; I <sub>C</sub> = 1 A	_	_	1.1	V		
f <sub>T</sub>	transition frequency	I <sub>C</sub> = 50 mA; V <sub>CE</sub> = 10 V; f = 100 MHz	150	_	_	MHz		
C <sub>c</sub>	collector capacitance	$V_{CB} = 10 \text{ V}; I_{E} = I_{e} = 0 \text{ ; } f = 1 \text{ MHz}$	_	_	10	pF		
Schottky I	parrier diode			•				
V <sub>F</sub>	continuous forward voltage	I <sub>F</sub> = 10 mA; note 1	_	240	270	mV		
		I <sub>F</sub> = 100 mA; note 1	_	300	350	mV		
		I <sub>F</sub> = 1000 mA; see Fig.7; note 1	_	480	550	mV		
I <sub>R</sub>	reverse current	V <sub>R</sub> = 5 V; note 1	_	5	10	μΑ		
		V <sub>R</sub> = 8 V; note 1	-	7	20	μА		
		V <sub>R</sub> = 15 V; see Fig.8; note 1	-	10	50	μА		
C <sub>d</sub>	diode capacitance	V <sub>R</sub> = 5 V; f = 1 MHz; see Fig.9	_	19	25	pF		

#### Note


1. Pulse test:  $t_p \leq 300~\mu s;~\delta \leq 0.02.$ 

2003 Jul 04

# NPN transistor/Schottky diode module

### PMEM4010ND


#### **GRAPHICAL DATA**



NPN transistor;  $V_{CE} = 5 \text{ V}.$ 

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .


Fig.2 DC current gain as a function of collector current; typical values.



NPN transistor;  $V_{CE} = 5 \text{ V}.$ 

- (1)  $T_{amb} = -55 \, ^{\circ}C$
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = 150 \, ^{\circ}C.$


Fig.3 Base-emitter voltage as a function of collector current; typical values.



NPN transistor;  $I_C/I_B = 10$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.4 Collector-emitter saturation voltage as a function of collector current; typical values.




NPN transistor;  $I_C/I_B = 10$ .

- (1)  $T_{amb} = 150 \, ^{\circ}C$ .
- (2)  $T_{amb} = 25 \, ^{\circ}C$ .
- (3)  $T_{amb} = -55 \, ^{\circ}C$ .

Fig.5 Equivalent on-resistance as a function of collector current; typical values.


# NPN transistor/Schottky diode module

### PMEM4010ND



NPN transistor;  $V_{CE} = 10 \text{ V}.$ 


Fig.6 Transition frequency as a function of collector current.



Schottky barrier diode.

- (1)  $T_{amb} = 125 \, ^{\circ}C$ .
- (2)  $T_{amb} = 85 \, ^{\circ}C$ .
- (3)  $T_{amb} = 25 \, ^{\circ}C$ .


Fig.7 Forward current as a function of forward voltage; typical values.



### Schottky barrier diode.

- (1)  $T_{amb} = 125 \, ^{\circ}C$ .
- (2)  $T_{amb} = 85 \, ^{\circ}C$ .
- (3)  $T_{amb} = 25 \, ^{\circ}C$ .

Fig.8 Reverse current as a function of reverse voltage; typical values.




Schottky barrier diode; f = 1 MHz;  $T_{amb} = 25 \,^{\circ}\text{C}$ .


Fig.9 Diode capacitance as a function of reverse voltage; typical values.

# NPN transistor/Schottky diode module

# PMEM4010ND

#### **APPLICATION INFORMATION**

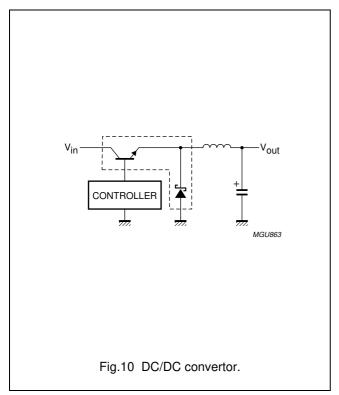

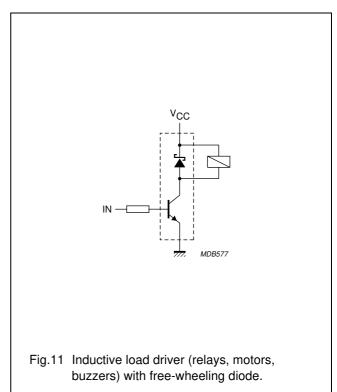


# NPN transistor/Schottky diode module

# PMEM4010ND

#### **PACKAGE OUTLINE**

#### Plastic surface mounted package; 6 leads

**SOT457** 

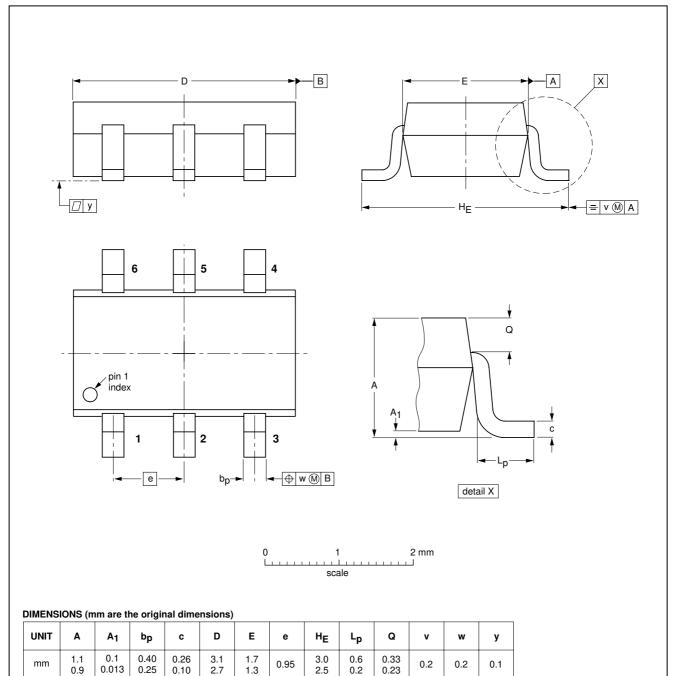

OUTLINE		REFERENCES		EUROPEAN	ISSUE DATE	
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE
SOT457			SC-74			<del>97-02-28</del> 01-05-04

### NPN transistor/Schottky diode module

#### PMEM4010ND

#### **DATA SHEET STATUS**

DOCUMENT STATUS(1)	PRODUCT STATUS <sup>(2)</sup>	DEFINITION
Objective data sheet	Development	This document contains data from the objective specification for product development.
Preliminary data sheet	Qualification	This document contains data from the preliminary specification.
Product data sheet	Production	This document contains the product specification.

#### **Notes**

- 1. Please consult the most recently issued document before initiating or completing a design.
- 2. The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nxp.com.

#### **DISCLAIMERS**

**General** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in medical, military, aircraft, space or life support equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings

System of IEC 60134) may cause permanent damage to the device. Limiting values are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of this document is not implied. Exposure to limiting values for extended periods may affect device reliability.

Terms and conditions of sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nxp.com/profile/terms, including those pertaining to warranty, intellectual property rights infringement and limitation of liability, unless explicitly otherwise agreed to in writing by NXP Semiconductors. In case of any inconsistency or conflict between information in this document and such terms and conditions, the latter will prevail.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

2003 Jul 04

# **NXP Semiconductors**

#### **Customer notification**

This data sheet was changed to reflect the new company name NXP Semiconductors. No changes were made to the content, except for the legal definitions and disclaimers.

#### **Contact information**

For additional information please visit: http://www.nxp.com

For sales offices addresses send e-mail to: salesaddresses@nxp.com

© NXP B.V. 2009

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Printed in The Netherlands 613514/02/pp10 Date of release: 2003 Jul 04 Document order number: 9397 750 11317

