

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








	ITEM ①	ITEM ②	ITEM ③	ІТЕМ ④	ITEM ⑤	ITEM 🚳	ІТЕМ 🗇
PART NUMBER	BODY	CONTACT	INTERFACE	INSULATOR	SLEEVE	COVER RING	END CAP
	COLD PL .00001 MIN OVER NICKEL PL .DDQ15 MIN OVER	GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER		TEFLON	GOLD PL .DDDQ1 MIN OVER NICKEL PL .00005 MIN OVER	NICKEL PL .00005 MIN OVER	BRASS GOLD PL .00001 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .0DDD5 MIN
	NICKEL PL .DDQ15 MIN QVER	BERYLLIUM COPPER GÖLD PL .00003 MIN ÖVER NICKEL PL .00005 MIN ÖVER COPPER PL .00005 MIN		TEFLON	NICKEL PL .0001 MIN OVER	PHOSPHOR BRONZE NICKEL PL .0001 MIN OVER COPPER PL .000D5 MIN	BRASS NICKEL PL .0001 MIN OVER COPPER PL .0DDD5 MIN

DRAWING NO. () – 131-8403-111/120 REVISIONS 0 ENGINEERING RELEASE

5-26-98 R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S | R S



NOTES:

1. SPECIFICATIONS:

MPEDANCE: 75 OHMS
FREQUENCY RANCE: 0-2 CHZ
VSWR: 1.35-.04 F (F IN CHZ)
WORKING VOLTAGE: 335 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MIN AT SEA LEVEL
INSULATION RESISTANCE: 1000 MECOHM MIN
CONTACT RESISTANCE:
CENTER CONTACT - INITIAL 12 MILLIOHM MAX, AFTER
ENVIRONMENTAL 16 MILLIOHM MAX,
AFTER ENVIRONMENTAL 1. MILLIOHM MAX,
AFTER ENVIRONMENTAL 1. SMILLIOHM MAX,
AFTER ENVIRONMENTAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL 3.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL 3.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
NICKEL PLATED INITIAL 1 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
NICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
NICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE
VICKEL PLATED INITIAL 2.5 MILLIOHM MAX,
AFTER ENVIRONMENTAL NOT APPLICABLE


CORONA LEVEL: 250 VOLTS MIN AT 70,000 FEET INSERTION LOSS: .60 dB MAX AT 1.5 GHZ
RF LEAKAGE: -55 dB MIN AT 2 GHZ
RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 700 VRMS MIN AT 4 AND 7 MHZ


MECHANICAL:

ENGAGE/DISENGAGE FORCE: INITIAL 14 LBS MAX, AFTER DURABILITY 14 LBS MAX ENGAGEMENT/2 LBS MIN DISENGAGEMENT MATING TORQUE: NOT APPLICABLE COUPLING PROOF TORQUE: NOT APPLICABLE COUPLING NUT RETENSION: NOT APPLICABLE COUPLING NUT RETENSION: NOT APPLICABLE
CONTACT RETENSION: 4 LBS MIN AXIAL FORCE
CABLE ACCEPTABILITY: RG179/U, RG187/U
CABLE HEX CRIMP SIZE: 172B
CABLE RETENSION: 20 LBS MIN OR CABLE BREAKING STRENGTH
DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012)
THERMAL SHOCK: MIL-STD-2D2, METHOD 107, CONDITION B
OPERATING TEMPERATURE: -65 DEG C TO 165 DEG C
CORROSION: MIL-STD-202, METHOD 101, CONDITION B
SHOCK: MIL-STD-202, METHOD 213, CONDITION B
VIBRATION: MIL-STD-202, METHOD 204, CONDITION B

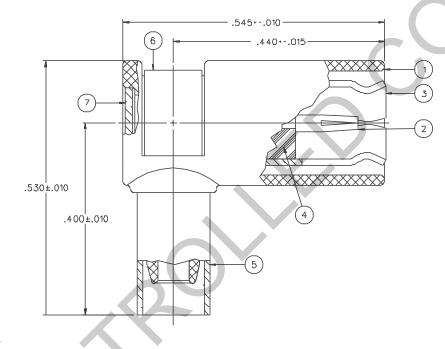



CABLE STRIP DIMENSIONS

CUSTOMER DRAWING

THIS DRAWING TO BE INTERPRETED PER ANSIY 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

TOLERANCE UNLESS OTHERWISE SPECIFIED	DRAWN BY SWC	DATE 5-5-9B	Clinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8255				
DECIMALS mm	CHECKED BY SWC	DATE 5-25-98	PLUG ASSEMBLY,				
MATL	APPROVEO BY TAK	DATE 5-26-98	MINI 75 OHM SMB, RG 179				
FINISH	APPROVED BY RJB	DATE CODE NO. DRAWING NO					
	RELEASE DATE		SCALE 10:1 U/M INCH SHEET 2 OF 2				