



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





October 31, 2005

PQ-MDS-PCIEXP PCI Expansion Adaptor Board 084-00195-1

User's manual



Table of Contents

1. General	3
2. Form factor.....	3
3. Power sequence.....	4
4. Data interface	5
5. Compatibility	5
6. Identification	5
7. Interrupts	6




1. General

This document details technical specification of the PCI Expansion Adapter Board (**PQ-MDS-PCIEXP**) targeted be used with 83xx I/O board to provide standard PCI slot's data interface to Host CPU and power supply to inserted PCI cards.

2. Form factor

PQ-MDS-PCIEXP realized as single PCB board to provide interconnections between corresponding ATCA PMC connectors placed on the **PQ-MDS-PIB** Platform I/O Board and standard PCI slots. ATX PS connector provides accessing to external PS guaranteeing powering of the PCI cards inserted into the slots. Layout of the **PQ-MDS-PCIEXP** represented in the Figure 1.

Figure 1

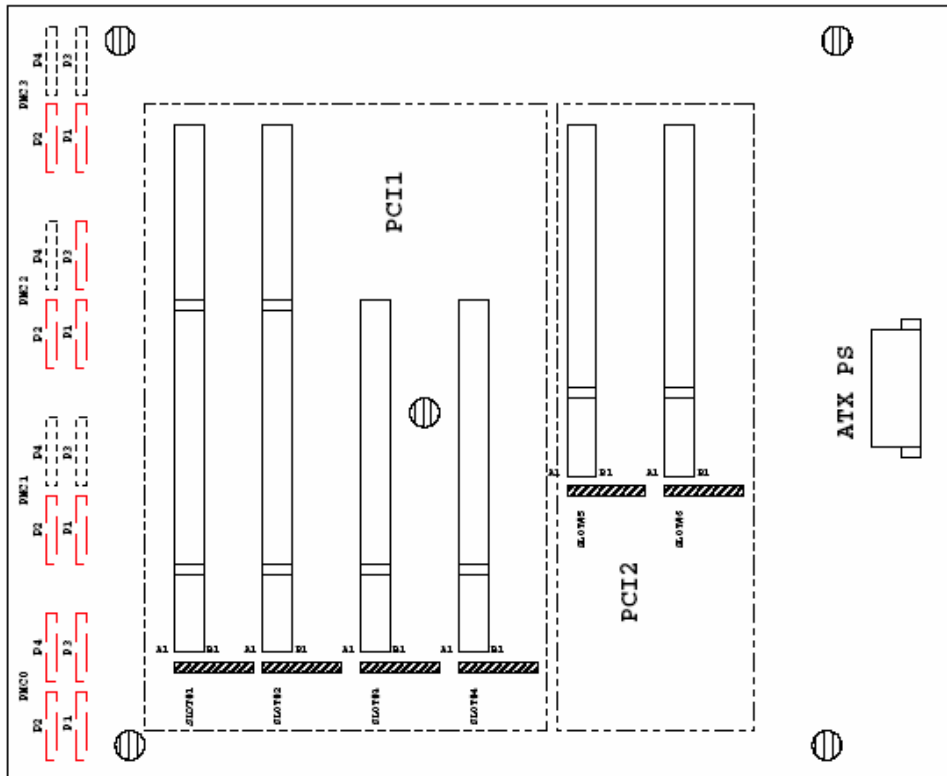

LEGEND :


1. - Assembled
2. - Not populated
3. - Slot for PCI card bracket
4. - Board feet



3. Power supply

To secure fail-safe interconnection between **PQ-MDS-PIB** and PCI Add-in card/cards inserted into the **PQ-MDS-PCIEXP** slots PCI interface buffers placed on **PQ-MDS-PIB** board should be 3-stated until signal Power-OK from ATX PS (OK) received. In its turn this signal produced by ATX PS after ATX PS_ON- signal from **PQ-MDS-PIB** board (OK) received, and all voltages supplied by PS are stable. To summarize this explanation power sequence timing-diagram represented in the Figure 2.

Figure 2

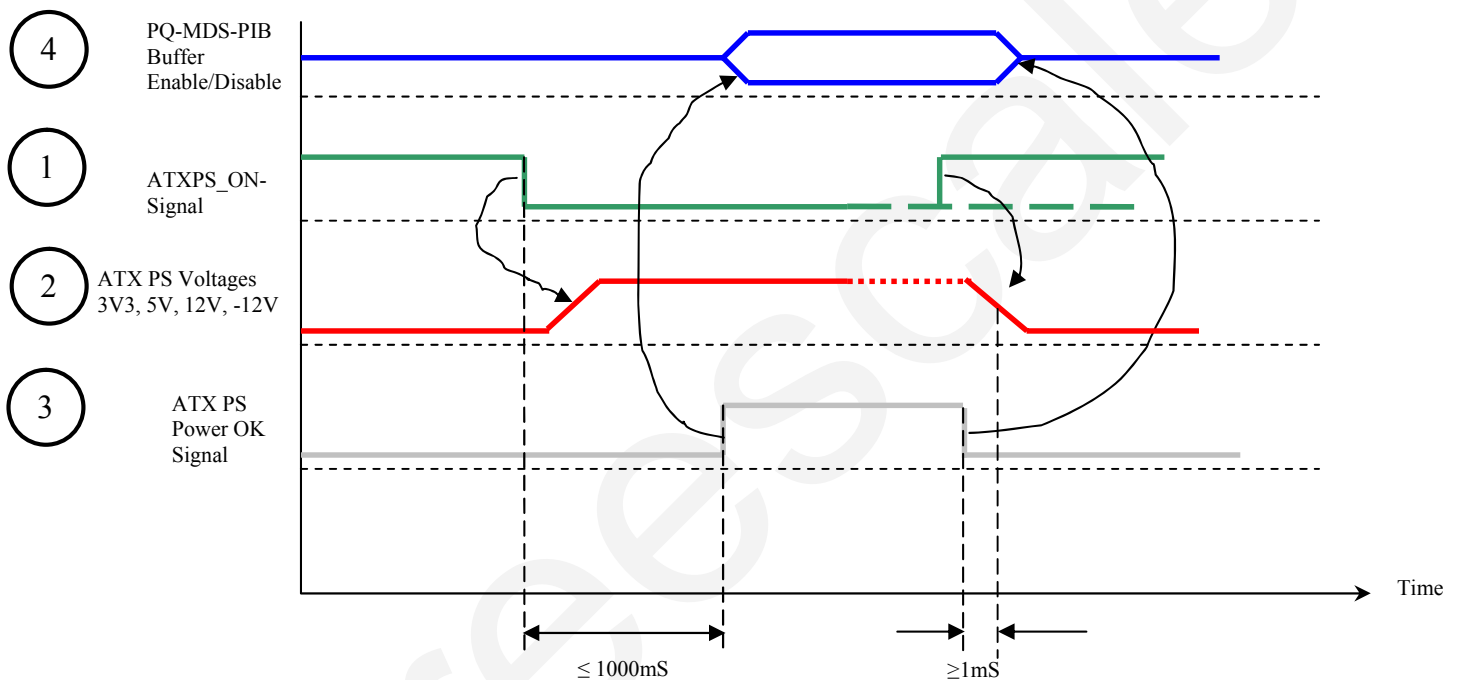

To simplify integration procedure there is the service jumper populated in the **PQ-MDS-PCIEXP**, which provide manual ATX PS_ON signal to the PS or remote one from **PQ-MDS-PIB** board as it's explained above (short J1 pins 1-2 or 2-3 correspondingly). Usage of external ATX PS to supply inserted PCI cards provide capability to use up to 6 add-in cards without any power consumption restriction.

Two LED's are populated on the board to indicate:

- ATX-PS connection (PS-RDY) and
- Normal operation (PWR-ON)

J1 default – short 1-2 pins (Manual ATX PS Control)



4. Data interface

PQ-MDS-PCIEXP supports 6 PCI slots ensuring following buses:

- PCI1 64bit – 2slots (#1,2)
- PCI1 32bit – 4slots (#1...4)
- PCI2 32bit – 2slots (#5,6)

5. Compatibility

PQ-MDS-PCIEXP supports both 3V3 and 5V0 PCI Add-in cards

6. Identification

PCI slots allocated on the **PQ-MDS-PCIEXP** are use corresponding IDSEL signals connected each one to the AD bus as shows in the Table 1

Table 1

Slot#	IDSEL signal connected to	Note
1	PCI1_AD21	
2	PCI1_AD22	
3	PCI1_AD23	
4	PCI1_AD24	
5	PCI2_AD25 (PCI1_AD57)	
6	PCI2_AD26 (PCI1_AD58)	



7. Interrupts

Interrupt signals from all slots are implemented in compliance with PCI standard and represented in the Table 2.

Table 2

Interrupt	Slot #						Note
	1	2	3	4	5	6	
	Pin #						
INTA-	A6	B7	A7	B8	A6	B7	
INTB-	B7	A7	B8	A6	B7	A7	
INTC-	A7	B8	A6	B7	A7	B8	
INTD-	B8	A6	B7	A7	B8	A6	