



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PQ1Nxx3MxSPQ Series

Compact Surface Mount Type
Low Power-Loss Voltage Regulators

■ Features

- 1.Compact surface mount package (4.5×4.3×1.5mm)
- 2.Output current : MAX.350mA
- 3.Power dissipation : MAX.900mW
- 4.Low power-loss
(Dropout voltage : MAX. 0.7V at $I_o=350mA$)
- 5.Built-in reset signal generating function
- 6.Built-in overcurrent, overheat protection functions
- 7.Use of ceramic capacitor is possible as output smooth capacitor
- 8.RoHS directive compliant

■ Applications

- 1.Optical disk drive
- 2.DVD player

■ Absolute Maximum Ratings


($T_a=25^\circ C$)

Parameter	Symbol	Rating	Unit
*1 Input voltage	V_{IN}	9	V
*1 Reset output voltage	V_r	9	V
Output current	I_o	350	mA
*1 Reset output current	I_r	5	mA
*2 Power dissipation	P_D	900	mW
*3 Junction temperature	T_j	150	$^\circ C$
Operating temperature	T_{opr}	-30 to +85	$^\circ C$
Storage temperature	T_{stg}	-55 to +150	$^\circ C$
Soldering temperature	T_{sol}	270(10s)	$^\circ C$

*1 All are open except GND and applicable terminals.
*2 At surface-mounted condition
*3 Overheat protection may operate at $T_j:125^\circ C$ to $150^\circ C$

■ Outline Dimensions

(Unit : mm)

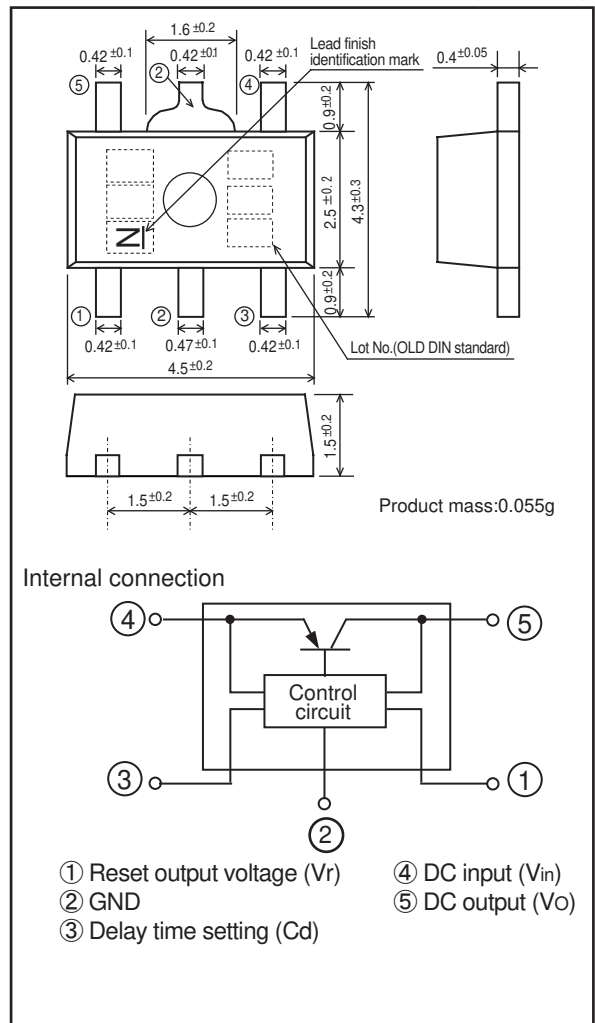

Lead finish:Lead-free solder plating
(Composition: Sn2Bi)

Notice The content of data sheet is subject to change without prior notice.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that may occur in equipment using any SHARP devices shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device.

Electrical Characteristics

(Unless otherwise specified, $V_{in}=5V$, $I_o=30mA$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output voltage	PQ1N253MxSPQ	-	2.440	2.50	2.560	V
	PQ1N333MxSPQ		3.234	3.30	3.366	
Load regulation	RegL	$I_o=5mA$ to $350mA$	-	60	160	mV
Line regulation	Regl	$V_{in}=5$ to $9V$	-	5.0	20	mV
Temperature coefficient of output voltage	TcVo	$I_o=10mA$, $T_j=-25$ to $+75^\circ C$	-	0.1	-	mV/ $^\circ C$
Ripple rejection	RR	Refer to Fig.2	-	55	-	dB
Output noise voltage	$V_{no(rms)}$	$10Hz < f < 100kHz$, $I_o=30mA$	-	60	-	μV
Dropout voltage	V_{i-o}	$I_o=350mA$ *4	-	0.45	0.7	V
Quiescent current	I_q	$I_o=0mA$	-	1.0	2	mA
Input detecting voltage	V_{ri}	$I_o=5mA$, $V_r < 0.8V$, $R_r=10k\Omega$	Refer to list.1			V
Hysteresis voltage	ΔV_{ri}	$I_o=5mA$, $R_r=10k\Omega$	-	$V_{ri} \times 0.05$	-	V
Low reset output voltage	V_{rl}	$I_r=5mA$, $3V < V_{in} < V_{ri}$	-	-	0.8	V
Reset output leak current	I_{rlk}	$V_r=5V$, $R_r=10k\Omega$	-	-	5	μA
*5 Reset output delay time	T_d	$V_{in}=0 \rightarrow 5V$, $V_r \geq 0.8V$, $C_d=0.47\mu F$	50	100	150	ms

*4 Input voltage when output voltage falls 0.1V from that at $V_{in}=5V$

*5 Reset output delay time(TYP.) is obtained by the following equation
 $t_d(TYP.)=100 \times C_d(\mu F) \times 0.47$ (ms)

List.1 Input detecting voltage

($V_{in}=V_o(TYP.)+1.0V$, $V_c=1.8V$, $I_o=30mA$, $T_a=25^\circ C$)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input detecting voltage	PQ1N253MASPQ	-	4.116	4.2	4.284	V
	PQ1N253MCSPQ		3.724	3.8	3.876	
	PQ1N333MASPQ		4.116	4.2	4.284	
	PQ1N333MCSPQ		3.724	3.8	3.876	

Fig.1 Standard measuring circuit of Regulator portion



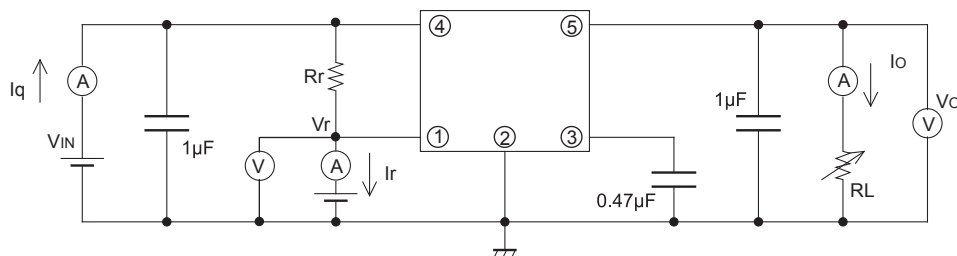


Fig.2 Standard measuring circuit of critical rate of ripple rejection

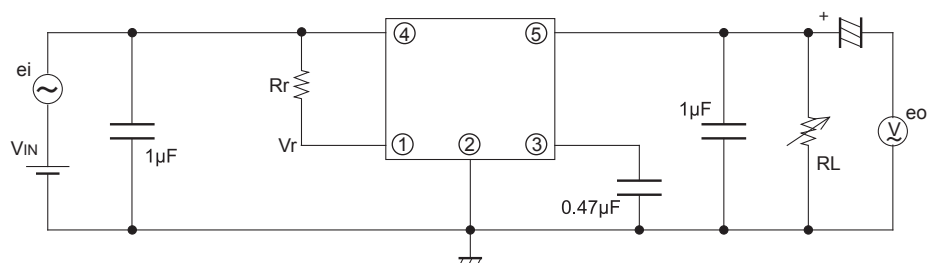


$f=400$ Hz(sine wave)
 $e_i(rms)=100$ mV
 $V_{in}=5.0V$
 $R_r=10k\Omega$
 $I_o=30mA$
 $RR=20\log(e_i(rms)/e_o(rms))$

Fig.3 Power Dissipation vs. Ambient Temperature

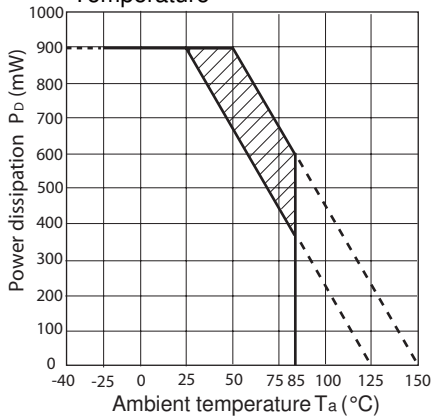

Note) Oblique line portion: Overheat protection may operate in this area.

Mounting PCB

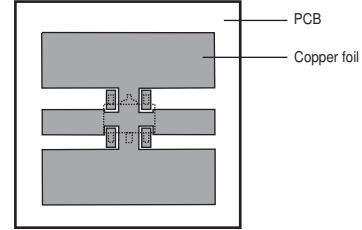

Material : Glass-cloth epoxy resin
 PCB Size : 20mm × 20mm × 1.0mm
 Copper foil area : 180mm²
 Thickness of copper : 35μm

Fig.4 Overcurrent Protection Characteristics

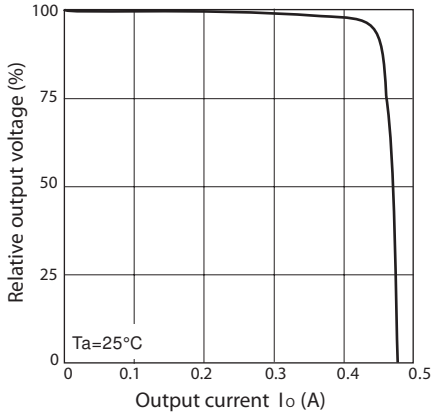


Fig.5 Output Voltage vs. Input Voltage (PQ1N333MASPQ)

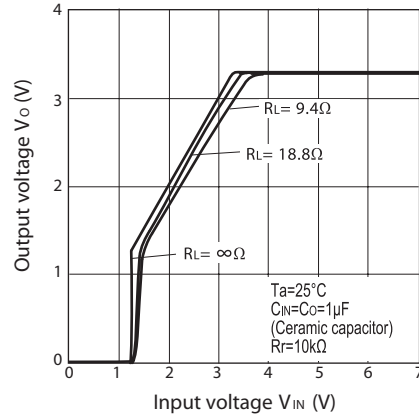


Fig.6 Circuit Operating Current vs. Input Voltage (PQ1N333MASPQ)

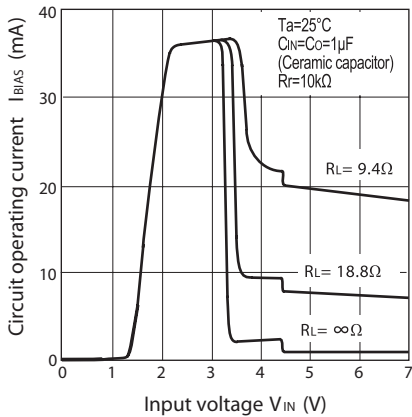


Fig.7 Quiescent Current vs. Junction Temperature

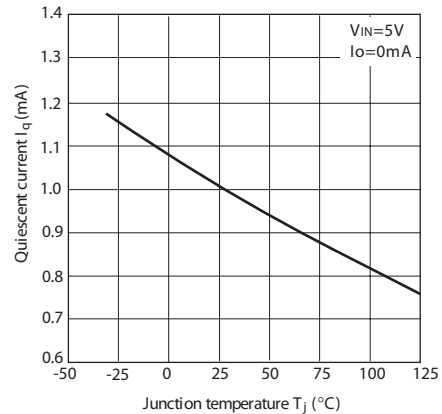


Fig.8 Dropout Voltage vs. Junction Temperature (PQ1N333MASPQ)

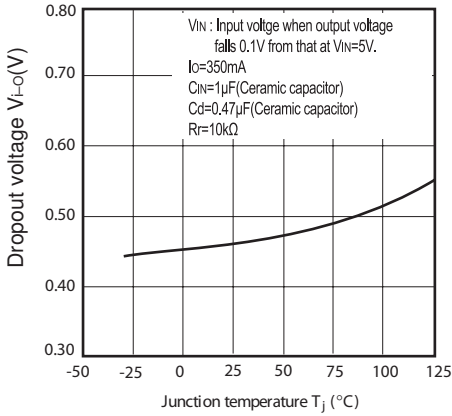


Fig.9 Reference Voltage Deviation vs. Junction Temperature (PQ1N333MASPQ)

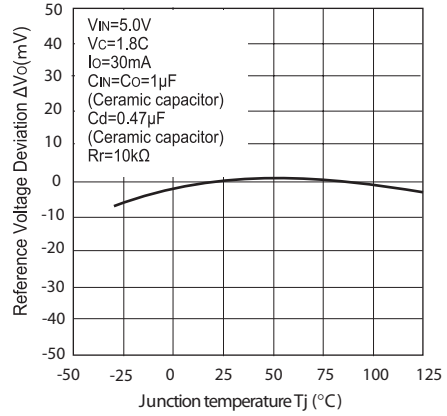


Fig.10 Dropout Voltage vs. Output Current

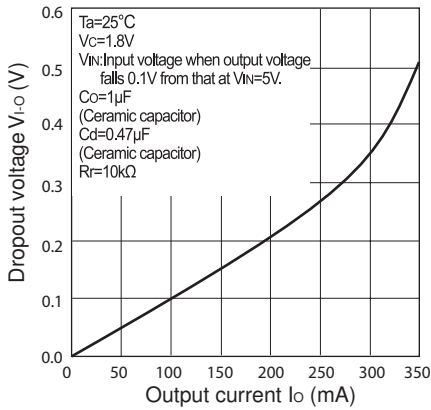


Fig.11 Reset Output Voltage vs. Input Voltage

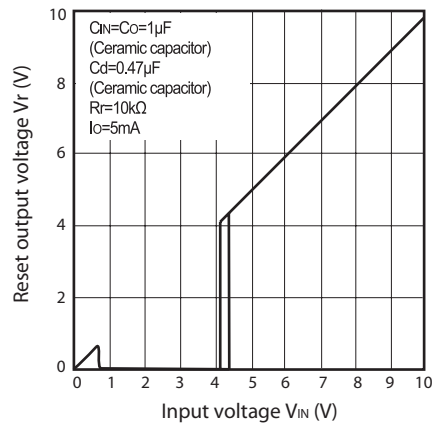


Fig.12 Input Detecting Voltage vs. Junction Temperature

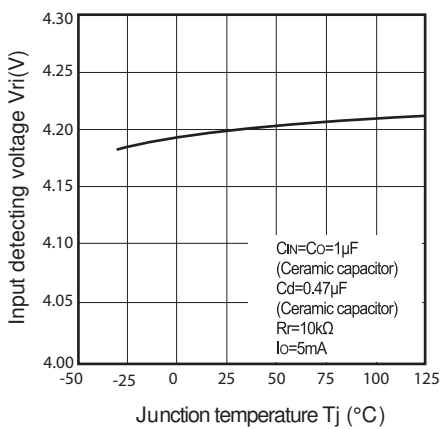


Fig.13 Hysteresis Voltage vs. Junction Temperature

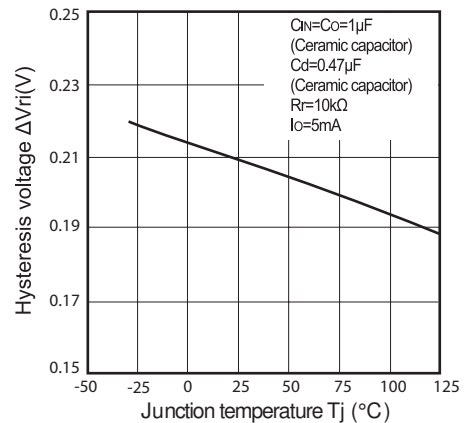


Fig.14 Ripple Rejection vs. Input Ripple Frequency (PQ1N333MASPQ)

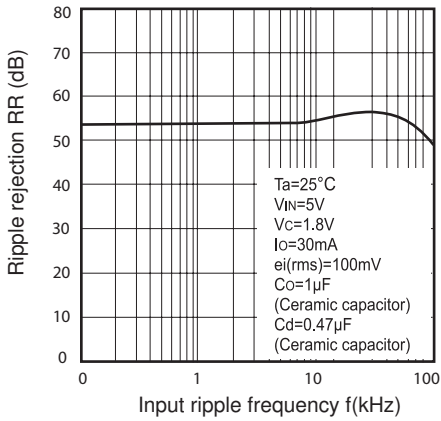


Fig.15 Reset Output Delay Time vs. Delay Time Setting

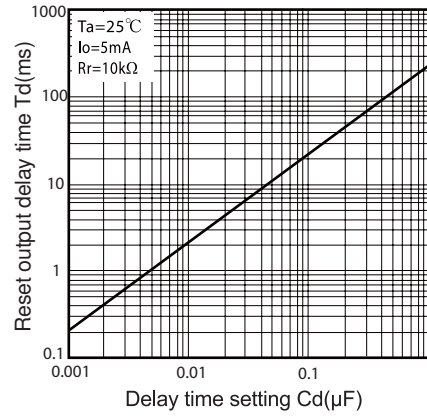


Fig.16 Output Peak Current vs. Junction Temperature

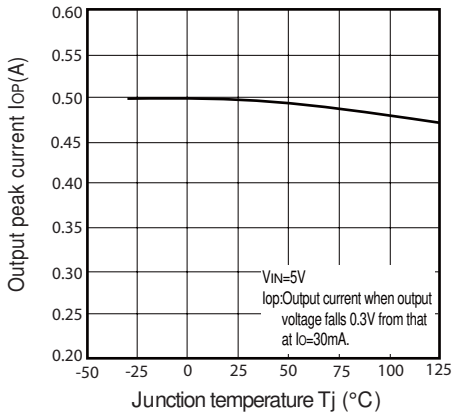


Fig.17 Example of application

