imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




	REVISION								
REV.	DESCRIPTION	DATE	APPROVED						








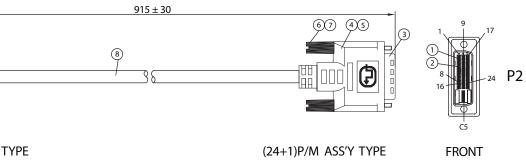

P1 P2 PIN OUT

P1

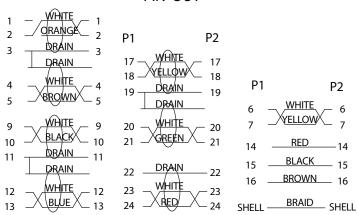

NOTES:

1. CABLE: UL20276

28AWGx1P+DW+FOIL)x7+28AWGx3C+28AWGx1P+MYLAR+FOIL+BD COLOR: BEIGE, OD: 8.5 ± 0.3mm PRINTING: E166307 **N** AWM 20276 28AWG 80°C VW-1 LOW VOLTAGE COMPUTER CABLE

- 2. CONNECTORS: DVI(24+1)P/M TO DVI(24+1)P/M
- 3. HOOD: ASS'Y TYPE, COLOR: BEIGE
- 4. ELECTRICAL TEST:

<1>.100% OPEN SHORT & MISS WIRE TEST

- <2>.INSULATION RESISTANCE: DC400V 10M ohm MIN.
- <3>.CONDUCTOR RESISTANCE: 3 ohm MAX.
- 5. PACKING: 1PC/POLYBAG

No.	PARTS NAME		SPECIFICATION STANDARD			QTY	REMARKS	
1	DVI (24+1)P/M - CONTACT		BRASS / GOLD PLATED SOLDER TYPE			50		
2	DVI (24+1)P/M - INSULATOR			THERMOPLASTIC / BLACK UL94V-0			2	
3	DVI (24+1)P/M - SHELL			NICKEL PLATED			2	
4	CAN			STEEL TIN PLATED			2	
5	5 DVI (24+1)P/M - COVER			45P PVC/BEIGE(BK#01)			2	
6 THUMB SCREW				#4-40 2.8x44mm, NICKEL PLATED			4	
⑦ SCREW - MOLD				35P PVC / COLOR: BLACK			4	
8 CABLE DVI 24+1 UL 20276			20276	KL 3007ABK01A			1	
9	MINI TIE			PE/BLACK			2	
10	POLYBAG 0.08x180x200				1			
Dim range (mm)		Tolerance +/-		Part Number: 1321008-03				р.
		(mm)	Part I					
0-1		0.15	Desci					N 4
1-6		0.20		DVI (24+1)P/M - DVI (24+1)P/I				
6	5-18	0.30						
1	8-50	0.50						
50-120		0.70	Dra	awn / Date	Checked / Date	Ap	Approved	
120-250 250-500		0.90		3. Grubb	12-20-06		JJH / 12-20	
		1.20	1	2-20-06	12 20 00			