



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**SERIES:** PSF-75 | **DESCRIPTION:** AC-DC POWER SUPPLY

**FEATURES**


- up to 75 W continuous power
- universal input (90~264 Vac)
- built-in constant current limit circuitry
- alarm signal for AC OK and battery low
- short circuit, over load, over voltage, brown-out, battery low, and battery polarity protections
- withstand 2G vibration test
- efficiency up to 88%

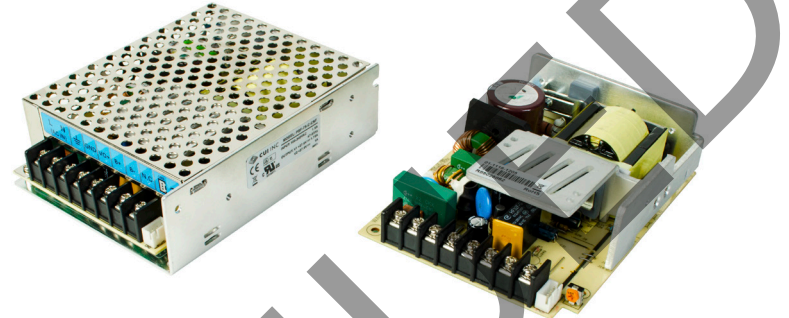

| MODEL    |     | output voltage | output current <sup>1</sup> | output power <sup>2</sup> | ripple and noise <sup>3</sup> | efficiency |
|----------|-----|----------------|-----------------------------|---------------------------|-------------------------------|------------|
|          |     | (Vdc)          | max (A)                     | max (W)                   | max (mVp-p)                   | typ (%)    |
| PSF-75-A | Vo1 | 13.8           | 5.5                         | 75                        | 100                           | 86         |
|          | Vo2 | 13.8           | 2.07                        |                           | 150                           |            |
| PSF-75-B | Vo1 | 13.8           | 4.4                         | 75                        | 100                           | 85         |
|          | Vo2 | 13.8           | 2.07                        |                           | 150                           |            |
|          | Vo3 | 5              | 3                           |                           | 100                           |            |
| PSF-75-C | Vo1 | 27.6           | 2.75                        | 75                        | 100                           | 88         |
|          | Vo2 | 27.6           | 1.15                        |                           | 150                           |            |
| PSF-75-D | Vo1 | 27.6           | 2.2                         | 75                        | 100                           | 87         |
|          | Vo2 | 27.6           | 1.15                        |                           | 150                           |            |
|          | Vo3 | 5              | 3                           |                           | 100                           |            |

Notes: 1. Vo2 battery discharge current must not exceed 50% of the rated power.  
 2. Maximum total combined power (rated power).  
 3. At 20 MHz bandwidth using a 12" twisted pair-wire, each output terminated with a 47 µF and 0.1 µF parallel capacitors.

**PART NUMBER KEY**

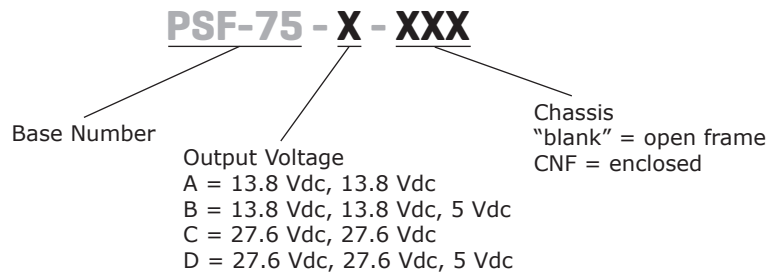

**INPUT**

| parameter       | conditions/description   | min | typ | max | units |
|-----------------|--------------------------|-----|-----|-----|-------|
| voltage         |                          | 90  |     | 264 | Vac   |
|                 |                          | 127 |     | 373 | Vdc   |
| surge voltage   | for maximum of 5 seconds |     |     | 300 | Vac   |
| frequency       |                          | 47  |     | 63  | Hz    |
| current         | at 115 Vac               |     | 1.5 |     | A     |
|                 | at 230 Vac               |     | 1.0 |     | A     |
| inrush current  | at 115 Vac, cold start   |     | 35  |     | A     |
|                 | at 230 Vac, cold start   |     | 70  |     | A     |
| leakage current | at 264 Vac               |     |     | 1   | mA    |

**OUTPUT**

| parameter               | conditions/description                           | min | typ   | max | units |
|-------------------------|--|-----|---|-----|-------|
| line regulation         | low line to high line, at rated load<br>Vo1, Vo3 |     | ±0.5  |     | %     |
| load regulation         | 10% to 100% rated load<br>Vo1                    |     | ±0.5  |     | %     |
|                         | Vo3  |     | ±1.5  |     | %     |
| voltage accuracy        | Vo1  |     | ±2  |     | %     |
|                         | Vo3  |     | ±3  |     | %     |
| hold-up time            | at 115 Vac, full load                            |     | 8   |     | ms    |
|                         | at 230 Vac, full load                            |     | 50  |     | ms    |
| setup time              | at 115/230 Vac, full load, cold start            | 800 |   |     | ms    |
| rise time               | at 115/230 Vac, full load                        |     | 30  |     | ms    |
| adjustability           | Vo1  |     | ±10   |     | %     |
| temperature coefficient | Vo1, 0°C~50°C                                    |     | ±0.03   |     | %/°C  |
| AC OK                   | PSF-75-A, PSF-75-C<br>PSF-75-B, PSF-75-D         |     | TTL open collector output<br>relay contact output |     |       |
| battery low             | PSF-75-A, PSF-75-B                               |     | <12 V ±3%   |     |       |
|                         | PSF-75-C, PSF-75-D                               |     | <22 V ±3%   |     |       |

**PROTECTIONS**

| parameter               | conditions/description     | min | typ | max  | units |
|-------------------------|----------------------------|-----|-----|------|-------|
| over voltage protection | Vo1, latch off mode        | 115 |     | 150  | %     |
| over current protection | auto recovery, hiccup mode |     |     |      |       |
|                         | Vo1, Vo3                   | 110 |     |      | %     |
|                         | Vo2                        | 100 |     |      | %     |
| battery cut off         | PSF-75-A, PSF-75-B         | 9.5 | 10  | 10.5 | Vdc   |
|                         | PSF-75-C, PSF-75-D         | 19  | 20  | 21   | Vdc   |

**SAFETY & COMPLIANCE**

| parameter            | conditions/description   | min     | typ | max | units |
|----------------------|--|---------|-----|-----|-------|
| isolation voltage    | input to output  | 3,000   |     |     | Vac   |
|                      | input to ground  | 1,500   |     |     | Vac   |
|                      | output to ground   | 500     |     |     | Vac   |
| isolation resistance | input to output at 500 Vdc   | 100     |     |     | MΩ    |
| safety approvals     | UL 60950-1, EN 60950-1   |         |     |     |       |
| EMI/EMC <sup>1</sup> | EN 55022, EN 61000-6-(1,3), EN 61000-3-(2,3),<br>EN 55024, EN 50204, EN 61204-3, EN 61000-4-(2, 3, 4, 5, 6, 8, 11) |         |     |     |       |
| MTBF                 | PSF-75-A, PSF-75-B as per MIL-HDBK-217F  | 125,600 |     |     | hrs   |
|                      | PSF-75-C, PSF-75-D as per MIL-HDBK-217F  | 105,200 |     |     | hrs   |
| RoHS                 | 2011/65/EU   |         |     |     |       |


Note: 1. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

## ENVIRONMENTAL


| parameter             | conditions/description   | min | typ | max | units |
|-----------------------|--|-----|-----|-----|-------|
| operating temperature | see derating curve   | -20 |     | 70  | °C    |
| storage temperature   |  | -40 |     | 85  | °C    |
| operating humidity    | non-condensing   | 20  |     | 90  | %     |
| storage humidity      | non-condensing   | 10  |     | 90  | %     |
| vibration             | at 10~500 Hz, 10 min per cycle for 60 minutes each test along the X, Y, and Z axis |     | 2   |     | G     |

## DERATING CURVES

Load vs. Temperature

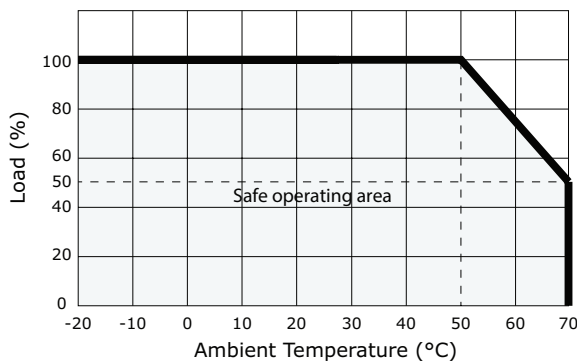

Load vs. Input Voltage (at 25°C)

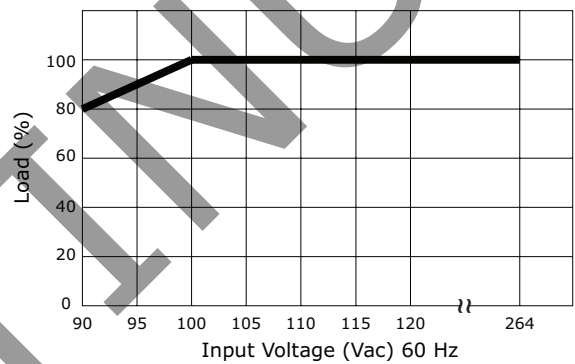

## MECHANICAL


| parameter  | conditions/description        | min | typ  | max | units |
|------------|-------------------------------|-----|------|-----|-------|
| dimensions | open frame: 123 x 95 x 31     |     |      |     | mm    |
|            | enclosed: 129.5 x 97.5 x 37.5 |     |      |     | mm    |
| weight     | open frame                    |     | 0.33 |     | kg    |
|            | enclosed                      |     | 0.46 |     | kg    |

## MECHANICAL DRAWING

### OPEN FRAME

units: mm



| CN1 Pin Connections |              | CN2 Pin Connections             |  |
|---------------------|--------------|---------------------------------|--|
| PIN                 | Function     | PIN                             | Function   |
| 1                   | AC/L         | PSF-75-A, PSF-75-C <sup>3</sup> |  |
| 2                   | AC/N         | 1                               | AC OK  |
| 3                   | FG $\perp$   | 2                               | BAT LOW  |
| 4                   | -Vo1         | 3                               | PSF-75-A: (13.8 V/20 mA)<br>PSF-75-C: (27.6 V/20 mA) |
| 5                   | +Vo1         | PSF-75-B, PSF-75-D <sup>4</sup> |  |
| 6                   | +Vo2 (+ BAT) | 1 2                             | AC OK  |
| 7 <sup>1</sup>      | -Vo2 (- BAT) | 3 4                             | BAT LOW  |
| 8 <sup>2</sup>      | +Vo3 (+5 V)  |                                 |  |

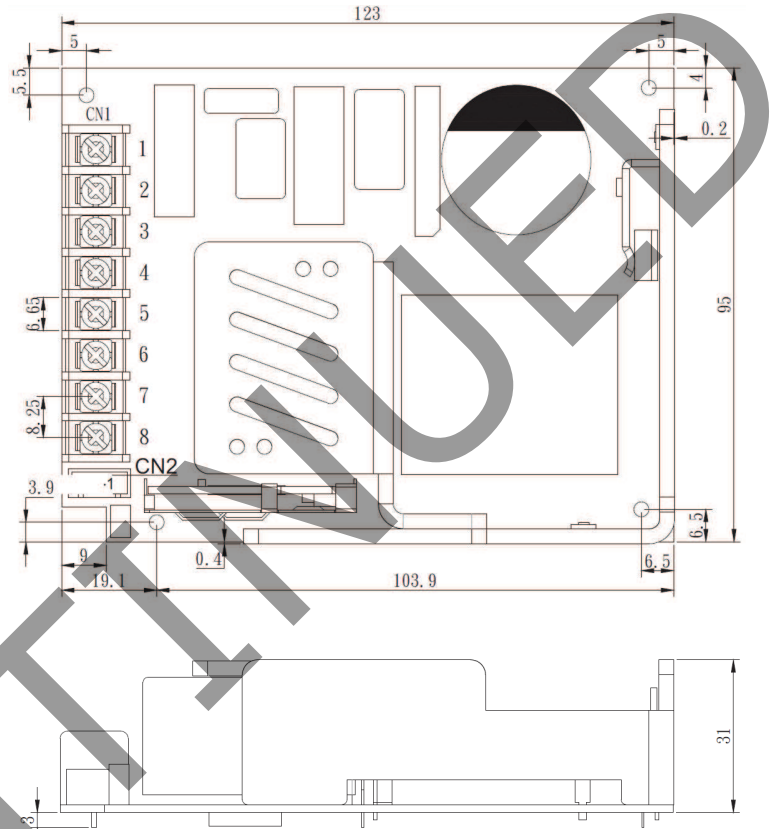

### CNF

units: mm


| CN1 Pin Connections |              | CN2 Pin Connections             |  |
|---------------------|--------------|---------------------------------|--|
| PIN                 | Function     | PIN                             | Function   |
| 1                   | AC/L         | PSF-75-A, PSF-75-C <sup>3</sup> |  |
| 2                   | AC/N         | 1                               | AC OK  |
| 3                   | FG $\perp$   | 2                               | BAT LOW  |
| 4                   | -Vo1         | 3                               | PSF-75-A: (13.8 V/20 mA)<br>PSF-75-C: (27.6 V/20 mA) |
| 5                   | +Vo1         | PSF-75-B, PSF-75-D <sup>4</sup> |  |
| 6                   | +Vo2 (+ BAT) | 1 2                             | AC OK  |
| 7 <sup>1</sup>      | -Vo2 (- BAT) | 3 4                             | BAT LOW  |
| 8 <sup>2</sup>      | +Vo3 (+5 V)  |                                 |  |

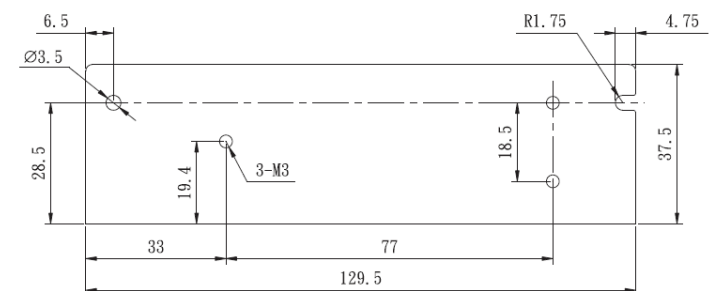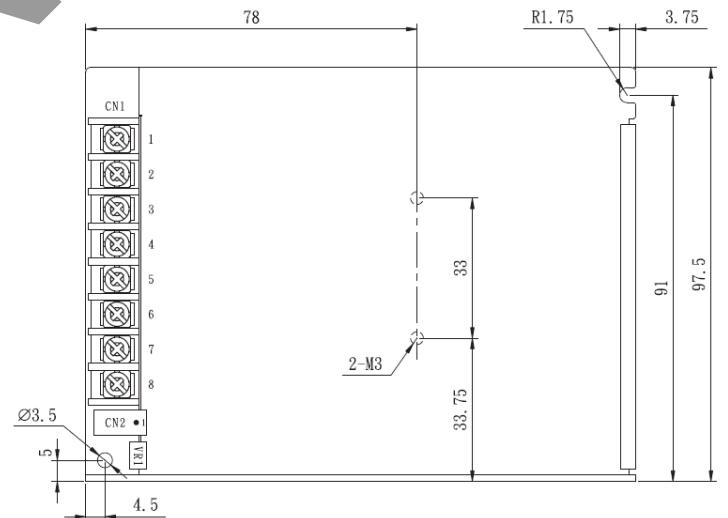

- Notes:
1. To protect product damage do not connect the GND port with -BAT port.
  2. PSF-75-B and PSF-75-D only.
  3. For PSF-75-A & PSF-75-C, CN2 mates with JST XHP-3 or equivalent and JST SXH-001 T-P0.6 or equivalent.
  4. For PSF-75-B & PSF-75-D, CN2 mates with JST XHP-4 or equivalent and JST SXH-001 T-P0.6 or equivalent.

## BATTERY CHARGING SPECIFICATIONS

### Block Diagram

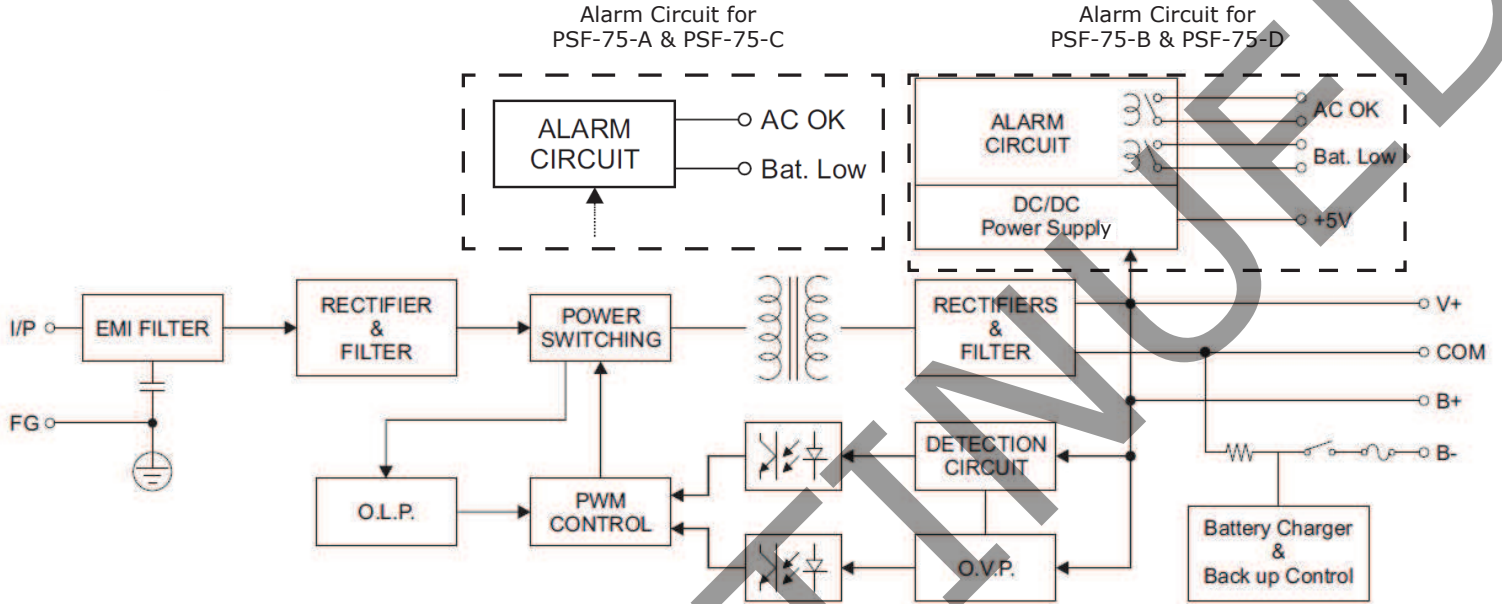


### PSF-75-A & PSF-75-C

#### Alarm Signal for AC OK and Battery Low

| Function    | Description  | Alarm Output                           |
|-------------|--|--|
| AC OK       | The signal is low when the power supply turns on   | Low<br>(0.3 V max. at 30 mA)           |
|             | The signal is high when the power supply turns off   | High/open<br>(external voltage < 50 V) |
| Battery Low | The signal is low when the voltage of the battery is below:<br>12 V (PSF-75-A), 22 V (PSF-75-C)  | Low<br>(0.3 V max. at 30 mA)           |
|             | The signal is high when the voltage of the battery is above:<br>12 V (PSF-75-A), 22 V (PSF-75-C) | High/open<br>(external voltage < 50 V) |

- Notes:
1. Alarm signal is sent out through "AC OK" and "Battery Low" pins.
  2. An external voltage source is required for this function. The maximum applied voltage is 50 V and the maximum sink current is 30 mA.

#### Internal Circuit of AC OK and Battery Low

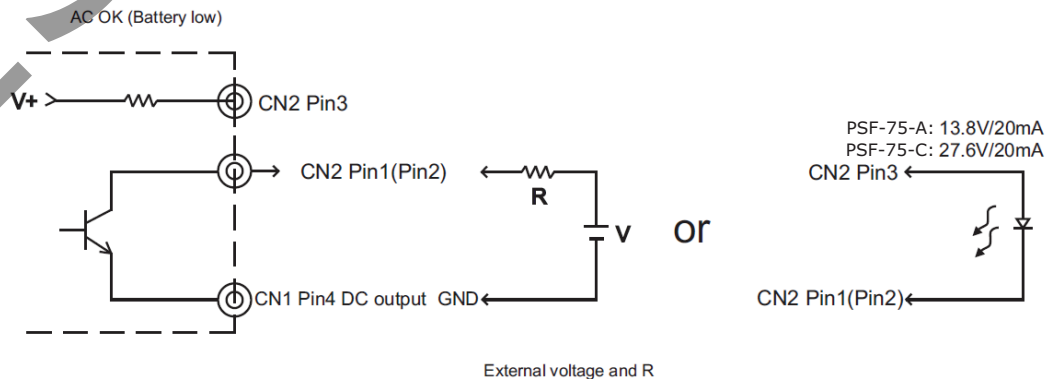

## BATTERY CHARGING SPECIFICATIONS (CONTINUED)


### PSF-75-B & PSF-75-D

Alarm Signal for AC OK and Battery Low

| Function    | Description  | Alarm Output                           |
|-------------|--|--|
| AC OK       | The signal is low when the power supply turns on   | Low or short                           |
|             | The signal is high when the power supply turns off   | High/open<br>(external voltage < 30 V) |
| Battery Low | The signal is low when the voltage of the battery is below:<br>12 V (PSF-75-B), 22 V (PSF-75-D)  | Low or short                           |
|             | The signal is high when the voltage of the battery is above:<br>12 V (PSF-75-B), 22 V (PSF-75-D) | High/open<br>(external voltage < 30 V) |

- Notes:
1. Alarm signal is sent out through "AC OK" and "Battery Low" pins (relay contact type).
  2. An external voltage source is required for this function. The maximum applied voltage is 30 V and the maximum sink current is 1 A.

Internal Circuit of AC OK and Battery Low

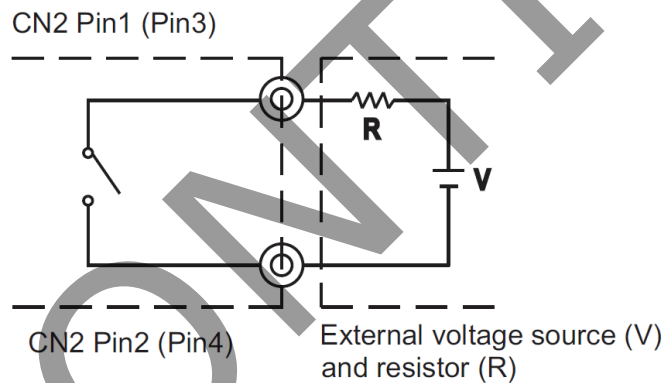

## REVISION HISTORY

| rev. | description       | date       |
|------|-------------------|------------|
| 1.0  | initial release   | 11/25/2013 |
| 1.01 | updated datasheet | 12/12/2014 |

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.