

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







						_
PART NUMBER	ITEM ① BODY	ITEM ② CONTACT	ITEM ③ INSULATOR	ITEM ④ NUT	ITEM S WASHER	
133-3701-401		BERYLLIUM COPPER GOLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRASS GOLD PL .00DD1 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	PHOSPHOR BRONZE GOLD PL .DDDQ1 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	
133-3701-406	BRASS NICKEL PL .DDQ1 MIN OVER COPPER PL .00005 MIN	BERYLLIUM COPPER COLD PL .00003 MIN OVER NICKEL PL .00005 MIN OVER COPPER PL .00005 MIN	TEFLON	BRASS NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	PHOSPHOR BRONZE NICKEL PL .0001 MIN OVER COPPER PL .00005 MIN	

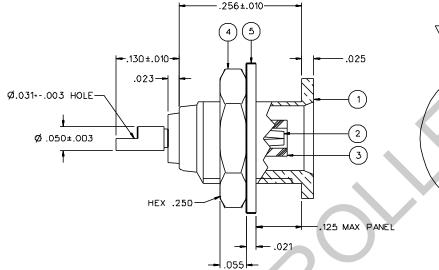

Ø.312 ±.005 -Ø.250 ±.003 -.214 ±.003 -

NOTES:

1. SPECIFICATIONS:

IMPEDANCE: 50 OHMS
FREQUENCY RANGE: D-6 GHz
VSWR: NOT APPLICABLE
WORKING VOLTACE: 335 VRMS MAX AT SEA LEVEL
DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS MN AT SEA LEVEL
INSULATION RESISTANCE: 10000 MEGOHM MIN OUTER CONDUCTOR - GOLD PLATED INITIAL 5 MILLIOHM MAX, AFTER CENTER GONTACT - INITIAL 5 MILLIOHM MAX, AFTER CONTACT - GOLD PLATED INITIAL 1 MILLIOHM MAX OUTER CONDUCTOR - GOLD PLATED INITIAL 1 MILLIOHM MAX, AFTER ENVIRONMENTAL 1.5 MILLIOHM MAX NICKEL PLATED INITIAL 2.5 MILLIOHM MAX, AFTER FAVIRONMENTAL 3.5 MILLIOHM MAX

NICKEL PLAILD NITIAL 2.5 MILLIUHM MAX, AFTER ENVIRONMENTAL 3.5 MILLIUHM MAX NOT APPLICABLE CORONA LEVEL: 250 VOLTS MINIMUM AT 70,000 FEET INSERTION LOSS: NOT APPLICABLE RF LEAKAGE: NOT APPLICABLE RF LEAKAGE: NOT APPLICABLE RF HIGH POTENTIAL WITHSTANDING VOLTAGE: 600 VRMS AT 4 AND 7 MHZ


MECHANICAL:

ENGAGE/DISENGAGE FORCE 5.6 LBS MAX ENGAGEMENT 1.0 LB MIN DISENGAGEMENT B.0 LBS MAX DISENGAGEMENT

CONTACT RETENTION FORCE: 2.3 LBS MAX UNSENCA CONTACT RETENTION TORQUE: NOT APPLICABLE COUPLING MECHANISM RETENTION: NOT APPLICABLE CABLE ACCEPTABILITY: NOT APPLICABLE CABLE HEX CRIMP SIZE: NOT APPLICABLE CABLE RETENTION: NOT APPLICABLE CABLE RETENTION: NOT APPLICABLE CABLE RETENTION: NOT APPLICABLE DURABILITY: 500 CYCLES MIN

ENVIRONMENTAL:

(MEETS OR EXCEEDS THE APPLICABLE PARAGRAPH OF MIL-C-39012) THERMAL SHOCK: MIL-STD-202, METHOD 107. CONDITION F OPERATING TEMPERATURE: -85 DEC C TO 185 DEC C CORROSION: MIL-STD-202, METHOD 101, CONDITION B SHOCK: MIL-STD-202, METHOD 213, CONDITION B WIGRATION: MIL-STD-202, METHOD 204, CONDITION B MOISTURE RESISTANCE: MIL-STD-202, METHOD 10B

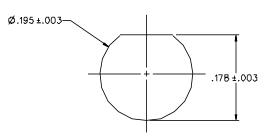

MOUNTING HOLE LAYOUT

CUSTOMER DRAWING

DRAWING NO.

ENGINEERING RELEASE

CHANGED: .021 WAS .020 2o 10-7-97 R 8

26 12-19-00 A R

REVISIONS

8-15-95 R 8 8 8 8 8 8 8-18-95 H C K B H ECN 43616 CHANGED: DIA .031+-.003 WAS DIA .036+-.003 11-29-95 R M I R 12-B-95 H M M M M ECN 43782

CONTACT RETENTION 2.3 LBS MIN WAS 4.0, MAX ENCAGE 5.6 LBS WAS 3.4, DISENGAGE 1.0 / B.D. LBS WAS 5.0 LBS TYPICAL DELETE:
INTERFACE PER CECC 2222D DETAIL

REVISION NUMBER FOLLOWED BY AN ALPHA CHARACTER INDICATES DRAWING CLARIFL. CATION OR PART NUMBER ADDITION ONLY.

ECN 44921

ECN 47537

THIS DRAWING TO BE INTERPRETED PER ANSI Y 14.5M - 1982

"μSTATION"

COMPANY CONFIDENTIAL

	TOLERANCE UNLESS OTHERWISE SPECIFIED		DRAWN BY SWC	DATE 1-17-95		Clinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256	
	DE CIMALS		CHECKED BY SWC APPROVED BY TAK	DATE B-15-95 Date B-15-95	TITLE JACK ASSEMBLY BULKHEAD RECEPTACLE MCX		
			APPROVED BY	DATE	CODE NO.	DRAWING NO.	
	FINISH		RELEASE DATE 8-18-95			<u> </u>	
					SCALE 10:1	U/N INCH SHEET 2 OF 2	