



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Thermally-Enhanced High Power RF LDMOS FETs 350 W, 50 V, 1200 – 1400 MHz


Description

The PTVA123501EC and PTVA123501FC LDMOS FETs are designed for use in power amplifier applications in the 1200 MHz to 1400 MHz frequency band. Features include high gain and thermally-enhanced package with slotted and earless flanges. Manufactured with Infineon's advanced LDMOS process, these devices provide excellent thermal performance and superior reliability.

PTVA123501EC
Package H-36248-2



PTVA123501FC
Package H-37248-2

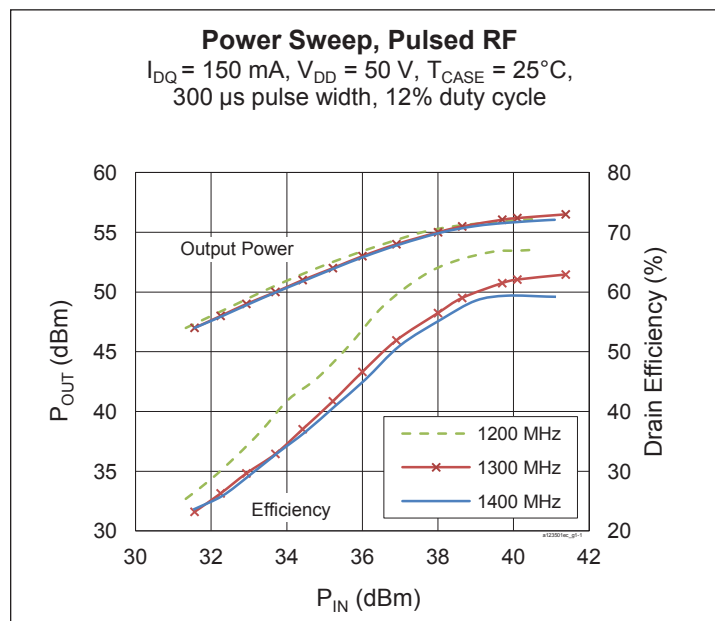

Features

- Broadband internal input and output matching
- High gain and efficiency
- Integrated ESD protection
- Low thermal resistance
- Excellent ruggedness
- Pb-free and RoHS compliant
- Capable of withstanding a 10:1 load mismatch (all phase angles) at 55.5 dBm under pulsed conditions: 300 μs pulse width, 12% duty cycle, $V_{DD} = 50 \text{ V}$

RF Characteristics

Pulsed RF Performance (tested in Infineon test fixture)

$V_{DD} = 50 \text{ V}$, $I_{DQ} = 0.15 \text{ A}$, $P_{OUT} = 350 \text{ W}$, $f_1 = 1200 \text{ MHz}$, $f_2 = 1300 \text{ MHz}$, $f_3 = 1400 \text{ MHz}$, 300 μs pulse width, 12% duty cycle

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	16.5	17	—	dB
Drain Efficiency	η_D	54	55	—	%
Return Loss	IRL	—	-12	-9	dB

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

RF Characteristics

Typical RF Performance (not subject to production test, verified by design/characterization in Infineon test fixture)
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 150\text{ mA}$, Input signal ($t_r = 5\text{ ns}$, $t_f = 6.5\text{ ns}$), $300\text{ }\mu\text{s}$ pulse width, 12% duty cycle, class AB test

Mode of Operation	f (MHz)	IRL (dB)	P _{1dB}			P _{3dB}			Max P _{droop} (pulse) dB @ 350 W	t_r (ns) @ 350 W	t_f (ns) @ 350 W
			Gain (dB)	Eff (%)	P _{OUT} (W)	Gain (dB)	Eff (%)	P _{OUT} (W)			
Pulsed RF	1200	-14	16.2	59	375	14.2	59	415	0.10	4	5<
Pulsed RF	1300	-14	16.0	59	390	14.0	59	435	0.15	4	5<
Pulsed RF	1400	-12	15.8	56	375	13.8	57	415	0.15	4	5<

Typical RF Performance (not subject to production test, verified by design/characterization in Infineon test fixture)
 $V_{DD} = 50\text{ V}$, $I_{DQ} = 150\text{ mA}$, 30 ms pulse width, 30% duty cycle, class AB test

Mode of Operation	f (MHz)	P _{1dB}			P _{3dB}			P _{droop} (pulse) dB @ 300 W
		Gain (dB)	Eff (%)	P _{OUT} (W)	Gain (dB)	Eff (%)	P _{OUT} (W)	
Pulsed RF	1200	16	47	316	14	48	350	0.23
Pulsed RF	1300	16	47	324	14	48	355	0.25
Pulsed RF	1400	15.5	45	315	13.5	47	355	0.29

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	105	—	—	V
Drain Leakage Current	$V_{DS} = 50\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1.0	μA
	$V_{DS} = 105\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10.0	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.1	—	Ω
Operating Gate Voltage	$V_{DS} = 50\text{ V}$, $I_{DQ} = 150\text{ mA}$	V_{GS}	3	3.35	4	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1.0	μA

Maximum Ratings





Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	105	V
Gate-Source Voltage	V_{GS}	-6 to +12	V
Junction Temperature	T_J	200	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 70^{\circ}\text{C}$, 300 W CW)	$R_{\theta JC}$	0.34	$^{\circ}\text{C/W}$

Ordering Information





Type and Version	Order Code	Package Description	Shipping
PTVA123501EC V2	PTVA123501ECV2XWSA1	H-36248-2, bolt-down	Tray
PTVA123501EC V2 R250	PTVA123501ECV2R250XTMA1	H-36248-2, bolt-down	Tape & Reel, 250 pcs
PTVA123501FC V1	PTVA123501FCV1XWSA1	H-37248-2, earless	Tray
PTVA123501FC V1 R250	PTVA123501FCV1R250XTMA1	H-37248-2, earless	Tape & Reel, 250 pcs

See next page for Typical RF Performance





Typical RF Performance (data taken in production test fixture)

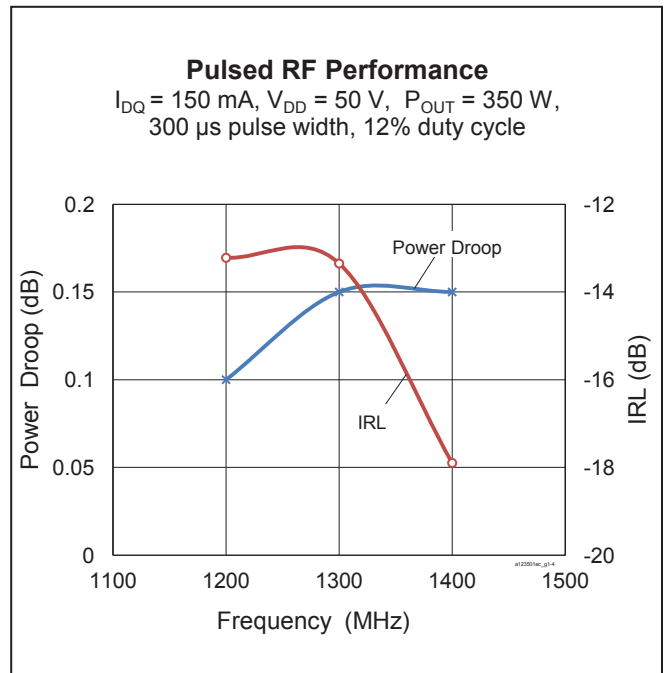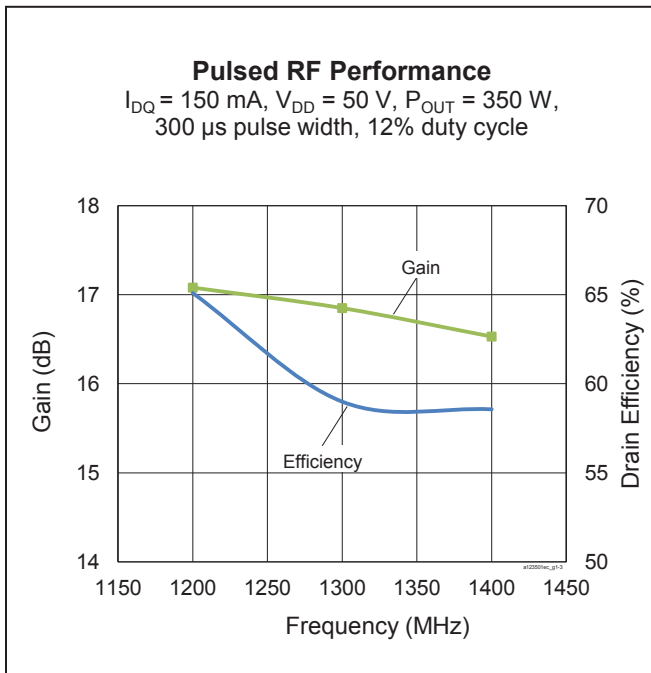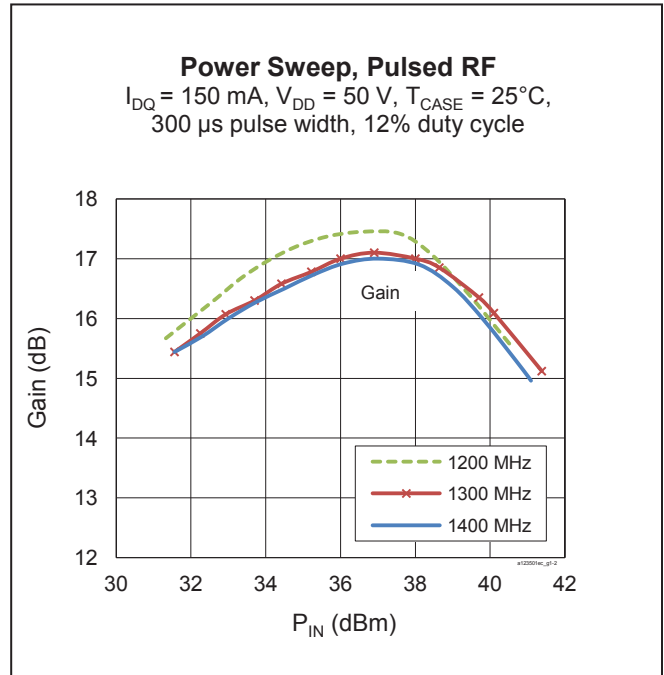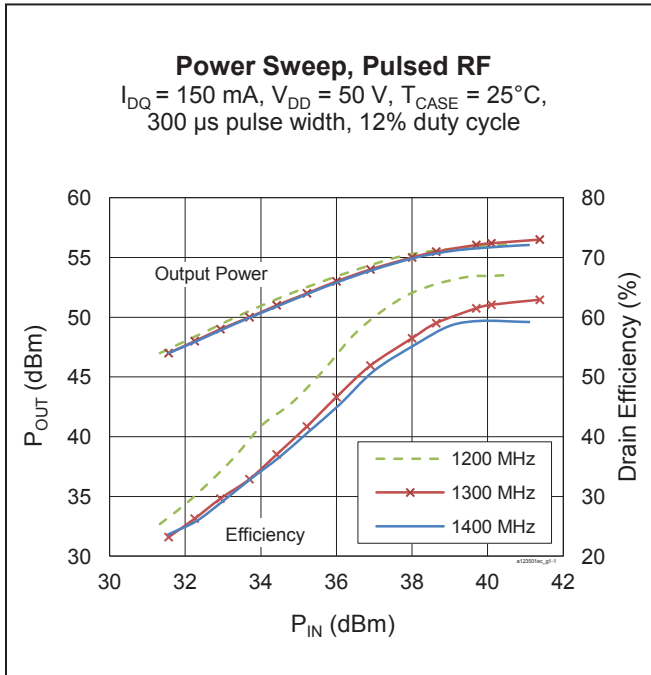





Typical RF Performance (cont.)

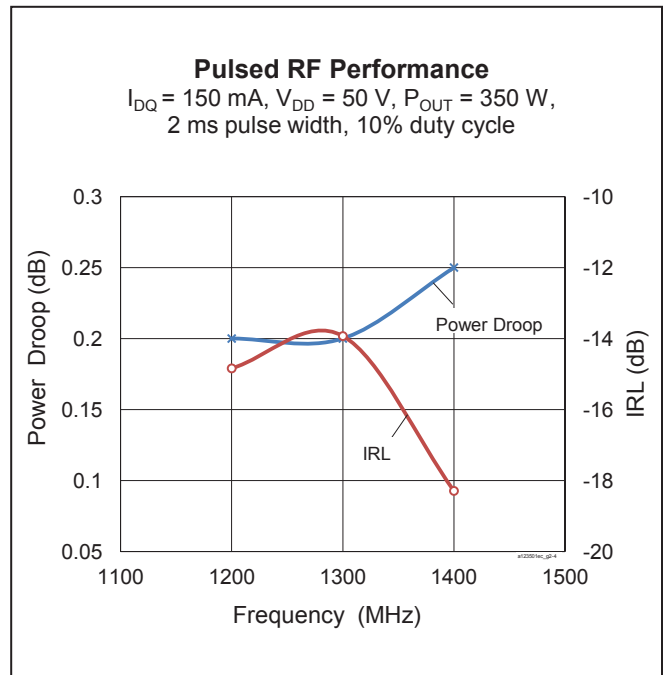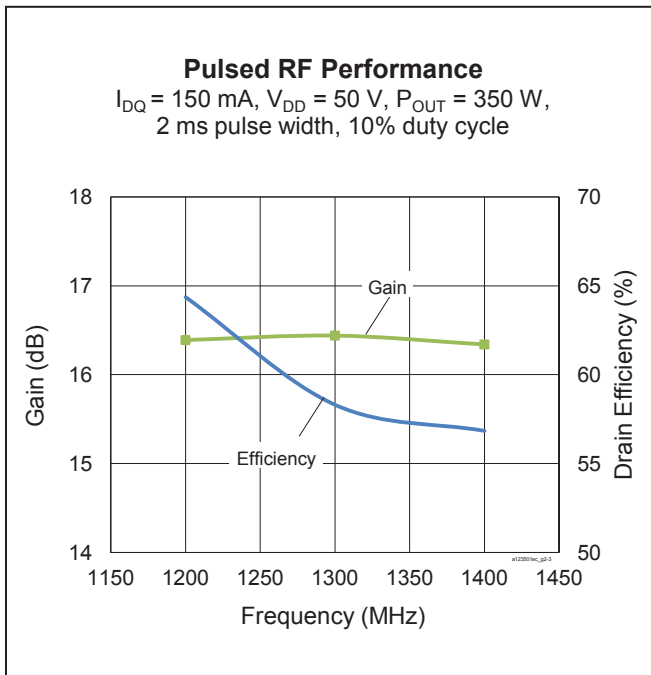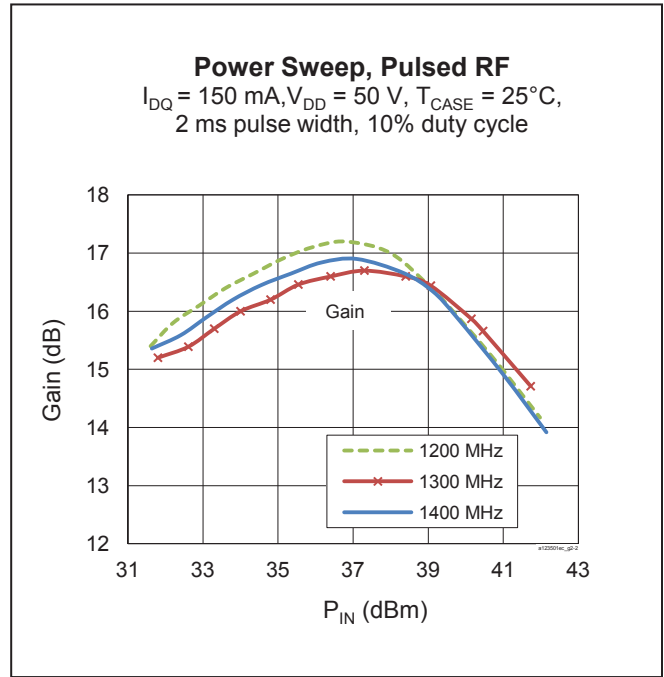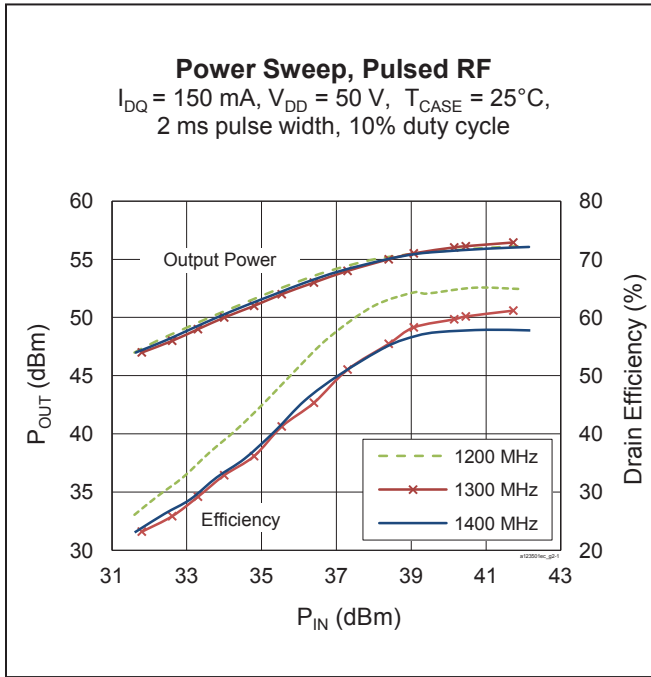

Typical RF Performance (cont.)

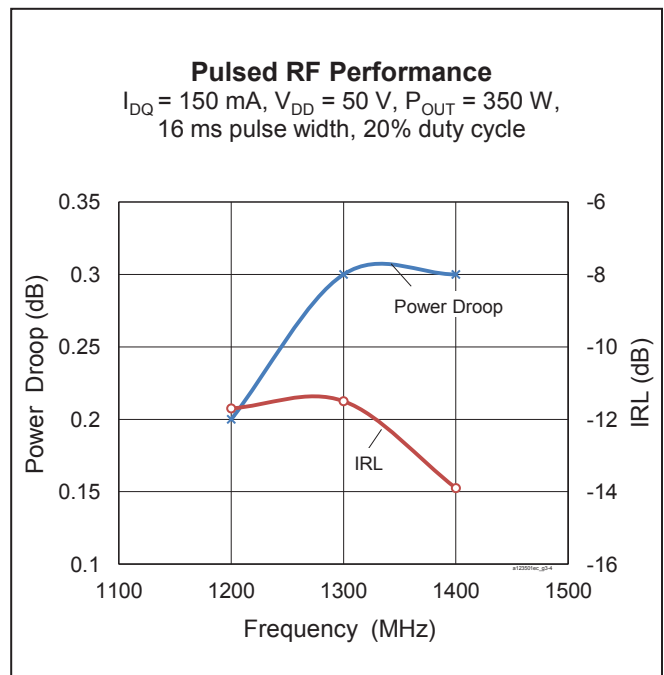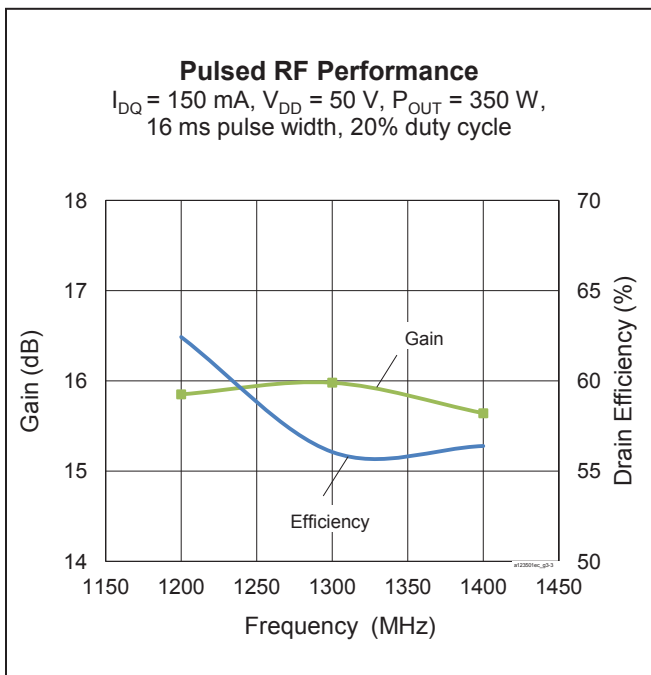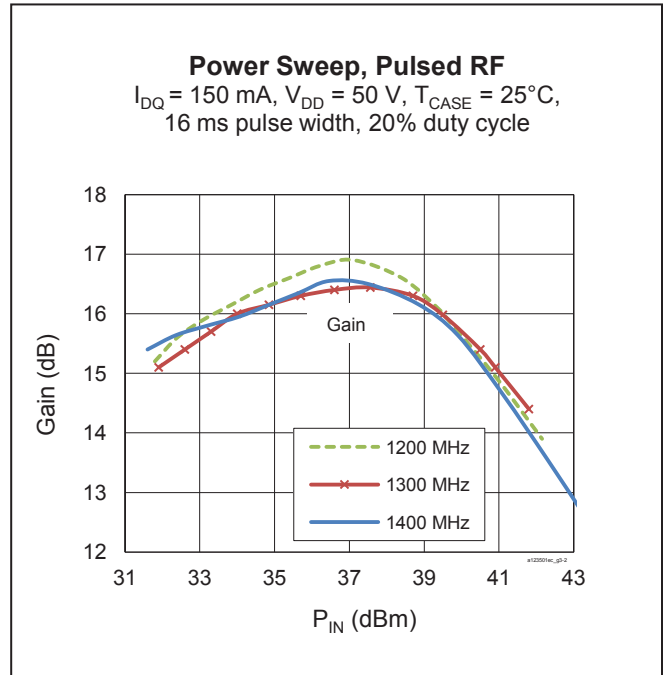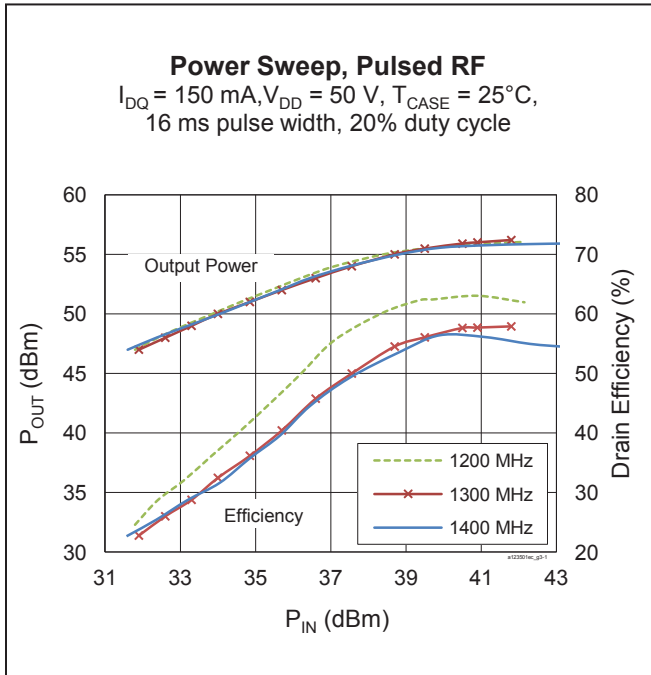


Typical RF Performance (cont.)

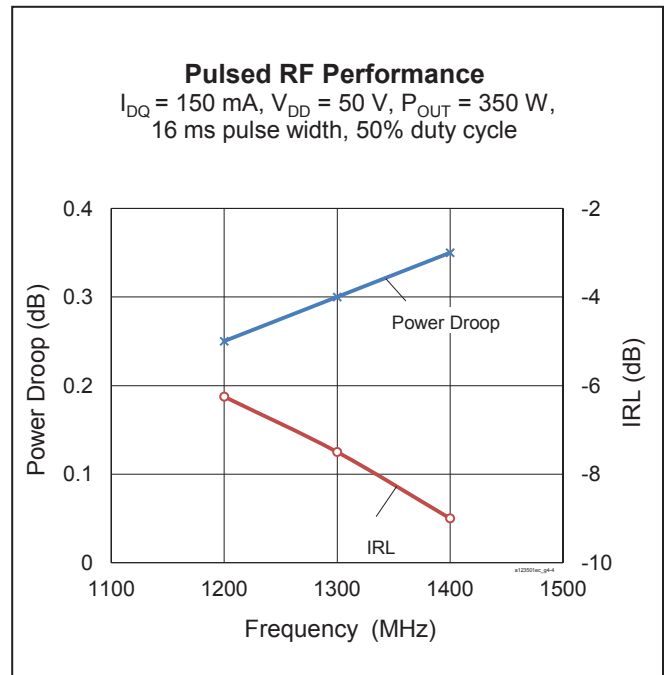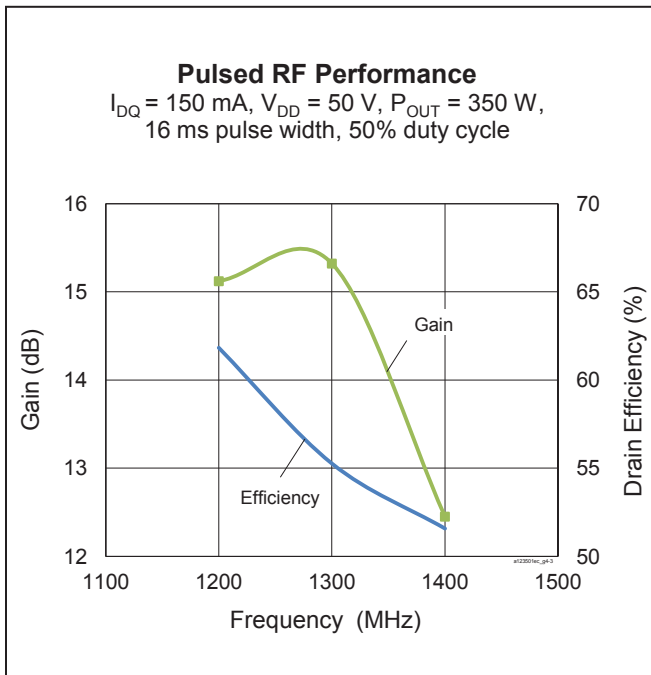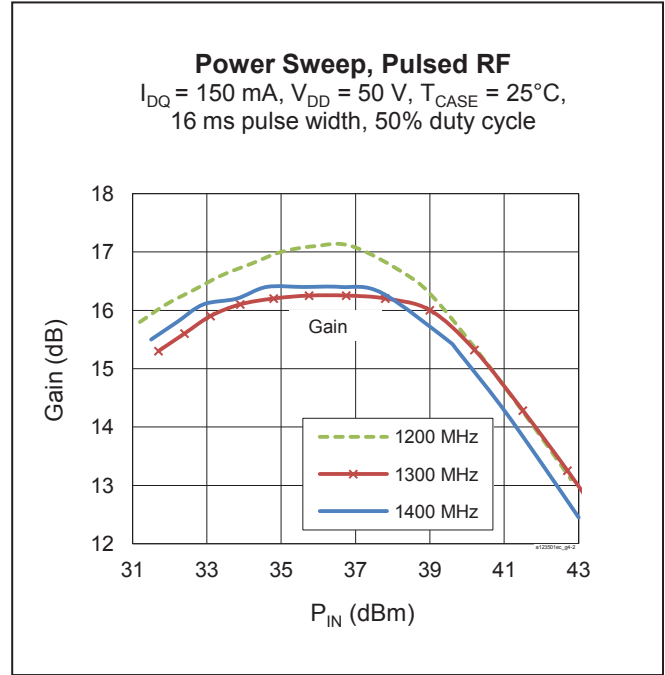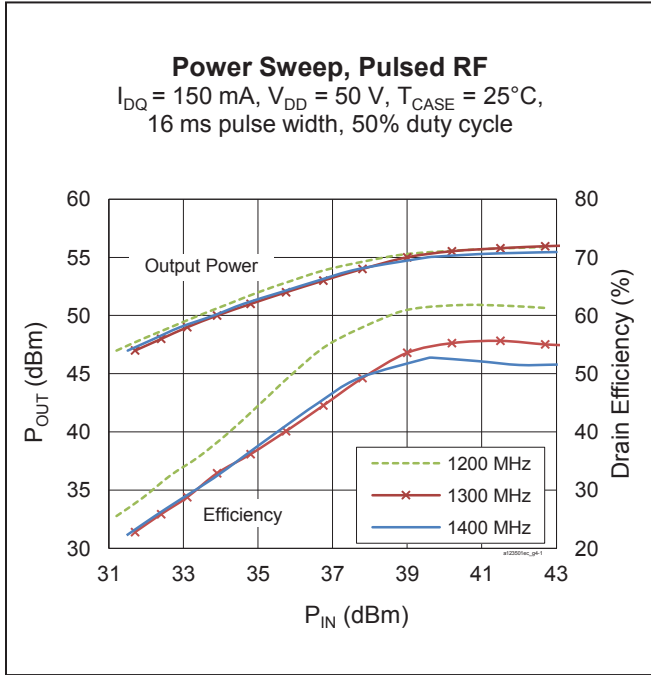

Broadband Circuit Impedance

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
1200	1.25	-1.99	1.96	-2.23
1300	1.54	-1.52	1.59	-2.03
1400	1.66	-1.58	1.26	-1.75



Load Pull Performance

Load Pull at Max P_{OUT} Point – 16 μ s pulse width, 10% duty cycle, class AB, $V_{DD} = 50$ V, 150 mA

Freq [MHz]	ZI [Ω]	P_{IN} [dBm]	P_{OUT} [dBm]	P_{OUT} [W]	P_G [dB]	PAE Eff [%]	Z _{OUT} [Ω]
1200	1.91 – j2.04	41.40	56.40	436.52	15	53.80	1.30 – j2.03
1300	2.72 – j3.13	42.24	56.54	450.82	14.30	54.48	1.25 – j1.94
1400	4.83 – j1.46	41.66	56.31	427.56	14.65	53.27	1.03 – j1.94

Load Pull at Max G_T Point – 16 μ s pulse width, 10% duty cycle, class AB, $V_{DD} = 50$ V, 150 mA

Freq [MHz]	ZI [Ω]	P_{IN} [dBm]	P_{OUT} [dBm]	P_{OUT} [W]	P_G [dB]	PAE Eff [%]	Z _{OUT} [Ω]
1200	1.91 – j2.04	38.10	54.72	296.48	16.62	57.89	3.03 – j3.11
1300	2.72 – j3.13	38.84	54.83	304.09	15.99	62.54	3.22 – j1.63
1400	4.83 – j1.46	37.21	53.42	219.79	16.21	57.25	2.30 – j0.09


Load Pull at Max Efficiency Point – 16 μ s pulse width, 10% duty cycle, class AB, $V_{DD} = 50$ V, 150 mA

Freq [MHz]	ZI [Ω]	P_{IN} [dBm]	P_{OUT} [dBm]	P_{OUT} [W]	P_G [dB]	PAE Eff [%]	Z _{OUT} [Ω]
1200	1.91 – j2.04	39.60	55.80	380.19	16.20	60.71	2.22 – j2.43
1300	2.72 – j3.13	39.44	55.23	333.43	15.79	63.71	2.81 – j1.90
1400	4.83 – j1.46	39.39	55.19	330.37	15.80	62.26	2.40 – j1.45

Z Optimum – 16 μ s pulse width, 10% duty cycle, class AB, $V_{DD} = 50$ V, 150 mA

Freq [MHz]	ZI [Ω]	P_{IN} [dBm]	P_{OUT} [dBm]	P_{OUT} [W]	P_G [dB]	PAE Eff [%]	Z _{OUT} [Ω]
1200	1.91 – j2.04	39.18	55.58	361.41	16.4	60.5	2.41 – j2.50
1300	2.72 – j3.13	39.50	55.30	338.84	15.8	62.6	2.73 – j1.51
1400	4.83 – j1.46	40	55.60	363.08	15.6	60.7	1.86 – j1.37

Reference Circuit

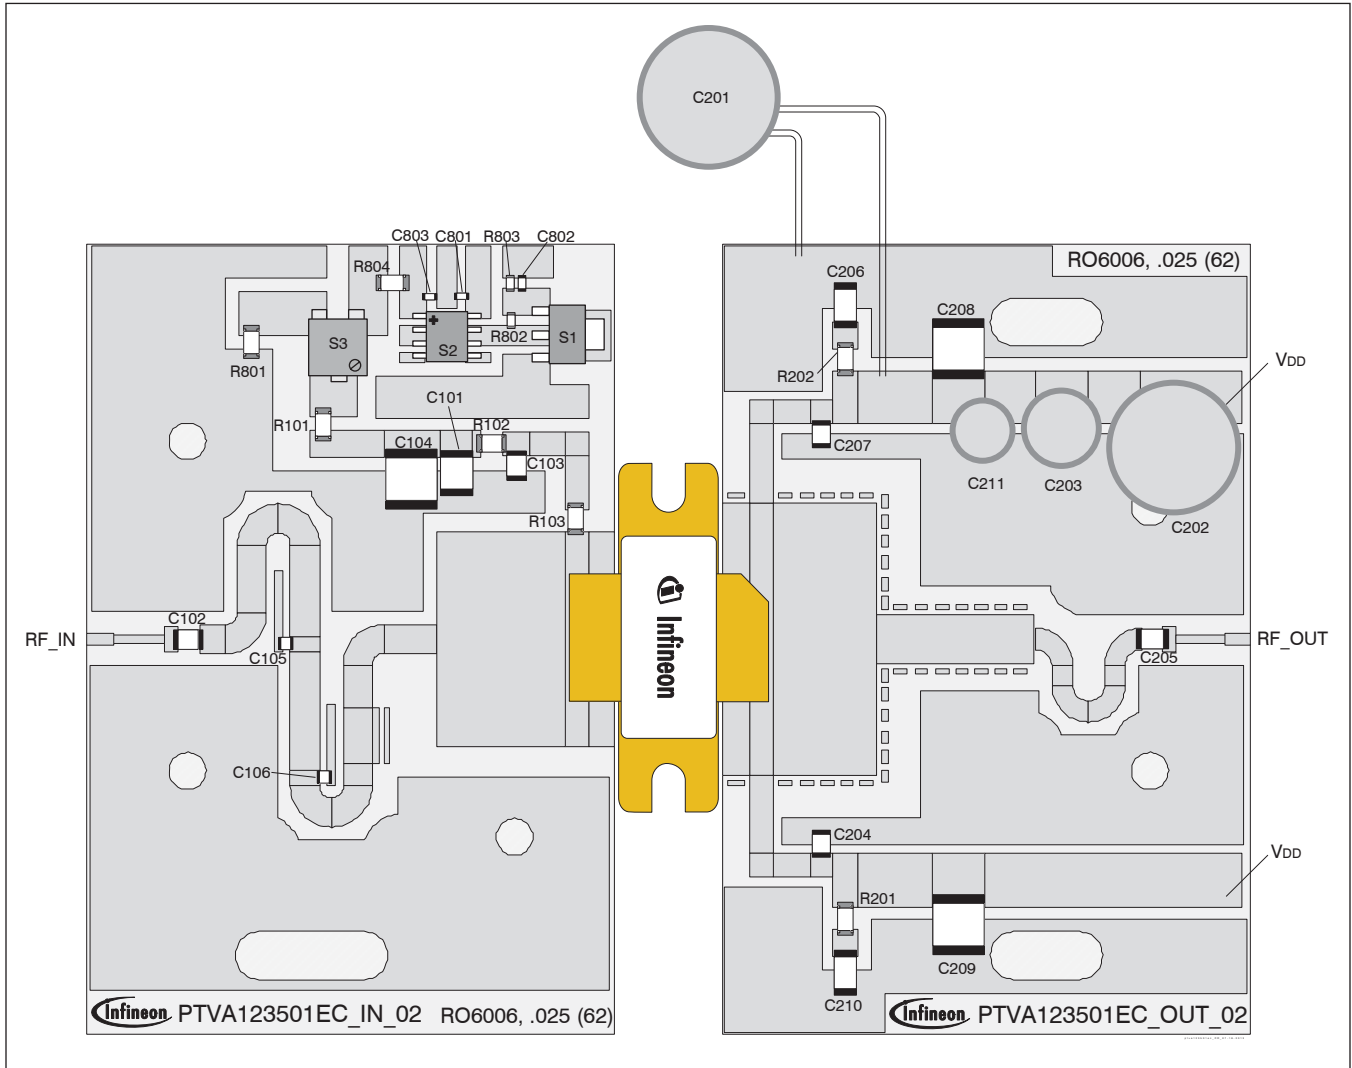

Reference circuit assembly diagram (not to scale)*

Find Gerber files for this test fixture on the Infineon Web site at www.infineon.com/rfpower

Reference Circuit (cont.)


Reference Circuit Assembly

DUT	PTVA123501EC or PTVA123501FC
Test Fixture Part No.	LTN/PTVA123501EC V2 or LTN/PTVA123501FC V1
PCB	Rogers 6006, 0.635 mm [0.025"] thick, 2 oz. copper, $\epsilon_r = 6.15$


Components Information

Component	Description	Suggested Manufacturer	P/N
Input			
C101	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
C102, C103	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C104	Capacitor, 10 μF	TDK Corporation	C5750X5R1H106K230KA
C105	Capacitor, 3 pF	ATC	ATC100A3R0CW150XB
C106	Capacitor, 0.5 pF	ATC	ATC100A0R5CW150XB
C801, C802, C803	Capacitor, 1000 pF	Panasonic Electronic Components	ECJ-1VB1H102K
R101	Resistor, 1000 Ω	Panasonic Electronic Components	ERJ-8GEYJ102V
R102	Resistor, 5600 Ω	Panasonic Electronic Components	ERJ-8GEYJ562V
R103, R804	Resistor, 10 Ω	Panasonic Electronic Components	ERJ-8GEYJ100V
R801	Resistor, 2000 Ω	Panasonic Electronic Components	ERJ-8GEYJ202V
R802	Resistor, 1200 Ω	Panasonic Electronic Components	ERJ-3GEYJ122V
R803	Resistor, 1300 Ω	Panasonic Electronic Components	ERJ-3GEYJ132V
S1	Transistor	Infineon Technologies	BCP56
S2	Voltage Regulator	Texas Instruments	LM7805
S3	Potentiometer, 2k Ω	Bourns Inc.	3224W-1-202E
Output			
C201	Capacitor, 6800 μF	Panasonic Electronic Components	ECO-S2AP682EA
C202	Capacitor, 100 μF	Cornell Dubilier Electronics (CDE)	SK101M100ST
C203	Capacitor, 22 μF	Cornell Dubilier Electronics (CDE)	SEK220M100ST
C204, C205, C207	Capacitor, 39 pF	ATC	ATC100B390KW500XB
C206, C210	Capacitor, 1 μF	TDK Corporation	C4532X7R2A105M230KA
C208, C209	Capacitor, 10 μF	TDK Corporation	C5750X5R1H106K230KA
C211	Capacitor, 10 μF	Panasonic Electronic Components	EEV-HD1H100P
R201, R202	Resistor, 5600 Ω	Panasonic Electronic Components	ERJ-8GEYJ562V

Package Outline Specifications

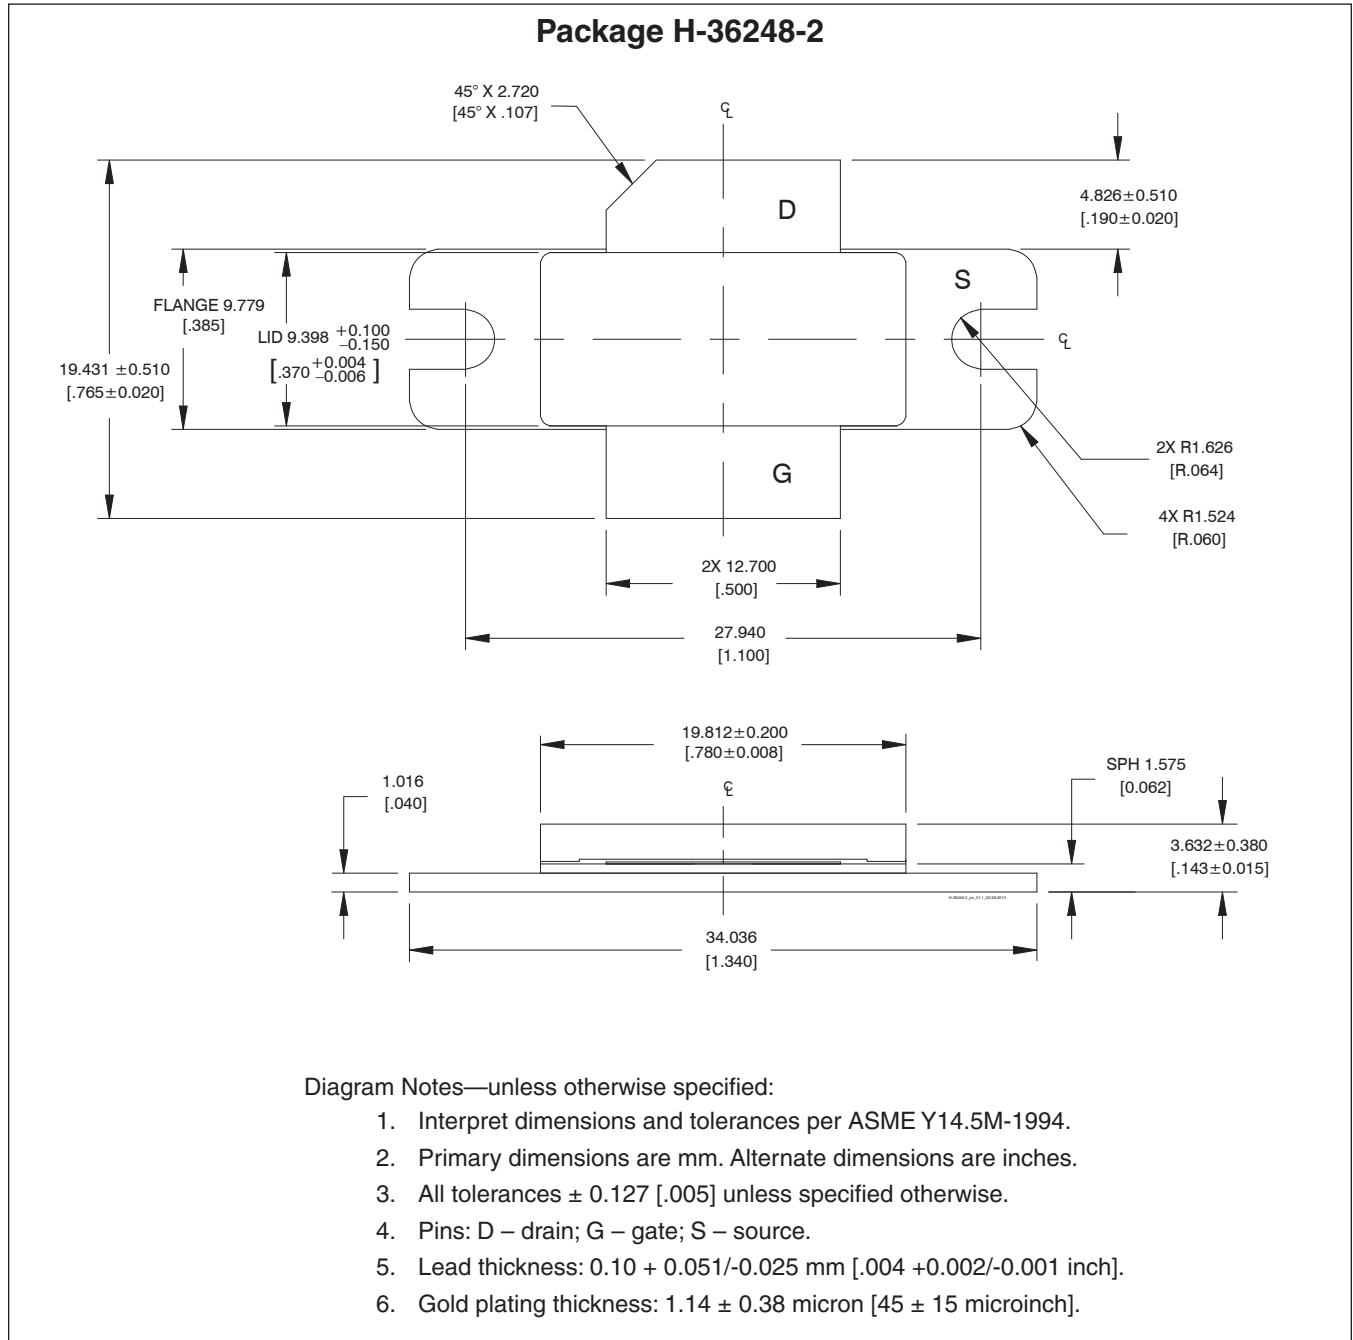

Package Outline Specifications (cont.)

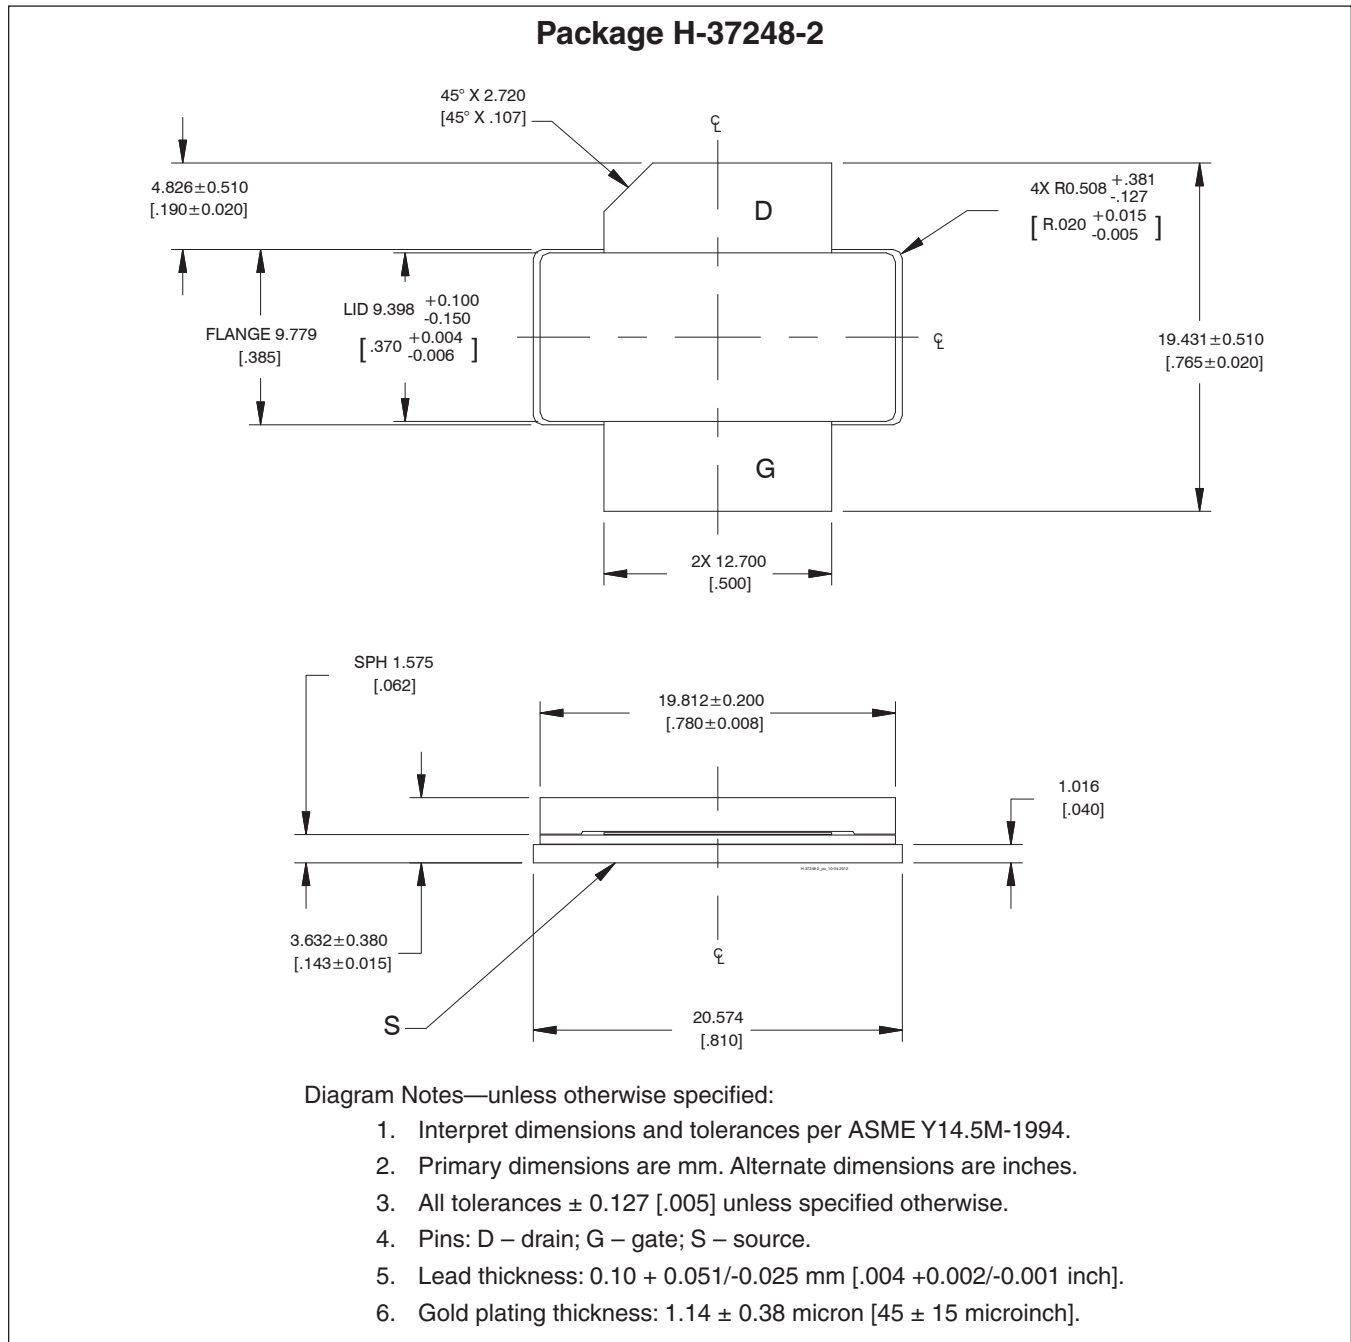

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>

Revision History


Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2012-06-05	Preliminary	All	Data Sheet reflects preliminary specification
02	2013-03-06	Production	All	Data Sheet reflects released product specification
03	2013-07-11	Production	All 1 9 12	Updated to include FC version Revised Pulsed RF performance table Minor cosmetic changes only Added package outline
04	2014-04-29	Production	All 1	Revised product from V1 to V2 Revised target RF Characteristics table
04.1	2014-06-26	Production	All 3	Corrected FC version to V1 throughout Corrected package to H-36248-2 and H-37248-2 in ordering table

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
+1 877 465 3667 (1-877-GO-LDMOS) USA
or +1 408 776 0600 International



Edition 2014-06-26

**Published by
Infineon Technologies AG
85579 Neubiberg, Germany**

**© 2014 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.