



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Low Power, Low Cost

Product Code: FM-TRX2-24G

## Features

- Complete RF Transceiver
- Low current consumption.
- Wide Operating voltage 1.8 – 3.6 Volts
- Easy integration to application.
- Efficient SPI interface
- Operating temperature : - 40°C ~ + 85°C
- Onboard Data Encryption
- Automatic collision avoidance
- ‘Wake on Radio’ feature
- Operating Frequency: 2.4 – 2.483 GHz
- Programmable Output Power
- High Sensitivity
- Data rate 1.2 – 500 kbps

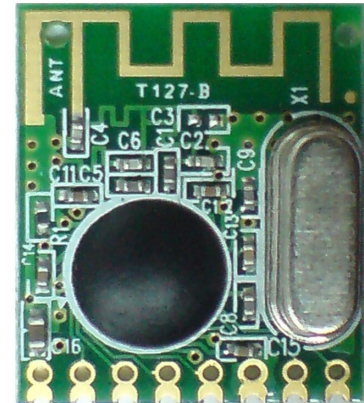

## Applications

- 2400-2483.5MHz ISM/SRD band systems
- Consumer Electronics
- Wireless controllers
- Wireless PC peripherals
- Building / Home Automation

## Description

The QuasarUK ‘TRX2’ transceiver module provides a complete RF subsystem which can be used to transmit and receive data at up to 500Kbps from any standard CMOS/TTL source.

Extensive hardware support is provided for packet handling, data buffering, burst transmissions and link quality indication.

Automatic collision avoidance is also provided with the clear channel assessment features.

The modules are ideal for battery powered applications, current consumption is reduced with the burst transmissions and wake on radio features.

The data stream can be automatically Manchester encoded and decoded ensuring high reliability and low error rates. The frequency, output power and sensitivity are all programmable through an efficient SPI interface.


## Part Numbering

Part Number	Description
QFM-TRX2-24G	Transceiver Module 2.4GHz

\*Range stated is for modules used in direct line of sight, adverse conditions may reduce the maximum range.



## Mechanical Dimensions

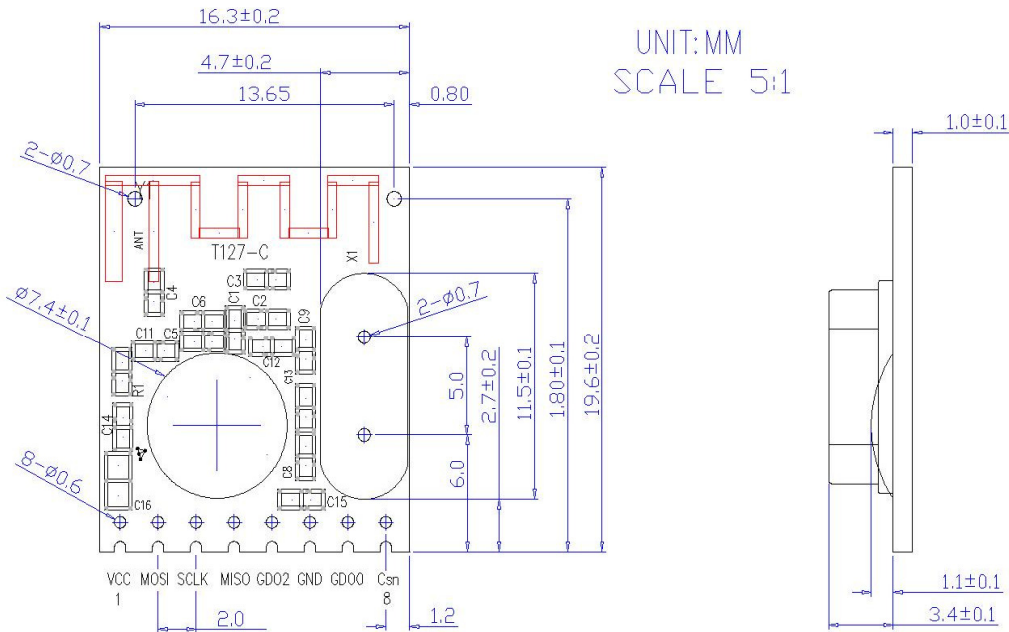

## Pin Descriptions

Pin No	Pin Name	Pin Type	Description
1	VCC	Power	1.8V-3.6V digital power supply for digital I/O's and for the digital core voltage regulator
2	SI	Digital Input	Serial configuration interface, data input
3	SCLK	Digital Input	Serial configuration interface, clock input
4	SO	Digital Output	Serial configuration interface, data output. Optional general output pin when CSn is high
5	GDO2	Digital Output	Digital output pin for general use: <ul style="list-style-type: none"> <li>• Test signals</li> <li>• FIFO status signals</li> <li>• Clear Channel Indicator</li> <li>• Clock output, down-divided from</li> <li>• Serial output RX data</li> </ul>
6	GND	Ground	GND
7	GDO0	Digital I/O	Digital output pin for general use: <ul style="list-style-type: none"> <li>• Test signals</li> <li>• FIFO status signals</li> <li>• Clear Channel Indicator</li> <li>• Clock output, down-divided from XOSC</li> <li>• Serial output RX data</li> <li>• Serial input TX data</li> </ul> Also used as analog test I/O for prototype/production testing
8	CSn	Digital Input	Serial configuration interface, chip select

## 2 Absolute Maximum Ratings

Under no circumstances must the absolute maximum ratings given in Table 1 be violated. Stress exceeding one or more of the limiting values may cause permanent damage to the device.



**Caution!** ESD sensitive device. Precaution should be used when handling the device in order to prevent permanent damage.

Parameter	Min	Max	Units	Condition
Supply voltage	-0.3	3.6	V	All supply pins must have the same voltage
Voltage on any digital pin	-0.3	VDD+0.3, max 3.6	V	
Voltage on the pins RF_P, RF_N and DCOUPL	-0.3	2.0	V	
Input RF level		TBD	dBm	
Storage temperature range	-50	150	°C	
Solder reflow temperature		260	°C	T = 10 s
ESD		2	kV	All pads (excluding RF) have 2kV HBM ESD protection

Table 1: Absolute Maximum Ratings

## 3 Operating Conditions

The operating conditions for **CC2500** are listed Table 2 in below.

Parameter	Min	Max	Unit	Condition
Operating temperature	-40	85	°C	
Operating supply voltage	1.8	3.6	V	All supply pins must have the same voltage

Table 2: Operating Conditions

## 4 Electrical Specifications

Tc = 25°C, VDD = 3.0V if nothing else stated. Measured on Chipcon's **CC2500** EM reference design.

Parameter	Min	Typ	Max	Unit	Condition
Current consumption		8.7		µA	Automatic RX polling once each second, using low-power RC oscillator, with 460Hz filter bandwidth and 250kbps data rate, PLL calibration every 4 <sup>th</sup> wakeup. Average current with signal in channel below carrier sense level.
		35		µA	Same as above, but with signal in channel above carrier sense level, 1.9ms RX timeout, and no preamble/sync word found.
		1.4		µA	Automatic RX polling every 15 <sup>th</sup> second, using low-power RC oscillator, with 460kHz filter bandwidth and 250kbps data rate, PLL calibration every 4 <sup>th</sup> wakeup. Average current with signal in channel below carrier sense level.
		16		µA	Same as above, but with signal in channel above carrier sense level, 14ms RX timeout, and no preamble/sync word found.
		1.8		mA	Only voltage regulator to digital part and crystal oscillator running (IDLE state)
		7.6		mA	Only the frequency synthesizer running (after going from IDLE until reaching RX or TX states, and frequency calibration states)
		15.6		mA	Receive mode, input near sensitivity limit (RX state)
		13.3		mA	Receive mode, input 30dB above sensitivity limit (RX state)
		11.5		mA	Transmit mode, -12dBm output power (TX state)
		15.4		mA	Transmit mode, -6dBm output power (TX state)
		21.6		mA	Transmit mode, 0dBm output power (TX state)
Current consumption in power down modes		180		µA	Voltage regulator to digital part on, all other modules in power down (XOFF state)
		100		µA	Voltage regulator to digital part off, register values retained, XOSC running (SLEEP state with MCSM0.OSC_FORCE_ON set)
		900		nA	Voltage regulator to digital part off, register values retained, low-power RC oscillator running (SLEEP state with WOR enabled)
		500		nA	Voltage regulator to digital part off, register values retained (SLEEP state)

Table 3: Electrical Specifications

## 5 General Characteristics

Parameter	Min	Typ	Max	Unit	Condition/Note
Frequency range	2400		2483.5	MHz	
Data rate	1.2		500	kbps	Modulation formats supported: (Shaped) MSK (differential offset QPSK, up to 500kbps) 2-FSK (up to 250kbps) OOK/ASK (up to 250kbps)  Optional Manchester encoding (halves the data rate).

Table 4: General Characteristics

Parameter	Min	Typ	Max	Unit	Condition/Note
Differential input impedance		200		$\Omega$	Optimised for matching to both 50 $\Omega$ single-ended load and PCB antennas with higher impedance.
Receiver sensitivity		TBD		dBm	500kbps data rate (MSK), 1% packet error rate, 16 bytes packet length, 650kHz digital channel filter bandwidth.
		-88		dBm	250kbps data rate (2-FSK), 1% packet error rate, 16 bytes packet length, 460kHz digital channel filter bandwidth.
		-98		dBm	10kbps data rate (2-FSK), 1% packet error rate, 16 bytes packet length, 232kHz digital channel filter bandwidth.
Saturation		-15		dBm	
Digital channel filter bandwidth	58		650	kHz	User programmable. The bandwidth limits are proportional to crystal frequency (given values assume a 26.0MHz crystal).
Adjacent channel rejection		20-25 (TBD)		dB	Desired channel 3dB above the sensitivity limit. Depends on channel spacing and digital channel filter bandwidth.
Alternate channel rejection		25-35 (TBD)		dB	Desired channel 3dB above the sensitivity limit. Depends on channel spacing and digital channel filter bandwidth.
Image channel rejection		30 (TBD)		dB	Desired channel 3dB above the sensitivity limit. Depends on intermediate frequency (IF), channel spacing and digital channel filter bandwidth. Image channel rejection can be limited by adjacent channel rejection or alternate channel rejection when using low IF (<100kHz). Optimum IF depends on data rate and related chip configurations provided by SmartRF <sup>®</sup> Studio software.
Selectivity at 1MHz offset		-27		dB	Desired channel at -80dBm.
Selectivity at 2MHz offset		-27		dB	Desired channel at -80dBm.
Selectivity at 5MHz offset		-36		dB	Desired channel at -80dBm. Compliant to ETSI EN 300 440 class 2 receiver requirements.
Selectivity at 10MHz offset		-51		dB	Desired channel at -80dBm. Compliant to ETSI EN 300 440 class 2 receiver requirements.
Selectivity at 20MHz offset		-54		dB	Desired channel at -80dBm. Compliant to ETSI EN 300 440 class 2 receiver requirements.
Selectivity at 50MHz offset		-55		dB	Desired channel at -80dBm. Compliant to ETSI EN 300 440 class 2 receiver requirements.
Spurious emissions			-57	dBm	25MHz – 1GHz
			-47	dBm	Above 1GHz

Table 5: RF Receive Section


## 7 RF Transmit Section

Tc = 25°C, VDD = 3.0V if nothing else stated. Measured on Chipcon's **CC2500** EM reference design.

Parameter	Min	Typ	Max	Unit	Condition/Note
Differential load impedance		200		Ω	Optimised for matching to both 50Ω single-ended load and PCB antennas with higher impedance.
Output power, highest setting		1		dBm	Output power is programmable. Delivered to 50Ω single-ended load via Chipcon reference RF matching network.
Output power, lowest setting		-30		dBm	Output power is programmable. Delivered to 50Ω single-ended load via Chipcon reference RF matching network.
Adjacent channel power		-26		dBc	The given values are for 1MHz channel spacing (±1MHz from carrier) and 500kbps MSK.
Alternate channel power		-45		dBc	The given values are for 1MHz channel spacing (±2MHz from carrier) and 500kbps MSK.
Spurious emissions			-36 -54 -47 -41 -30	dBm	25MHz – 1GHz 47-74, 87.5-118, 174-230,470-862MHz 1800MHz-1900MHz (restricted band in Europe) At 2-RF and 3-RF (restricted bands in USA) Otherwise above 1GHz

**Table 6: RF Transmit Parameters**

### Application Circuit

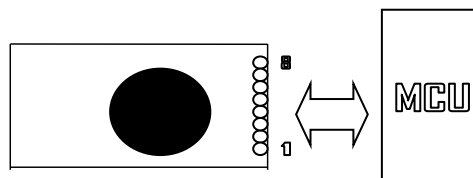

For Complete Detailed Specification, please visit [www.ti.com](http://www.ti.com) and Download Data Sheet CC2500

**QuasarUK is an internet based company. All Sales / support and interface is via our website at**

**[www.quasaruk.co.uk](http://www.quasaruk.co.uk)**

**for Sales:**

**Sales :** [sales@quasaruk.co.uk](mailto:sales@quasaruk.co.uk)

**for Support:**

**Support :** [sales@quasaruk.co.uk](mailto:sales@quasaruk.co.uk)

**Support Tel: 0907 639 0000**

Calls charged at £0.60 per minute from a BT landline other networks may vary.  
Callers must be 18 or over and have the bill payers permission. Service provided by StealthNET Ltd :08444150774