

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








MODEL NO.	PACKAGING		
134-1000-005	ONE PCS PER BAG		

	REV	ECO	DATE	ı	
LA BING	001	ECO-17-0032	11/28/2017		
				ı	
				1	

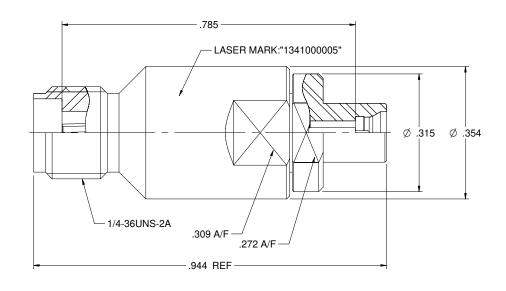

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:

- 1.1 BODY& COTACT BODY: PASSIVATED STAINLESS STEEL
- 1.2 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
- 1.3 INSULATOR1: ULTEM1000 AMBER
- 1.4 INSULATOR2: PTFE WHITE

2. ELECTRICAL:

- 2.1 IMPEDANCE: 50 OHMS
- 2.2 FREQUENCY RANGE: 0-40 GHz
- 2.3 VOLTAGE STANDING WAVE RATIO: 1.3 MAX
- 2.4 DIELECTRIC WITHSTADING VOLTAGE: 325 VRMS MIN
- 2.5 CONTACT RESISTANCE:

 - 2.5.1 CENER CONTACT: 6 MILLIOHM MAX 2.5.2 OUTER CONTACT: 2 MILLIOHM MAX
- 2.6 INSULATOR RESISTANCE: 5000 MEGOHM MIN

3. MECHANICAL:

- 3.1 ENGAGEMENT FORCE: 0.23 NM MAX (SMK); FULL DETENT 19 N MAX (SMPM)
- 3.2 DISENGAGEMENT FORCE: 0.23 NM MAX (SMK); FULL DETENT 29 N MAX (SMPM)
- 3.3 CONTACT RETENTION: 22 N MIN
 3.4 DURABILITY: 500 CYCLES (SMK); FULL DETENT: 100 CYCLES MIN(SMPM)

4. ENVIRONMENT:

- 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
- 4.2 OPERATING TEMPERATURE: -55TO 125°C
- 4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
- 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
- 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

a cinch	Model No. 134-1000-005		Johnson				
RoHS2 2011/65/EU		3RD ANGLE PROJECTION	Title: ADAPTER ASSEMBLY,SMK(2.92mm) JACK TO SMPM PLUG				
	.XXX ±.02	Drawn by: Betty.Yu	Drawi		000-005		Rev. 001
INTERPRET DRAWING IN. ACCORDANCE WITH ASME Y14.5-2008.	.XXXXX±.01 ANGLES ±5°	Date: 10/10/2017	C	DO NOT SCALE	Workmanship Std: NONE	Sheet	1 of 1