



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- Efficiency up to 96%, Non isolated, no need for heatsinks
- Pin-out compatible with LM78XX Linears
- Low profile(L*W*H=11.5*8.5*17.5mm)
- High voltage input range, up to 72V
- Short circuit protection, Thermal shutdown
- Non-standard outputs available as specials between 3.3V~24V
- Low ripple and noise
- "L" version with 90° pins
- See Ininline Application Notes for use as an inverter (alternative to LM79xx Linear)

Description

The R-78HBxx-Series high efficiency, high input voltage switching regulators are ideally suited to replace 78xx linear regulators and are pin compatible. The efficiency of up to 96% means that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs.

An input voltage range of up to 8:1 is unsurpassed by any other converter and allows the full stored energy utilization of standard and high voltage batteries. The fully protected output is ideal for industrial applications (especially for industry standard 24VDC bus supplies) and the L-Version with 90° pins allows direct replacement for laid-flat regulators where component height is at a premium. Low ripple and noise figures and a short circuit input current of typically only 15mA round off the specifications of this versatile converter series.

Typical applications include telecommunication, automotive, industrial, aerospace and battery powered applications.

Selection Guide

| Part Number SIP3 | Input Range (V) | Output Voltage (V) | Output Current (A) | Efficiency | | |
|---------------------|-----------------|--------------------|--------------------|------------|---------|---------|
| | | | | Vmin. (%) | 30V (%) | 72V (%) |
| R-78HB3.3-0.5 | 9 - 72 | 3.3 | 0.5 | 82 | 80 | 76 |
| R-78HB5.0-0.5 | 9 - 72 | 5.0 | 0.5 | 87 | 85 | 81 |
| R-78HB6.5-0.5 | 9 - 72 | 6.5 | 0.5 | 91 | 87 | 84 |
| R-78HB9.0-0.5 | 14 - 72 | 9.0 | 0.5 | 92 | 90 | 86 |
| R-78HB12-0.5 | 17 - 72 | 12 | 0.5 | 94 | 93 | 89 |
| R-78HB15-0.5 | 20 - 72 | 15 | 0.5 | 95 | 94 | 91 |
| R-78HB24-0.3 | 36 - 72 | 24 | 0.3 | 96 | | 92 |

* add Suffix "L" for 90° bent pins, e.g. R-78HB5.0-0.5L

Specifications (refer to the standard application circuit, Ta: 25°C, minimum load = 10%)

| Characteristics | Conditions | Min. | Typ. | Max. |
|--|---------------------------------|------|--------------------------------|----------|
| Input Voltage Range | See table | 9V | 72V | 75V max. |
| Output Voltage Range (for customized parts) | All Series | 3.3V | | 24V |
| Output Current (see Note 1) | 3.3V, 5V, 6.5V, 9V, 12V, 15V | 10mA | | 500mA |
| | 24V | 6mA | | 300mA |
| Short Circuit Input Current | All Series | | 15mA | 25mA |
| Internal Input Filter | | | 1µF Capacitor | |
| Internal Power Dissipation | | | | 0.65W |
| Short Circuit Protection | | | Continuous, automatic recovery | |
| Output Voltage Accuracy | At 100% Load | | ±2% | ±3% |
| Line Voltage Regulation | Vin = min. to max. at full load | | 0.4% | 1% |
| Load Regulation | 10% to 100% full load | | 0.3% | 0.6% |
| Dynamic Load Stability (with Output Capacitor=100µF) | 100% <-> 50% load | | ±75mV | ±100mV |
| Ripple & Noise (without Output Capacitor) | 10% to 100% full load | | 20mVp-p | 60mVp-p |

continued on next page

INNOLINE DC/DC-Converter

with year Warranty

RECOM

0.5 AMP SIP3


Single Output



EN-55022 Certified
EN-55024 Certified
IEC/EN-60950-1 Certified

R-78HB


Derating-Graph (Ambient Temperature)

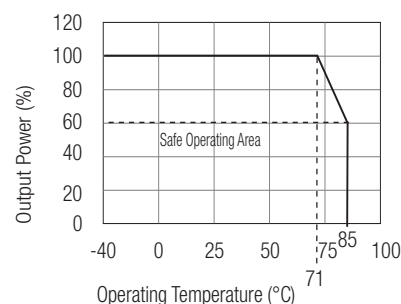

Specifications (refer to the standard application circuit, Ta: 25°C, minimum load = 10%)


| Characteristics | Conditions | Min. | Typ. | Max. |
|---------------------------------|--|---------------------|------------------------------------|------------------------------|
| Temperature Coefficient | -40°C ~ +85°C ambient | | | 0.015%/°C |
| Max capacitance Load | with normal start-up time, no external components | | | 100µF |
| | with <1 second start up time + diode protection circuit | | | 6800µF |
| Switching Frequency (See Graph) | Full Load | 120kHz | | 800kHz |
| Quiescent Current | Vin = 48VDC. at minimum load | 1mA | | 5mA |
| Operating Temperature Range | | -40°C | | +85°C |
| Operating Case Temperature | | | | +100°C |
| Storage Temperature Range | | -55°C | | +125°C |
| Case Thermal Impedance | | | | 60°C / W |
| Relative Humidity | | | | 95% RH |
| Case Material | | | Non-Conductive Black Plastic | |
| Potting Material | | | Silicone (UL94V-0) | |
| Package Weight | | | 4g | |
| Packing Quantity | | | | 42 pcs per Tube |
| Soldering Temperature | | | | 265°C max./10 sec. |
| Conducted Emissions | EN55022 | | | Class B |
| Radiated Emissions | EN55022 | | | Class B |
| ESD | EN61000-4-2 | | | Class A |
| IEC/EN General Safety | Report: LVD 1603123 | | IEC/EN-60950-1, 2nd Edition + AM:2 | |
| MTBF (+25°C) (+71°C) | } Detailed Information see Application Notes chapter "MTBF" | using MIL-HDBK 217F | | 7395 x 10 ³ hours |
| | | using MIL-HDBK 217F | | 1242 x 10 ³ hours |

Typical Application Circuit

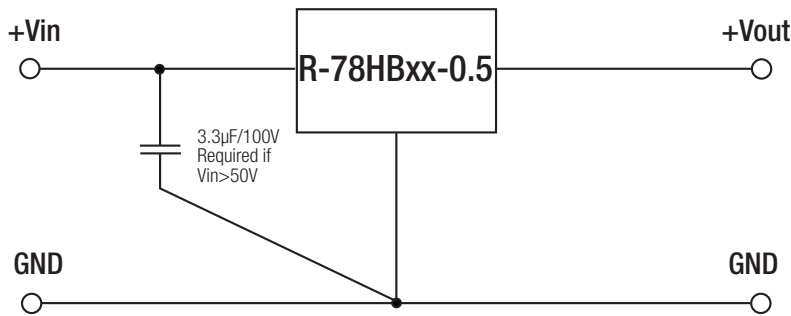


Typical Characteristics

**Switching
Frequency
vs
Load**





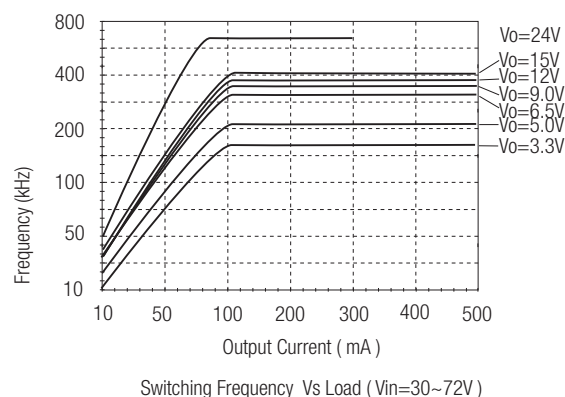


Typical Characteristics

Efficiency

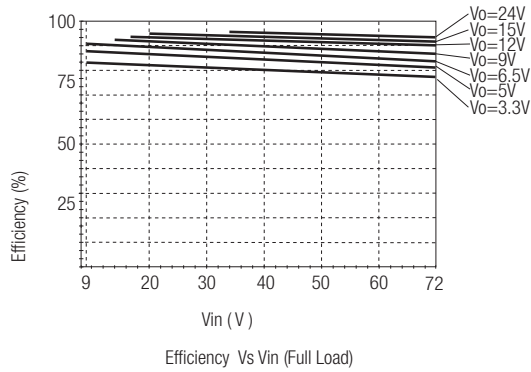

Ripple

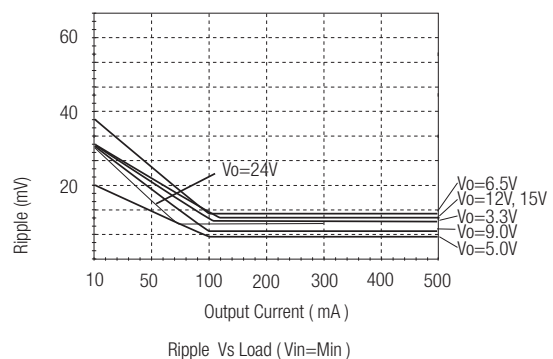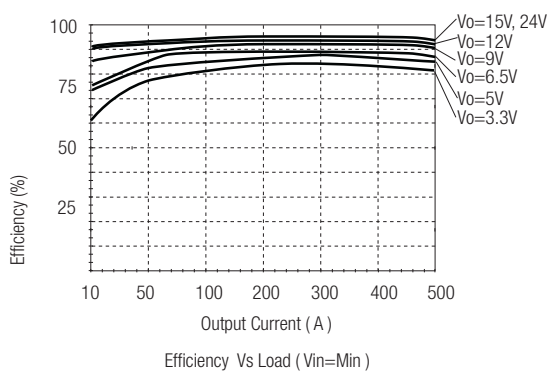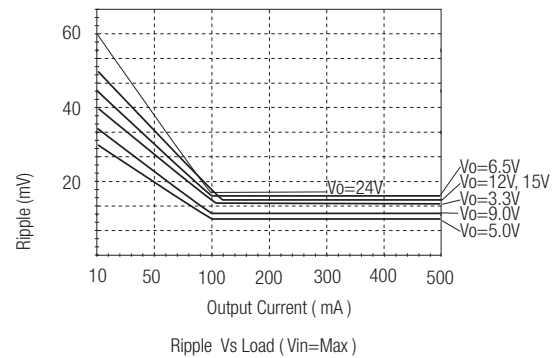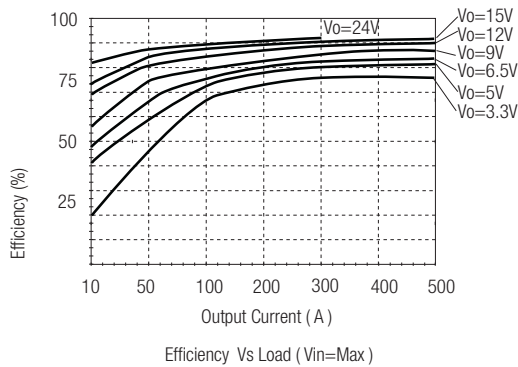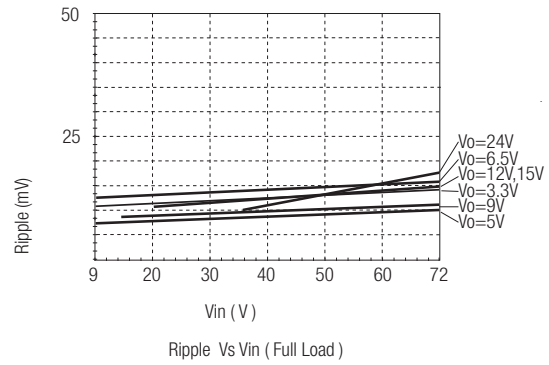


*Note: Operation under no load will not damage these devices, however they may not meet all specifications. A minimum load of 10mA is recommended

Optional Protection Circuit


Optional Protection 1:

Add a blocking diode to Vout if current can flow backwards into the output, as this can damage the converter when it is powered down.

The diode can either be fitted across the device if the source is low impedance or fitted in series with the output (recommended).

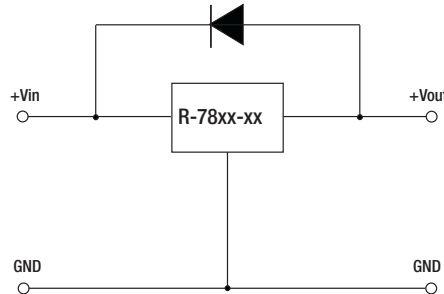


Optional Protection 2:

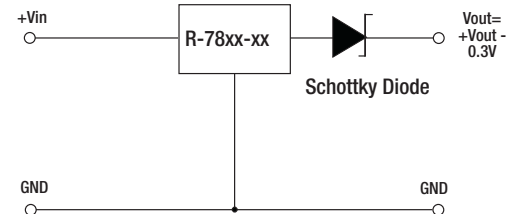

Typical Application

High Input Voltage Multiple Output Supply


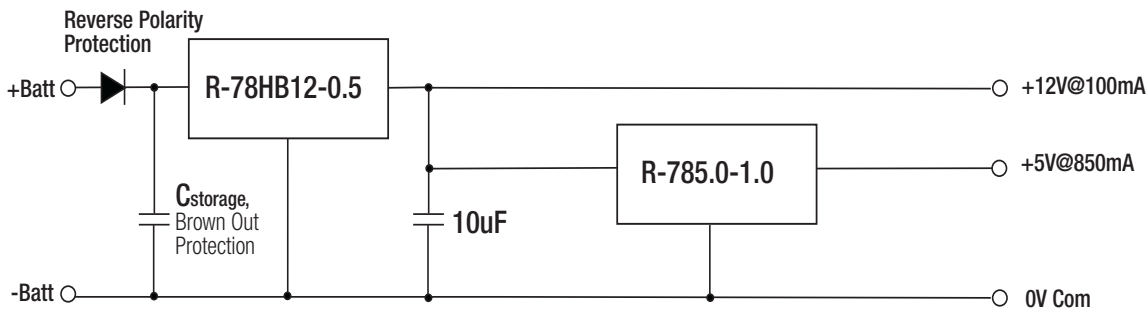


- Wide input range 18V to 72V - can be used with 24V, 48V or 60V batteries
- +12V output for interface and display electronics
- +5V high current output for digital electronics
- Further decoupling filtering may be necessary between the converters



R-78HB

Package Style and Pinning (mm)


SIP3 PIN Package

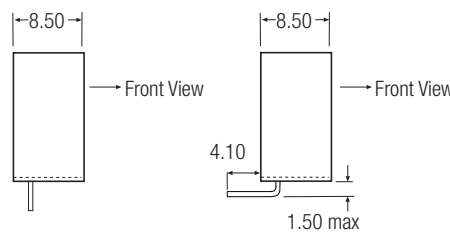

L - Version



Recommended Footprint Details



Pin Connections

| Pin # | Connection |
|-------|------------|
| 1 | +Vin |
| 2 | GND |
| 3 | +Vout |

xx.x ±0.5mm

xx.xx ±0.25mm