

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








MODEL NO.	PACKAGING
134-1000-009	ONE PCS PER BAG

	REV	ECO	DATE	ı
Link species	001	ECO-17-0032	11/28/2017	ı
				ı
				ı

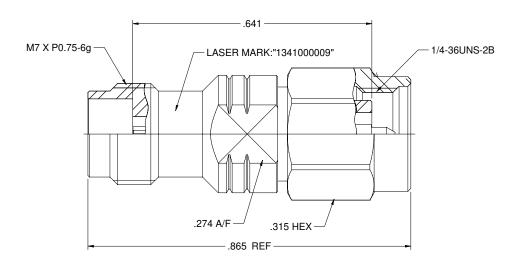

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL & FINISH:

- 1.1 BODY & SHELL: PASSIVATED STAINLESS STEEL
- 1.2 CONTACT PIN: GOLD PLATED BERYLLIUM COPPER
- 1.3 INSULATOR: ULTEM 1000 AMBER
- 1.4 GASKET: SILICONE RED
- 1.5 C RING: BERYLLIUM COPPER

2. ELECTRICAL:

- 2.1 IMPEDANCE: 50 OHMS
- 2.2 FREQUENCY RANGE: 0-46 GHz
- 2.3 INSERTION LOSS: 0.3DB MAX
- 2.4 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
- 2.5 VOLTAGE STANDING WAVE RATIO: DC- 4 GHZ: 1.05 MAX 4 -20 GHZ: 1.08 MAX

20-46 GHZ: 1.15 MAX

2.6 CONTACT RESISTANCE: CENTER CONTACT: 4 MILLIOHMS MAX OUTERR CONTACT: 2.5 MILLIOHMS MAX

2.7 INSULATION RESISTANCE: 5000 MOHM MIN

3. MECHANICAL:

- 3.1 ENGAGEMENT/ DISENGAGEMENT FORCE: 0.23 NM MAX
- 3.2 COUPLING PROOF TORQUE: 1.7NM MIN (SMK)
- 3.3 COUPLING NUT RETENTION FORCE: 267 N MÍN
- 3.4 CONTACT RETENTION: 20 N MIN
- 3.5 DURABILITY: 500 CYCLES MIN

4. ENVIRONMENT:

- 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B.
- 4.2 OPERATING TEMPERATURE: -55 TO 125°C
- 4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
- 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
- 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

Model No. 134-1		4-1000-009	Johnson				
-	RoHS2	Cage Code	Title:		SSEMBLY,2.4	mm JA0	CK
This PROPRIETARY Dissument	2011/65/EU	3RD ANGLE PROJECTION	TO SMK(2.92mm) PLUG				
is properly of Circle Connectivity Solutions. It is confidential in nature, non-bandwiddle, and	UNLESS CONSTRUCTION SPECIFIES UNITS ROM		Drawi	ng No.			Rev.
understanding that it is not brained or cognitive filling permanent and it returnable upon demand.	.XXX±.02	Betty.Yu		134-1	000-009		001
INTERPRET DRAWING IN	.XXXX±.01 ANGLES ±5°	Date: 10/07/0017	Size	DO NOT SCALE	Workmanship Std: NIONE	Shoot	1 of 1