

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








MODEL NO.	PACKAGING
134-1000-012	ONE PCS PER BAG

	REV	ECO	DATE	
NAME OF TAXABLE PARTY.	001	ECO-17-0032	11/28/2017	

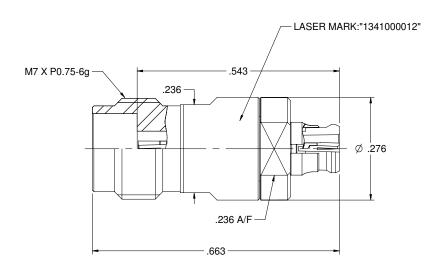

## NOTES: UNLESS OTHERWISE SPECIFIED

- 1. MATERIAL & FINISH:
- 1.1 BODY: PASSIVATED STAINLESS STEEL
- 1.2 CONTACT PIN, C RING & CONTACT BODY: GOLD PLATED BERYLLIUM COPPER
- 1.3 INSULATOR: ULTEM 1000 AMBER
- 2. ELECTRICAL:
- 2.1 IMPEDANCE: 50 OHMS
- 2.2 FREQUENCY RANGE: 0-40 GHz
- 2.3 VOLTAGE STANDING WAVE RATIO: 1.25 MAX
- 2.4 CONTACT RESISTANCE: CENTER CONTACT: 6 MILLIOHMS MAX OUTERR CONTACT: 2.5 MILLIOHMS MAX
- 2.5 DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS MIN
- 2.6 INSULATION RESISTANCE: 5000 MOHM MIN
- 3. MECHANICAL:
- 3.1 ENGAGEMENT FORCE: 0.23 NM MAX (2.4MM)
  - FULL DETENT: 68 N MAX, LIMITED DETENT: 45 N MAX, SMOOTH BORE: 9 N MAX (SMP)
- 3.2 DISENGAGEMENT FORCE: 0.23 NM MAX (2.4MM)
  - FULL DETENT: 22 N MAX, LIMITED DETENT: 9 N MAX, SMOOTH BORE: 2.2N MAX (SMP)
- 3.3 CONTACT RETENTION: 20 N MIN
- 3.4 DURABILITY: 500 CYCLES MIN (2.4MM)
  FULL DETENT: 100 CYCLES MIN, LIMITED DETENT: 500 CYCLES MIN,SMOOTH BORE:1000 CYCLES MIN (SMP)
- 4. ENVIRONMENT:
- 4.1 THERMAL SHOCK: MIL-STD-202, METHOD 107, CONDITION B. 4.2 OPERATING TEMPERATURE: -55 TO 125°C
- 4.3 SALT SPRAY: MIL-STD-202, METHOD 101, CONDITION B
- 4.4 SHOCK: MIL-STD-202, METHOD 213, CONDITION I
- 4.5 VIBRATION: MIL-STD-202, METHOD 204, CONDITION D
- 4.6 MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

@ cinch	Model No. 134-1000-012		Johnson				
Service Control	RoHS2	Cage Code	Title: ADAPTER ASSEMBLY,2.4mm JACK TO SMP JACK Drawing No. Rev.				CK
This PROPERLIAN Document is properly of Crisis Connectionly Socializes. It is confidential in	2011/65/EU UNLESS OTHERWISE SPECIFIED UNITS INCH	SED ANGLE PROJECTION					
pound with the stream understanding that it is not based or capital without pervision and is returnable upon demand.	.XXX ±.02	Betty.Yu	134-1000-012 001				
INTERPRET DRAWING IN ACCORDANCE WITH ASME	.XXXX ±.01 ANGLES ±5*	Date: 10/27/2017	Size	DO NOT SCALE	Workmanship Std: NIONE	Sheet	1 of 1