



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# PIN Power Inductor RCH-875



## Dimension - [mm]

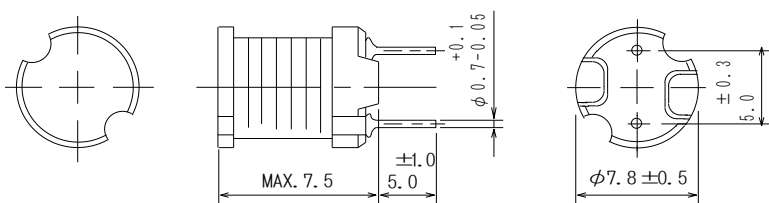

## Schematics - [mm]



## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 8.3 × 8.3 × 7.5mm Max.
- Product weight: 1.13g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Environmental Data

- Operating temperature range:  $-40^{\circ}\text{C} \sim +100^{\circ}\text{C}$  (including coil's self temperature rise)
- Storage temperature range:  $-40^{\circ}\text{C} \sim +100^{\circ}\text{C}$

## Packaging

- Box packaging.

## Applications

- Ideally Used in Printers, LCD TV, DVD, Printer, Copy Machine, Main board of the compounding machines, etc as DC-DC Converter inductors.

# PIN Power Inductor RCH-875



## Electrical Characteristics

Part Name	Stamp	Inductance ( $\mu\text{H}$ ) [ within ] ※ 1	D.C.R ( $\Omega$ ) [Max.] (at20°C)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
RCH875NP-2R2M	2R2M	2.2 $\pm$ 20%	13.7m	5.8	3.0
RCH875NP-2R8M	2R8M	2.8 $\pm$ 20%	15.3m	5.0	2.9
RCH875NP-3R5M	3R5M	3.5 $\pm$ 20%	17.2m	4.7	2.8
RCH875NP-4R4M	4R4M	4.4 $\pm$ 20%	19.1m	4.5	2.7
RCH875NP-5R1M	5R1M	5.1 $\pm$ 20%	21.2m	4.2	2.6
RCH875NP-6R0M	6R0M	6.0 $\pm$ 20%	22.2m	4.0	2.5
RCH875NP-7R1M	7R1M	7.1 $\pm$ 20%	24.2m	3.4	2.3
RCH875NP-8R2M	8R2M	8.2 $\pm$ 20%	26.5m	3.1	2.2
RCH875NP-100M	100M	10 $\pm$ 20%	0.05	2.9	2.1
RCH875NP-120M	120M	12 $\pm$ 20%	0.06	2.5	1.8
RCH875NP-150K	150K	15 $\pm$ 10%	0.07	2.2	1.4
RCH875NP-180K	180K	18 $\pm$ 10%	0.08	1.9	1.3
RCH875NP-220K	220K	22 $\pm$ 10%	0.09	1.8	1.2
RCH875NP-270K	270K	27 $\pm$ 10%	0.11	1.7	1.0
RCH875NP-330K	330K	33 $\pm$ 10%	0.13	1.5	1.0
RCH875NP-390K	390K	39 $\pm$ 10%	0.14	1.3	0.95
RCH875NP-470K	470K	47 $\pm$ 10%	0.15	1.3	0.90
RCH875NP-560K	560K	56 $\pm$ 10%	0.18	1.2	0.73
RCH875NP-680K	680K	68 $\pm$ 10%	0.20	1.1	0.68
RCH875NP-820K	820K	82 $\pm$ 10%	0.24	1.0	0.63
RCH875NP-101K	101K	100 $\pm$ 10%	0.35	0.89	0.59
RCH875NP-121K	121K	120 $\pm$ 10%	0.36	0.81	0.50
RCH875NP-151K	151K	150 $\pm$ 10%	0.42	0.72	0.46
RCH875NP-181K	181K	180 $\pm$ 10%	0.57	0.66	0.41
RCH875NP-221K	221K	220 $\pm$ 10%	0.63	0.57	0.38
RCH875NP-271K	271K	270 $\pm$ 10%	0.88	0.51	0.32
RCH875NP-331K	331K	330 $\pm$ 10%	1.05	0.46	0.30
RCH875NP-391K	391K	390 $\pm$ 10%	1.17	0.44	0.29



## Electrical Characteristics


Part Name	Stamp	Inductance ( $\mu\text{H}$ ) [ within ] ※ 1	D.C.R. ( $\Omega$ ) [ Max. ] (at20°C)	Saturation Current (A) ※2	Temperature Rise Current (A) ※3
RCH875NP-471K	471K	470 $\pm$ 10%	1.34	0.41	0.28
RCH875NP-561K	561K	560 $\pm$ 10%	1.72	0.36	0.23
RCH875NP-681K	681K	680 $\pm$ 10%	1.96	0.33	0.22
RCH875NP-821K	821K	820 $\pm$ 10%	2.56	0.30	0.19
RCH875NP-102K	102K	1.0mH $\pm$ 10%	2.94	0.27	0.18
RCH875NP-122K	122K	1.2mH $\pm$ 10%	4.04	0.24	0.16
RCH875NP-152K	152K	1.5mH $\pm$ 10%	4.70	0.22	0.15
RCH875NP-182K	182K	1.8mH $\pm$ 10%	5.05	0.20	0.14
RCH875NP-222K	222K	2.2mH $\pm$ 10%	6.25	0.18	0.13
RCH875NP-272K	272K	2.7mH $\pm$ 10%	8.72	0.16	0.10
RCH875NP-332K	332K	3.3mH $\pm$ 10%	10.6	0.15	95m
RCH875NP-392K	392K	3.9mH $\pm$ 10%	14.2	0.14	81m
RCH875NP-472K	472K	4.7mH $\pm$ 10%	16.7	0.12	74m
RCH875NP-562K	562K	5.6mH $\pm$ 10%	18.7	0.11	69m
RCH875NP-682K	682K	6.8mH $\pm$ 10%	21.8	0.10	67m
RCH875NP-822K	822K	8.2mH $\pm$ 10%	28.7	93m	63m
RCH875NP-103K	103K	10mH $\pm$ 10%	33.0	84m	54m

※1: Inductance measuring frequency: 2.2 $\mu\text{H}$  ~ 8.2 $\mu\text{H}$  at 7.96MHz  
 10 $\mu\text{H}$  ~ 82 $\mu\text{H}$  at 2.52MHz  
 100 $\mu\text{H}$  ~ 10mH at 1 kHz

※2: Saturation current: The DC current at which the inductance decreases to 90% of it's initial value.


※3: Temperature rise current: The DC current at which the temperature rise is  $\Delta t=20^\circ\text{C}$ . ( $T_a=20^\circ\text{C}$ ).

# PIN Power Inductor RCH-875



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$












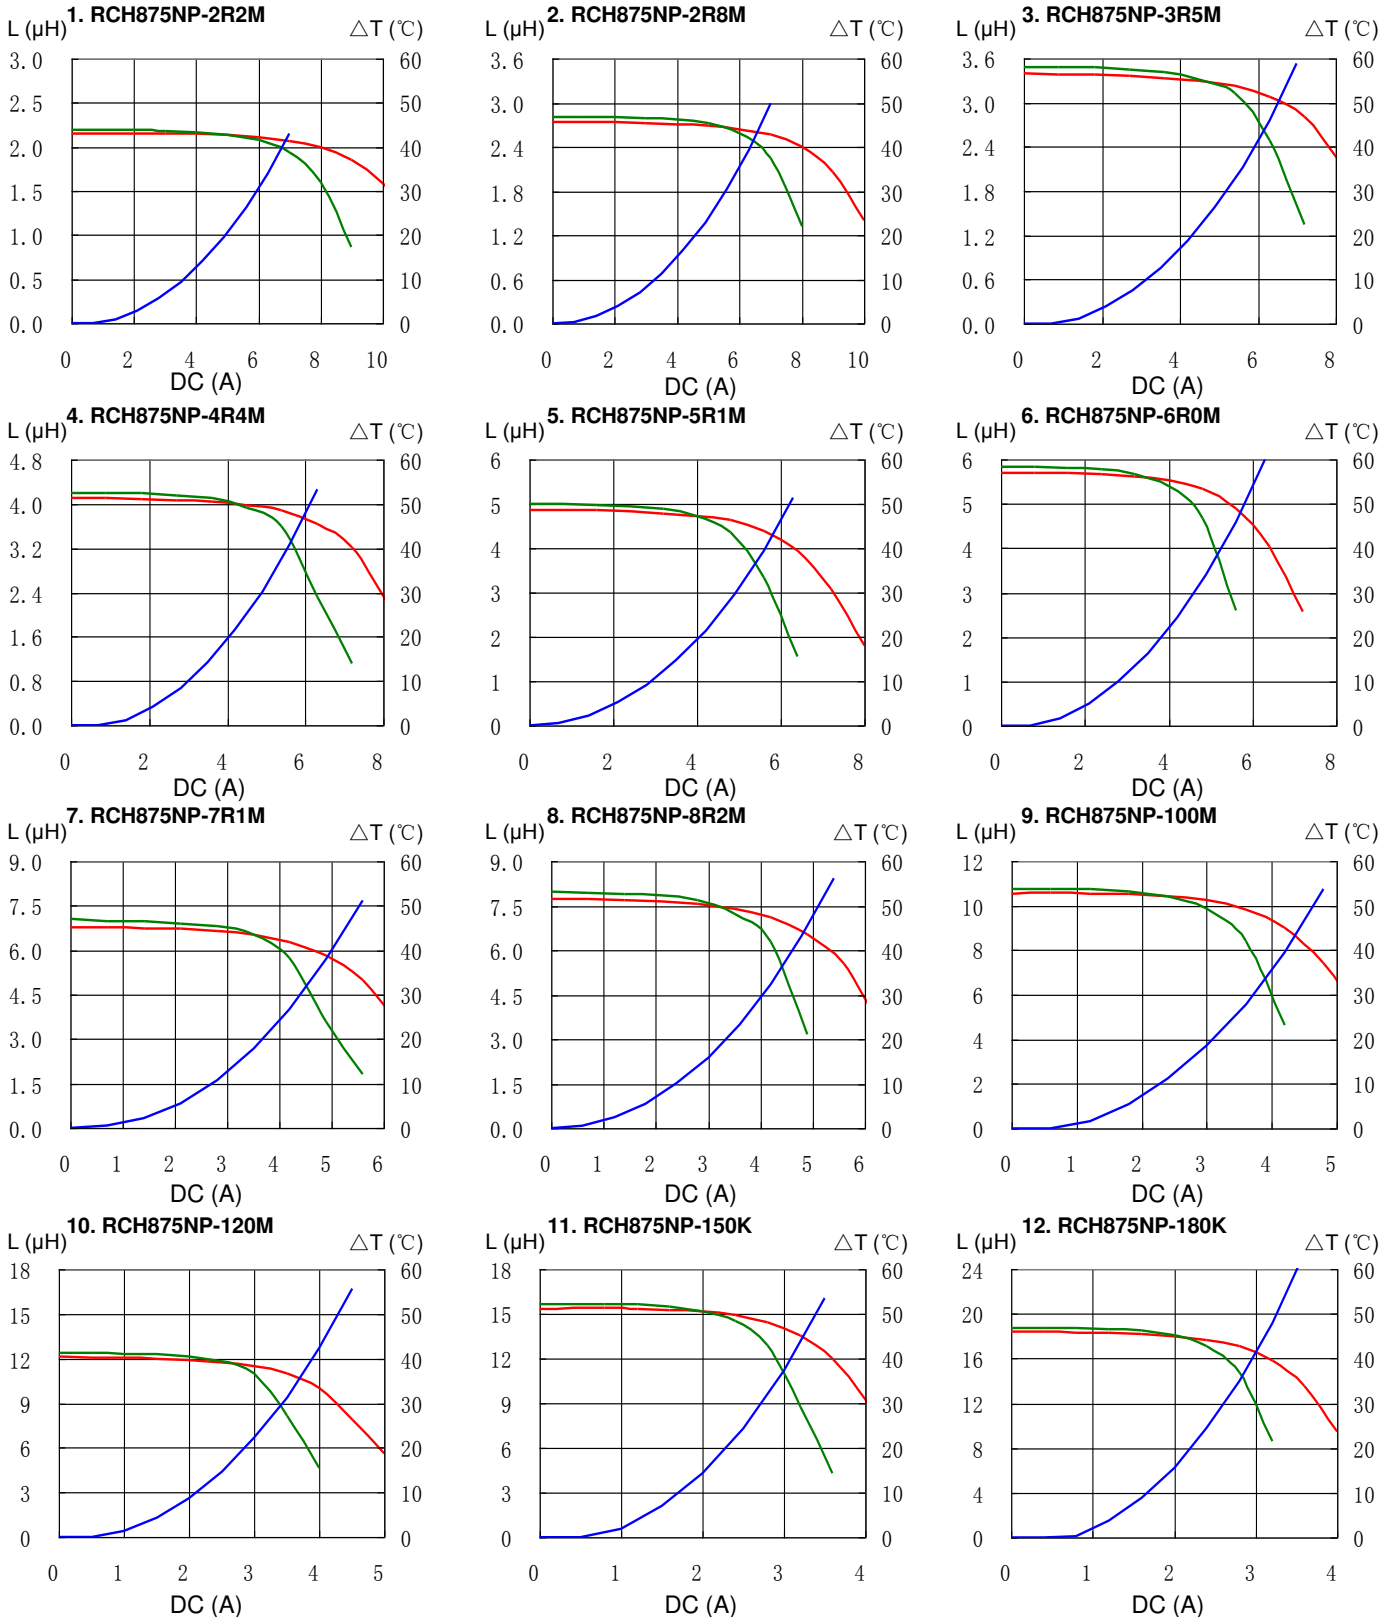


# PIN Power Inductor RCH-875



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

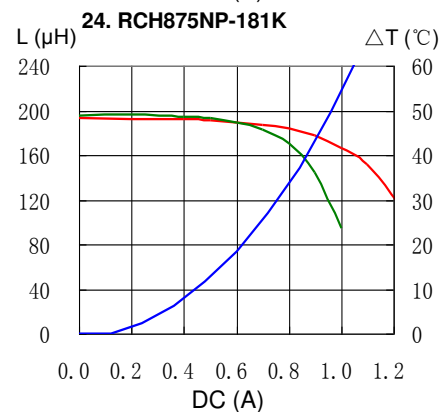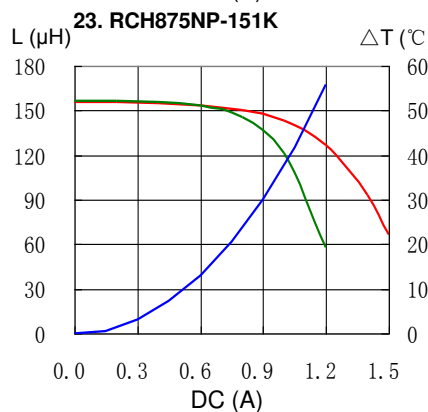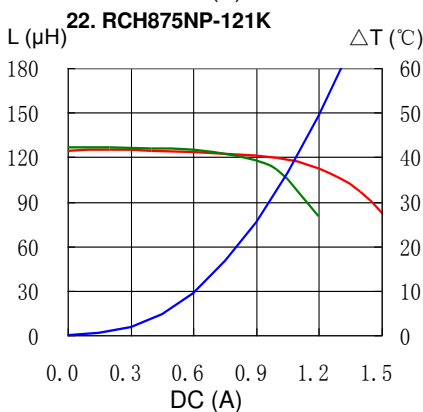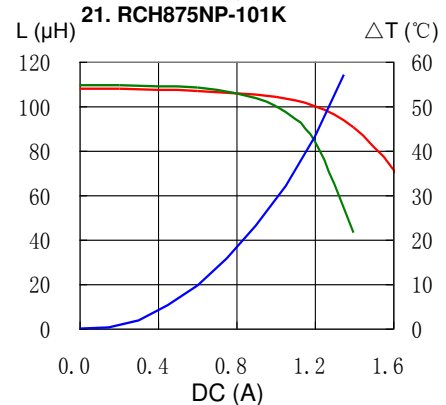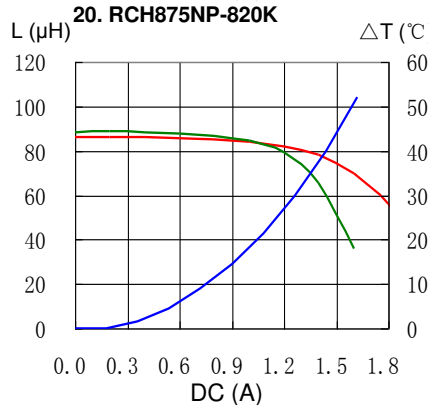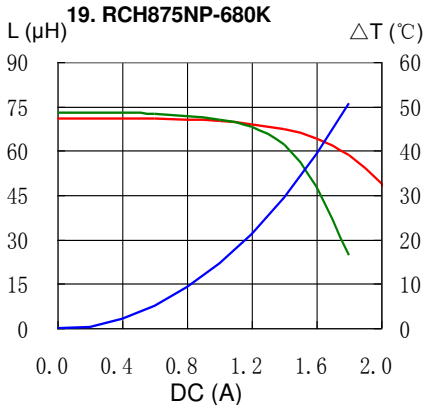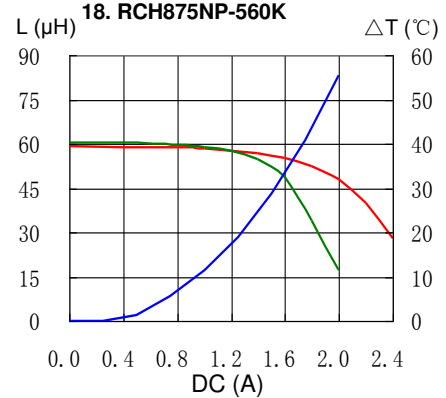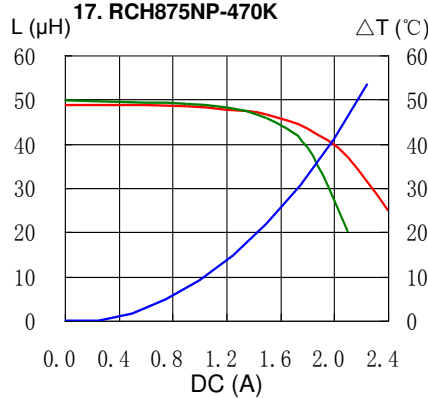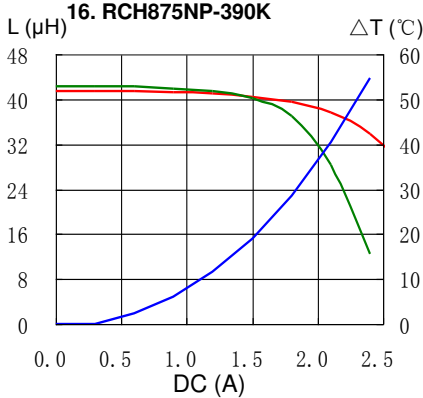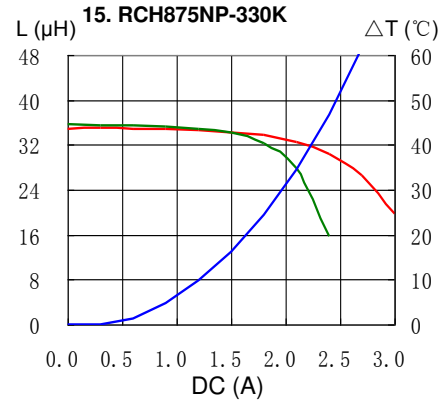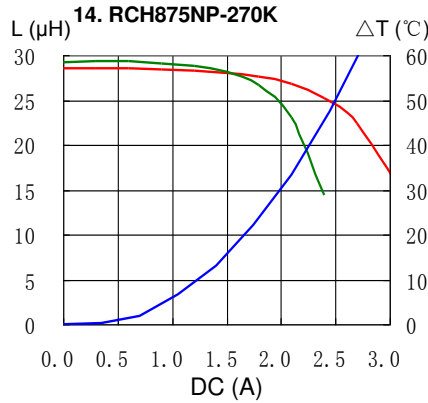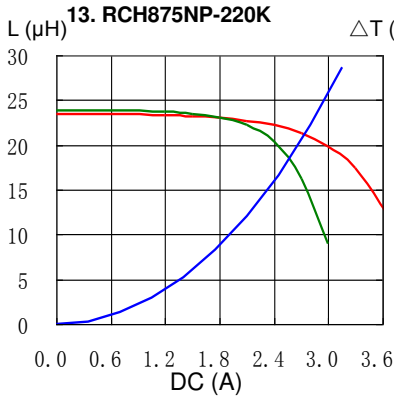












# PIN Power Inductor RCH-875



## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

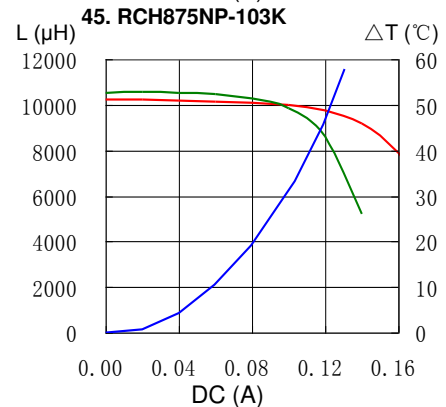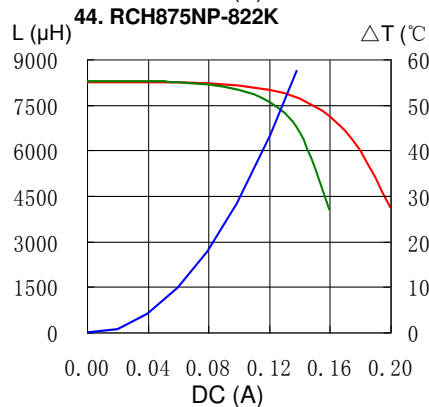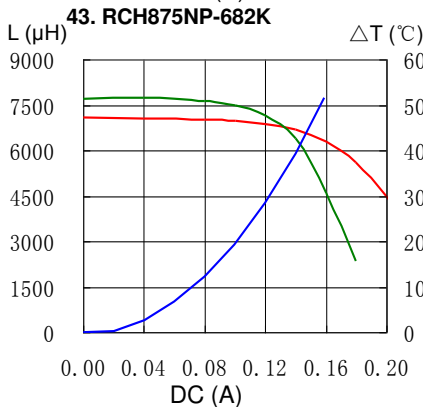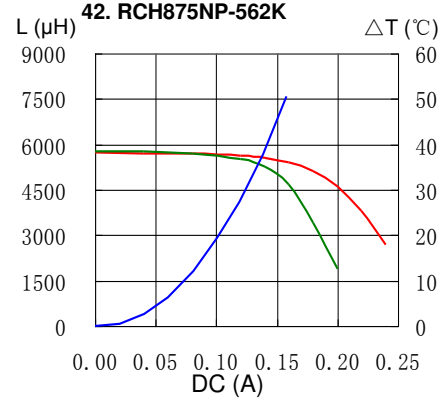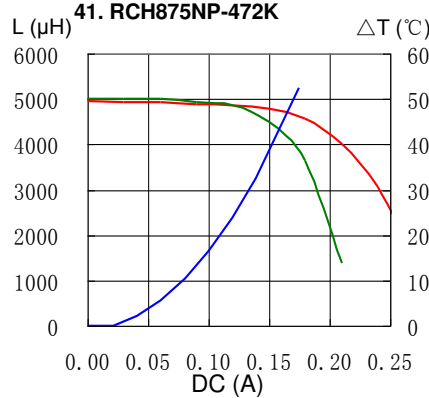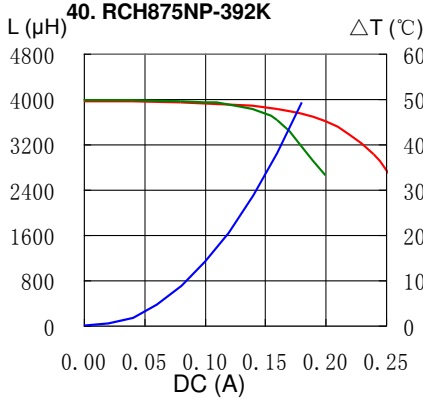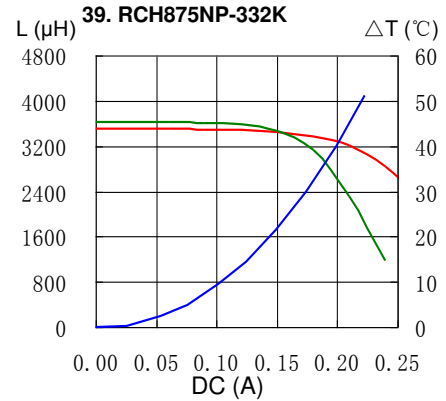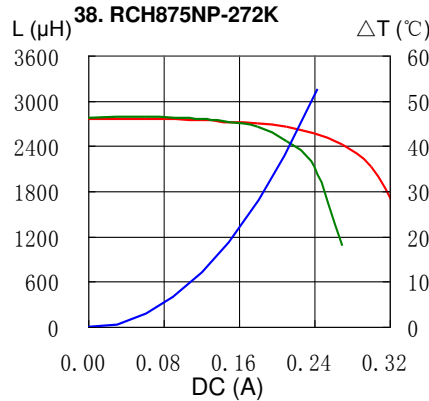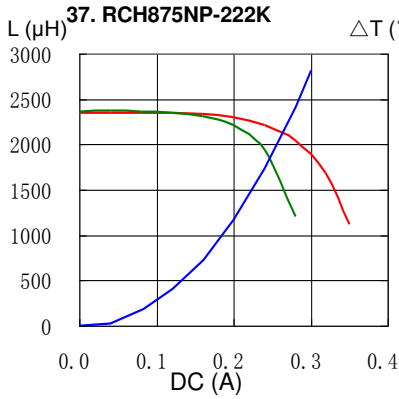

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel. +852-2880-6781  
FAX. +852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel. +81-48-691-7300  
FAX. +81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel. +1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel. +86-21-5836-3299  
FAX. +86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel. +82-2-6237-0777  
FAX. +82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel. +49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel. +86-755-8291-0228  
FAX. +86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel. +65-6296-3388  
FAX. +65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel. +49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel. +886-2-8751-2737  
FAX. +886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel. +1-408-321-9660  
FAX. +1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)