



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



STATSHIELD® METAL-IN SERIES

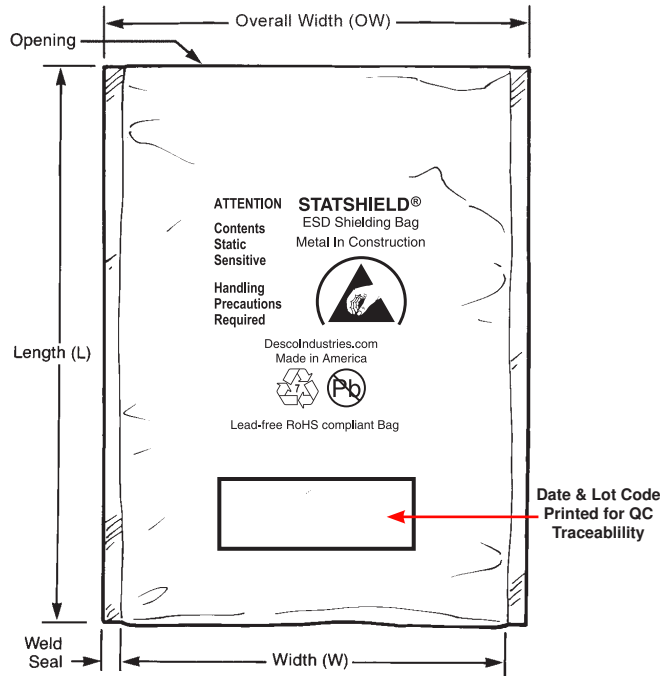

Side Weld Seals 3/8 in. (±0.10)

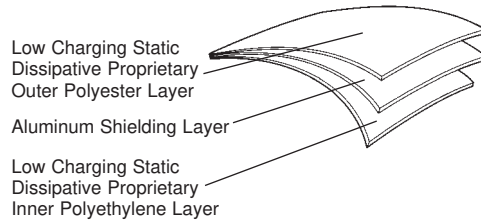

Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

Desco's bags are recyclable

Statshield® bags are packaged 100 per package in an oversized shielding bag. Shelf life of bags is minimum one year in normal indoor storage conditions.

Specifications:

Electrical Properties

Surface Resistance:
Outer Surface
Inner Surface
Static Shielding
Charge Generation

Typical Values

<10E11 ohms
<10E11 ohms
<25 nJ
Teflon: 0.09 nC/sq. in.
Quartz: 0.01 nC/sq. in.
<30 volts

Test Procedures/Method

ANSI/ESD STM11.11
ANSI/ESD STM11.11
ANSI/ESD STM11.31
Modified Incline Plane
Modified Incline Plane
ANSI/EIA-541/Appendix E, 1kV Discharge

Physical Properties

Bag Thickness:
Thickness
Width (Inside Dimensions)
Length (Inside Dimensions)
Light Transmission
Heat Seal
Tensile
Puncture Resistance
MVTR
OTR
Outgassing
Non-corrosive

Nominal .0030" (.0762mm) ±10%
Nominal -0" / +.125"
Nominal ±.125"
>40% (Tobias)
>10 lbs/in
9000 PSI
>10 lbs
<0.40
<6.1
Pass
Pass

MIL-STD-3010, 1003
ASTM D-1003
375°F, 1/2 sec 60 psi
ASTM D882
MIL-STD-3010, 2065
FTMS 101C/2065
ASTM D-1434
ASTM E595
MIL-STD-3010, M3005

Chemical Properties

Corrosion:

No effect on aluminum, copper, silver, Sn-Pb coated foil, stainless steel, low carbon steel

Polycarbonate compatible:

Contains no Amines, Amides, or N-Octanoic Acid.

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

ANSI/ESD S541 Section 6.2 Outside an EPA

"Transportation of sensitive products outside of an EPA shall require packaging that provides:

1. Low charge generation
2. Dissipative or conductive materials for intimate contact
3. A structure that provides electrostatic discharge shielding."

RoHS and REACH Compliance Statement

None of the RoHS restricted materials or REACH substances of very high concern are intentionally added in manufacturing this product. Ref: Directive 2002/95/EC Article 4.1. and Regulation (EC) No. 1907/2006. See Desco Industries Inc. Limited Warranty at Desco.com.

The bag's material meets the required limits of ANSI/ESD S541 per ANSI/ESD S20.20.

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.



*Made in the United States of America

Specifications and procedures subject to change without notice.

*Film made in USA or Malaysia

STATSHIELD® BAG, SHIELDING, METAL-IN CONSTRUCTION, .0030" (.0762mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: Desco.com
PHONE (909) 627-8178 FAX (909) 627-7449

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370 FAX (781) 575-0172

DRAWING NUMBER
13405

DATE:
October
2011

DESCO