# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





RFM products are now Murata products.

#### Ideal Front-End Filter for Domestic Wireless Receivers

- · Low-Loss, Coupled-Resonator Quartz Design
- Simple External Impedance Matching
- Complies with Directive 2002/95/EC (RoHS)

The RF3210D is a low-loss, compact, and economical surface-acoustic-wave (SAW) filter designed to provide front-end selectivity in 303.825 MHz receivers. Receiver designs using this filter include superheterodyne with 10.7 MHz or lower IF frequencies, direct conversion receivers and superregenerative receivers.

This coupled-resonator filter (CRF) uses selective null placement to provide suppression, typically greater than 40 dB, of the LO and image spurious responses of superhet receivers with 10.7 MHz IF. Murata's advanced SAW design and fabrication technology is utilized to achieve high performance and very low loss with simple external impedance matching.

## **RF3210D**

## 303.825 MHz **SAW** Filter



3.8 x 3.8

Characteristic		Sym	Notes	Minimum	Typical	Maximum	Units
Center Frequency @ 25°C		f <sub>C</sub>	1, 2, 3		303.825		MHz
Minimum Insertion Loss, 303.620 to 303.980 MHz		IL <sub>MIN</sub>	1, 3		1.6	2.5	dB
Passband Loss Relative to IL <sub>MIN</sub> :							
303.595 to 304.025 MHz			1		1.0	3.0	dB
303.535 to 304.085 MHz	303.535 to 304.085 MHz				1.5	6.0	
3 dB Bandwidth		BW <sub>3</sub>	1, 3	500	650	800	kHz
Attenuation Relative to IL <sub>MIN</sub>	:						
10 to 260 MHz				45	55		
260 to 297 MHz			1	35	45		- dB
297 to 302.5 MHz				11.5	15		
304.8 to 320 MHz				14	20		
320 to 400 MHz				37	40		
400 to 1000 MHz				45	55		
Frequency Temperature Coefficient		FTC			0.032		ppm/°C <sup>2</sup>
Frequency Aging, Absolute Value During the First Year		fA			≤10		ppm/yr
Impedance @ F <sub>C</sub>	Input Z <sub>IN</sub> =R <sub>IN</sub> IIC <sub>IN</sub>	Z <sub>IN</sub>	1	11.7 KΩ II 1.8 pF			
	Output Z <sub>OUT</sub> =R <sub>OUT</sub> IIC <sub>OUT</sub>	Z <sub>OUT</sub>	1	6.63 KΩ II 2.2 pF			
Lid Symbolization (Y=year WW=week D=day of week)				675 // YWWS			
Standard Reel Quantity	Reel Size 7 Inch		9	500 Pieces/Reel			
	Reel Size 13 Inch			3000 Pieces/Reel			

### CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.


#### NOTES:

- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture which is connected to a 50 Ω test system with VSWR < 1.2:1. The 1. test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, fc. Note that insertion loss and bandwidth and passband shape are dependent on the impedance matching component values and quality.
- The frequency  $f_c$  is defined as the midpoint between the 3 dB frequencies. 2.
- 3. 4.
- Where noted specifications apply over the entire specified operating temperature range of -40 °C to +90 °C. The turnover temperature,  $T_{O}$ , is the temperature of maximum (or turnover) frequency,  $f_{o}$ . The nominal frequency at any case temperature,  $T_{c}$ , may be calculated from:
- $f = f_0 [1 FTC (T_0 T_0)^2]$ . Frequency aging is the change in fc with time and is specified at +65 °C or less. Aging may exceed the specification for prolonged temperatures above +65 °C. Typically, aging is greatest the first year after manufacture, decreasing significantly in subsequent years. 5.
- 6.
- 7
- The design, manufacturing process, and specifications of this device are subject to change without notice. One or more of the following U.S. Patents apply: 4,54,488, 4,616,197, and others pending. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale. Tape and Reel Standard Per ANS//EIA 481. 8 9
- This product complies with directive 2002/95/EC of the European Parlament and of the Council of 27 January 2003 on the restriction of the use of certain hazardous 10 substances in electrical and electronic equipment


Rating	Value	Units
Input Power Level	10	dBm
DC Voltage	12	VDC
Storage Temperature	-40 to +125	°C
Operable Temperature Range	-40 to +125	°C
Soldering Temperature, 10 seconds / 5 cycles maximum	260	°C

#### **Electrical Connections**

Pin	Connection			
1	Input			
2	Input Ground			
3	Ground			
4	Case Ground			
5	Output			
6	Output Ground			
7	Ground			
8	Case Ground			

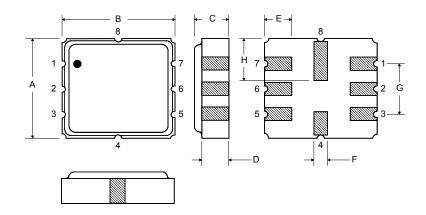

#### Matching Circuit to 50 $\boldsymbol{\Omega}$

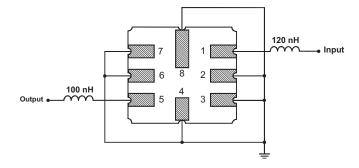

#### **Optional Electrical Connections**

Pin	Connection		
1	Input Ground		
2	Input		
3	Ground		
4	Case Ground		
5	Output Ground		
6	Output		
7	Ground		
8	Case Ground		

#### **Case Dimensions**

Dimension	mm			Inches			
	Min	Nom	Max	Min	Nom	Max	
Α	3.6	3.8	4.0	0.14	0.15	0.16	
В	3.6	3.8	4.0	0.14	0.15	0.16	
С	1.00	1.20	1.40	0.04	0.05	0.055	
D	0.95	1.10	1.25	0.033	0.043	0.05	
E	0.90	1.0	1.10	0.035	0.04	0.043	
F	0.50	0.6	0.70	0.020	0.024	0.028	
G	2.39	2.54	2.69	0.090	0.100	0.110	
Н	1.40	1.75	2.05	0.055	0.069	0.080	

#### Optional Matching Circuit to 50 $\Omega$

