



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## *BlueSentry-XPert* Bluetooth<sup>TM</sup> Sensor Interface

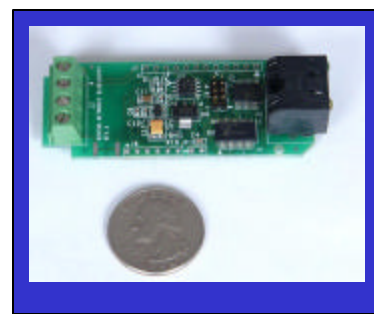
*Roving Networks, a developer of wireless network appliances, introduces the BlueSentry Bluetooth sensor interface. BlueSentry connects to many industry standard sensors to provide wireless, network connected signal monitoring and device control in industrial and commercial environments..*

### True Plug-and-play

About the size of a standard business card, and less than 1" thick, *BlueSentry-AD* easily attaches to sensor outputs, automatically taking continuous measurements. Data is transferred wirelessly to PC and PDA clients using Serial Port Profile. Or pair the BlueSentry with the BluePort II or XP serial adapter and connect to any legacy serial port! Software applications can control and acquire data as if they were connected to a local serial port.

### Easy to setup and use

*BlueSentry* contains a built in processor and smart Bluetooth radio. The device is programmed over Bluetooth via simple ASCII characters. Both ASCII and binary output formats are supported. Channels can be selected as single ended or differential measurements.

**RN-800S-AD****RN-800S-CB**

## Features and Specifications

- 8 16 bit Input A/D channels 0-5VDC at up to 3000Hz sample rate.
- 2 on board FET switches for powering external sensors.
- 2 general purpose inputs/outputs (15ma drive) for control.
- High Power (Class 1 - 16db TX) – 100Meter Bluetooth<sup>TM</sup> radio with integral chip antennae.
- External SMA jack Antennae option, order **RN-800S-E**.
- Low power 6-12VDC (75ma) can run from 4-AAA batteries.
- Serial Port Profile enabled, slave or master mode capable.
- Low power sleep and wake on connect options.
- screw post (power in, 2 ch), RJ45 (power in, 6 ch) and 12 pin internal header connections.
- Small form factor: 1.6" X 3.0" X 0.9"