



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Series B2C/S2C 3.50 - 2-row**  
**S2CD-THR 3.50/24/90LF 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

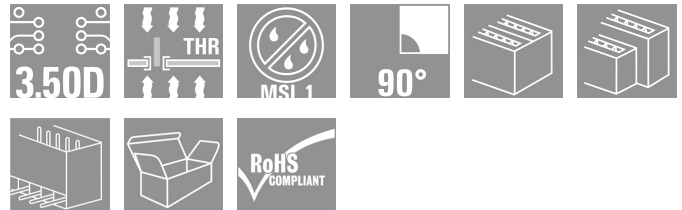

**The new benchmark for component density: the virtual 0.875mm pitch - for 1mm<sup>2</sup> I/O connections**

The only 4-row double level male connectors for standard IP20 sensor interfaces with 3.5 pitch

The S2L in a double pack - a standard has surpassed itself:

- Each 3.5mm wide, 4 I/O contacts for 1mm<sup>2</sup> connection cross-section
- Force-fit enclosure geometry guarantees maximum stability
- Solder flange eliminates the need for a screw fastening

Less is more - basic advantages for your applications:

- 75% space savings on the circuit board
- Solder flange reduces process costs
- Less mechanical load on the soldering points
- More space for displays in the front panel, for example

A "small" contribution to greater competitiveness: additional features in the same installation space or a more compact device with the same range of functions.

**General ordering data**

Order No.	<a href="#">1357940000</a>
Type	S2CD-THR 3.50/24/90LF 3.2SN BK BX
Version	PCB plug-in connector, closed side / solder flange, Reflow solder connection, 3.50 mm, No. of poles: 24, 90°, Solder pin length (l): 3.2 mm, Black
GTIN (EAN)	4050118160901
Qty.	20 pc(s).
Product data	IEC: 200 V / 7.9 A UL: 150 V / 7 A

**Series B2C/S2C 3.50 - 2-row**  
**S2CD-THR 3.50/24/90LF 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Technical data**
**Dimensions**

Net weight 0 g

**System parameters**

Product family		Series B2C/S2C 3.50 - 2-row		Mounting onto the PCB	
Outgoing elbow	90°	Pitch in mm (P)	3.5 mm	Reflow solder connection	
Pitch in inches (P)	0.138 inch	No. of poles	24		
Solder pin length (l)	3.2 mm	Can be coded	Yes		
Number of solder pins per pole	1	Solder eyelet hole diameter (D)	1.3 mm		
Solder eyelet hole diameter tolerance (D)+	0,1 mm	L1 in mm	17.5 mm		
L1 in inches	0.689 inch	Touch-safe protection acc. to DIN VDE 0470	IP 20		
Touch-safe protection acc. to DIN VDE 57 106	Safe from finger touch				

**Material data**

Insulating material	LCP GF	Colour	Black
Insulating material group	IIIb	CTI	≥ 175
Continuous operating temp., min.	-25 °C	Continuous operating temp., max.	120 °C

**DIN IEC rating data**

Rated current, min. no. of poles (Tu=20°C)	7.9 A	Rated current, max. no. of poles (Tu=20°C)	5 A
Rated current, number of poles (Tu=40°C), min	6.8 A	Rated current, number of poles (Tu=40°C), max.	5 A
Rated voltage for surge voltage class / pollution degree III/3	100 V	Rated impulse voltage for surge voltage class/ contamination degree III/3	1.5 kV
Rated voltage for surge voltage class / pollution degree III/2	160 V	Rated impulse voltage for surge voltage class/ pollution degree III/2	2.5 kV
Rated voltage for surge voltage class / pollution degree II/2	200 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	2.5 kV

**CSA rating data**

Rated voltage (Use group B)	50 V	Rated current (use group B)	5 A
-----------------------------	------	-----------------------------	-----

**UL 1059 rating data**

Rated voltage (use group B)	150 V	Rated current (use group B)	7 A
-----------------------------	-------	-----------------------------	-----

**Classifications**

eClass 6.0 27-26-07-04

**Notes**

Notes

**Series B2C/S2C 3.50 - 2-row**  
**S2CD-THR 3.50/24/90LF 3.2SN BK BX**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 16  
 D-32758 Detmold  
 Germany  
 Fon: +49 5231 14-0  
 Fax: +49 5231 14-292083  
 www.weidmueller.com

**Drawings**

