



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SB72

2-Port Serial to Ethernet Server

301 Version



DATASHEET

Key Points

- Serial to Ethernet server
- RS-232 and RS-422/485 serial device support
- 5V tolerant input and TTL serial device support
- Works out of the box - no programming is required
- Board level product
- Customize with development kit

Features

- 10/100Mbps Ethernet
- TCP/UDP/Telnet modes
- DHCP/Static IP modes
- Web based configuration
- 32-bit performance


Optional

The following options are available with the optional development kit:

- Customize any aspect of operation including web pages, data filtering, or custom network applications
- Additional baud rates available
- SPI peripheral interface

The following optional software modules not included with kit and are sold separately:

- SNMP

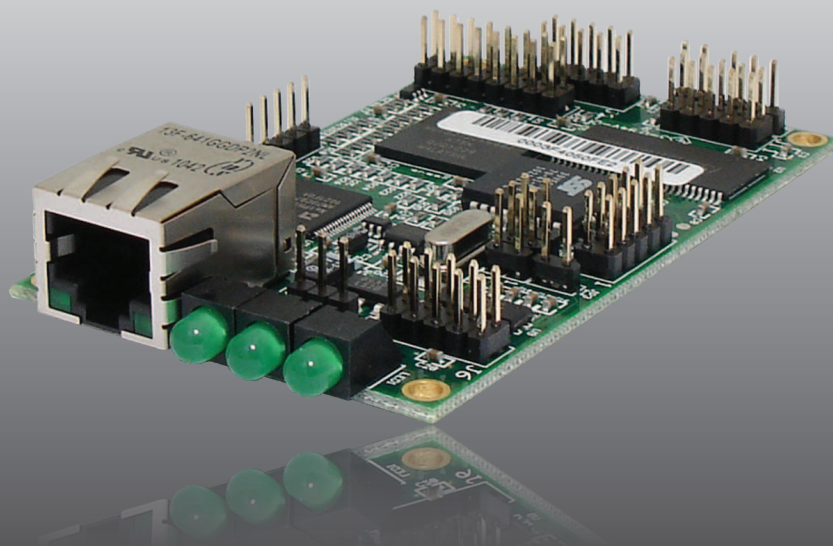

Factory Application Specifications

Serial Port Baud Rate

Factory application supports up to 115,200 baud. Custom rates available with development kit.

Serial Protocols Supported

RS-232, RS-422, RS-485 and TTL

Serial Configurations

The two UARTs can be configured in the following ways:

- Two RS-232 ports, without hardware handshaking
- One RS-232 port with hardware handshaking and one RS-485/422 port
- Two TTL ports
- One TTL port and one RS-232 port
- One TTL port and one RS-485/422 port

Hardware Specifications

Processor and Memory

32-bit Freescale ColdFire 5272 running at 62.5MHz with 512KB of flash and 8MB of SDRAM.

Network Interface

10/100 BaseT with RJ-45 connector

Data I/O Interface

- Two UARTs
- SPI peripheral interface

LEDs

Auto-negotiation (off/on), speed (10/100), power (off/on)

Physical Characteristics

Dimensions (inches): 3.25" x 2.00"

Weight: 1.1 oz.

Mounting Holes: 4

Power

DC Input Voltage: 5V @480mA

Environmental Operating Temperature

0° to 70° C (SB72-301CR)

-40° to 85° C (SB72-301IR)

RoHS Compliance

The Restriction of Hazardous Substances guidelines ensure that electronics are manufactured with fewer environment harming materials.

Connector Interface Description and Pinouts

Table 1: Connector Description

Connector	Description
J1	Factory test connector
J2	RS-485, 10-pin dual row header
J3	Factory test connector
J4	SPI Interface, single row 5 pin header (SPI requires development kit)
J5	TTL, 10-pin dual row header
J6	RS-232, 10-pin dual row header
J7	Ethernet, RJ-45 connector
J8	5V Power, 3-pin single row header
JP1-JP5	Configuration jumpers

Note:

1. Please see Users Manual for jumper configuration instructions.

Table 2: Serial Port Connector (J2 for RS-485) Pinout and Signal Description¹

Pin	Function	Description	Max Voltage
1	FD RX-	Full Duplex Recieve -	RS-422/485
2	GND	Ground	
3	FD RX+	Full Duplex Recieve +	RS-422/485
4	GND	Ground	
5	VCC 5V	Input Voltage 5VDC ¹	RS-422/485
6	GND	Ground	
7	FD TX+ / HD+	Full Duplex Transmit+ / Half Duplex +	RS-422/485
8	GND	Ground	
9	FD TX- / HD-	Full Duplex Transmit - / Half Duplex -	RS-422/485
10	GND	Ground	

Note:

1. The RS-485 interface supports 4-wire full duplex (FD), and 2-wire half duplex (HD). Note that jumpers JP1 – JP5 must be configured correctly to FD or HD mode.

Table 3: SPI Connector (J4) Pinout and Signal Description

Pin	Function	Description	Max Voltage
1	GND	Ground	
2	DOUT	Data Out	5VDC
3	CLK	Clock	5VDC
4	DIN	Data In	5VDC
5	/SPI_CS3	SPI Chip Select 3 (Active low)	5VDC

Table 4: Serial Port Connector (J5 for TTL) Pinout and Signal Description

Pin	CPU Pin	Function 1	Function 2	Description	Max Voltage
1		GND		Ground	
2	K2	UART1_CTS	SPI_CS2	UART 1 Clear to Send or SPI Chip Select 2	5VDC
3	K4	UART1_TX	T0OUT	UART 1 Transmit or Timer Output 0	5VDC
4	K1	UART1_RX	T0IN	UART 1 Recieve or Timer Input 0	5VDC
5	K3	UART1_RTS	INT5	UART 1 Request to Send or External Interrupt 5	5VDC
6	H3	UART0_RTS	PB3	UART 0 Request to Send	5VDC
7	H2	UART0_CTS	PB2	UART 0 Clear to Send	5VDC
8	H4	UART0_TX	PB0	UART 0 Transmit	5VDC
9		VCC5V		Input voltage 5VDC ¹	5VDC
10	H1	UART0_RX	PB1	UART 0 Receive	5VDC

Note:

Pin 9 is a 5V DC input, which allows for a single connector interface with TTL serial and power to the board.

Table 5: Serial Port Connector (J6 for RS-232) Pinout and Signal Description

Pin	CPU Pin	Function 1	Function 2	Description	Max Voltage
1		NC		No Connect	
2		Short to 7			
3	K1	UART1_RX	T0IN	UART 1 Recieve or Timer Input 0	RS-232
4	K3	UART1_RTS	UART0_TX	UART 1 Request to Send or UART 0 Transmit	RS-232
5	K4	UART1_TX	T0OUT	UART 1 Transmit or Timer Output 0	RS-232
6	K2	UART1_CTS	UART0_RX	UART 1 Clear to Send or UART 0 Recieve	RS-232
7		Short to 2			
8		NC		No Connect	
9		GND		Ground	
10		NC		No Connect	

Note:

1. This connector provides RS-232 level signals for Channel 0 and Channel 1, or RS-232 levels with hardware handshaking for Channel 2.
2. If your application requires a null modem adapter, wiring information is provided in the “RS-232 NULL Modem Wiring” section of the Users Manual.


Table 6: Power Connector (J8) Pinout and Signal Description

Pin	Function	Description
1	VCC5V	Input voltage 5VDC
2	GND	Ground
3	VCC5V	Input voltage 5VDC

Note:

1. PCB Revision 1.3 and Higher

SB72 Connector Diagram

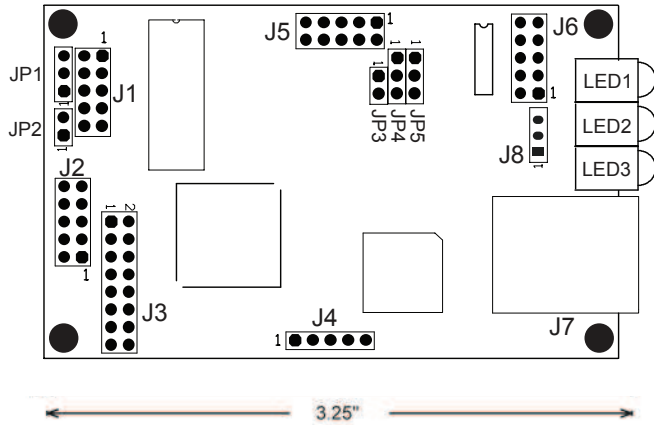

Part Numbers

SB72 Development Kit

Part Number: NNDK-SB72-KIT

Kit includes all the hardware and software you need to customize the included platform hardware. See NetBurner Store product page for package contents.

SB72 2-Port Serial to Ethernet Server (Commercial Temperature Version)

Part Number: SB72-301CR

SB72 2-Port Serial to Ethernet Server (Industrial Temperature Version)

Part Number: SB72-301IR

SNMP V1 (Module License Version)

Part Number: NBLIC-SNMP

Available as an option if you are using a development kit.

Ordering Information

E-mail: sales@netburner.com

Online Store: www.NetBurner.com

Telephone: 1-800-695-6828