

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








MALLORY Mallory Sonalert Products Inc. Sales Outline Drawing Part # SBM428R Revision A

Specifications:

Sound level Category	Medium Sound Level
Mode of Operation	Continuous tone
Mounting	Printed Circuit Board (see note B)
Voltage Rating	4 - 28 Vdc
Frequency	2900 Hz ±500 Hz
Loudness (Min. Voltage)	64 dB(A) min. @ 2 FT and 4 Vdc
Loudness (Max Voltage)	78 dB(A) min. @ 2FT and 28 Vdc
Current Draw	3 mA Max @ 4 Vdc
Current Draw	16 mA Max @ 28 Vdc
Storage Temperature	-40°C to +85°C
Operating Temperature	-30°C to +65°C
Weight (Typical)	0.6 oz (17 g)
Housing	6/6 Nylon, Color Black
Options	For other options contact factory

Dimensions: Inches (mm)

UL Recognized ROHS Compliant

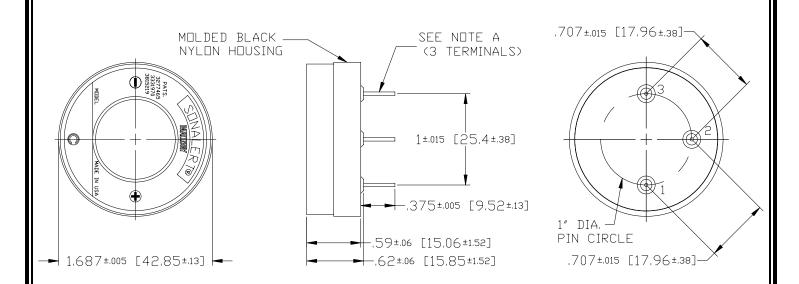

NOTE A:

TERMINALS - .031" DIA. SOLDER COATED COPPER-CLAD

STEEL. TERMINAL 1 IS POSITIVE, TERMINAL 3 IS

NEGATIVE. TERMINAL 2 IS FOR SUPPORT ONLY - NO
ELECTRICAL CONNECTION.

NOTE B:

MOUNTING - INSERT INTO PRINTED CIRCUIT
BOARD AND HAND OR MACHINE SOLDER.