

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










SE-EPI-06 MANUAL ENERGIZED PHASE INDICATOR

March 9, 2012

REVISION 3

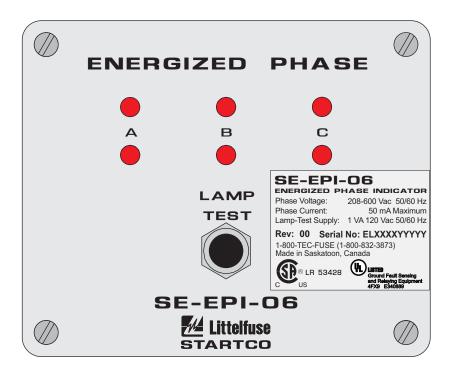

Copyright © 2012 by Littelfuse Startco

All rights reserved.

Publication: SE-EPI-06-M Document: S95-EPI0-00000

Printed in Canada



TABLE OF CONTENTS

Taki	le of Contents	PAGE :
	of Figures	
1.	Features	1
2.	Description	1
3.	Installation	1
4.	Technical Specifications	4

LIST OF FIGURES

FIGURE		PAGE
1.	SE-EPI-06 Outline and Mounting Details	1
2.	Connection Diagram for an	
	Ungrounded 240- to 600-V System	2
3.	Connection Diagram for Ungrounded	
	Systems above 600 V	2
4.	Connection Diagram for a	
	Resistance-Grounded System up to 600-V	3
5.	Connection Diagram for Resistance-Grounded	
	Systems above 600 V	3

DISCLAIMER

Specifications are subject to change without notice. Littelfuse Startco is not liable for contingent or consequential damages, or for expenses sustained as a result of incorrect application, incorrect adjustment, or a malfunction.



1. FEATURES

- Red LED's indicate presence of voltage to ground for each phase of a power system.
 - Redundant LED's are used for reliability.
- Pressing LAMP TEST causes all LED's to light.

NOTE: The LAMP TEST feature requires an isolated 120 Vac supply.

- Direct connection for voltages up to 600 Vac line to line.
 - Potential transformers (PT's) are required for voltages greater than 600 Vac.

2. DESCRIPTION

The SE-EPI-06 is a self-powered voltage indication system. Presence of phase-to-ground voltage is indicated by redundant LED's (two per phase). The respective LED's are on when voltage is present.

3. INSTALLATION

Outline and panel-mounting details are shown in Fig. 1. For 208- to 600-Vac systems, connect the SE-EPI-06 directly to the three-phase bus. For 208- or 240-volt installations, use terminals AL, BL, and CL. For systems above 240 V and up to 600 V, use terminals AH, BH, and CH. See Figs. 2 and 4.

For systems above 600 V, install PT's as shown in Figs. 3 and 5.

Connect terminal G and chassis-bonding terminal $(\textcircled{\oplus})$ to ground.

For LAMP TEST connect 120 Vac supply to L and G. Connection and use of LAMP TEST circuit is optional.

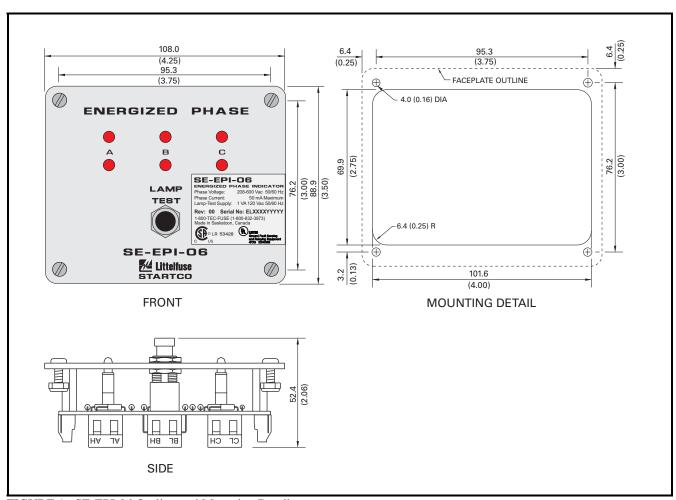


FIGURE 1. SE-EPI-06 Outline and Mounting Details.



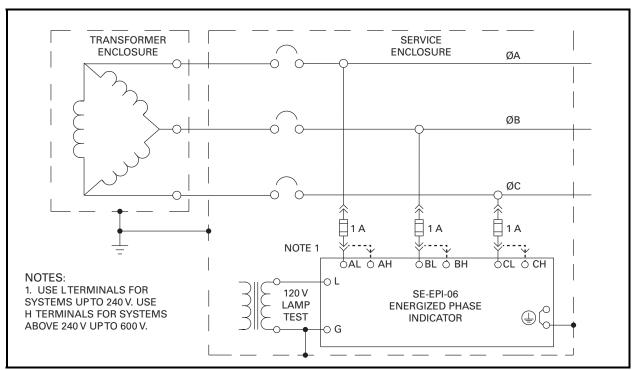


FIGURE 2. Connection Diagram for an Ungrounded 240- to 600-V System.

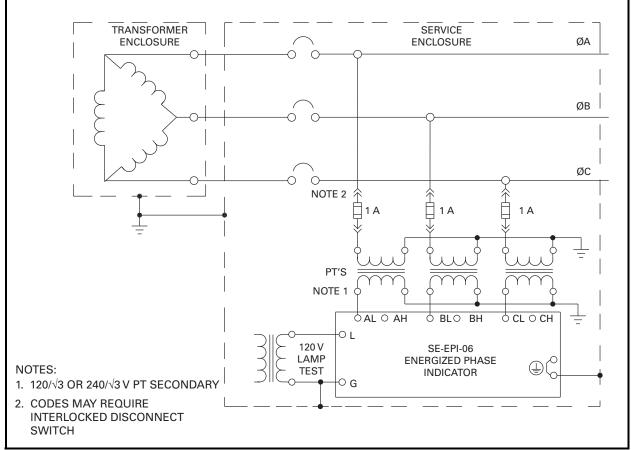


FIGURE 3. Connection Diagram for Ungrounded Systems above 600 V.



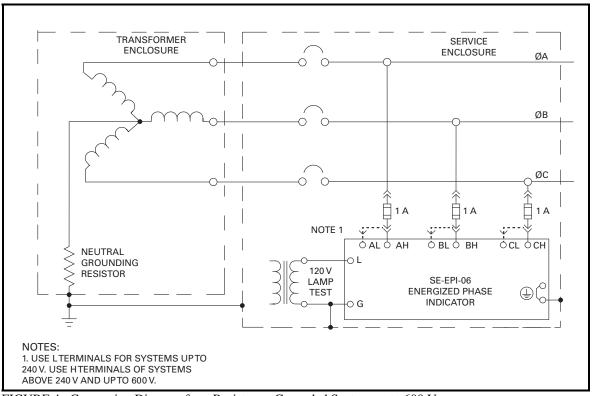


FIGURE 4. Connection Diagram for a Resistance-Grounded System up to 600 V.

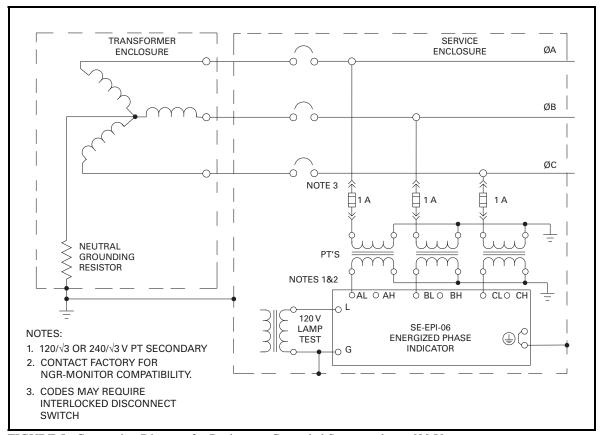


FIGURE 5. Connection Diagram for Resistance-Grounded Systems above 600 V.



4. TECHNICAL SPECIFICATIONS

Phase Voltage

Input L, maximums 240 Vac to ground,

3.5 mA

Input H, maximums......600 Vac to ground,

4.5 mA

Lamp Test Input Isolated 120 Vac,

1 VA maximum

Dielectric Strength......2,200 Vac, 1 minute

Dimensions:

Depth.....54 mm (2.1")

Environment:

Operating Temperature.....-40 to 60°C

Storage Temperature-55 to 80°C

Humidity85% Non-Condensing

PWB Conformal Coating MIL-1-46058 qualified

UL QMJU2 recognized

Certification......CSA, Canada and USA



UL Listed



Ground Fault Sensing and Relaying Equipment 4FX9 E340889