



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



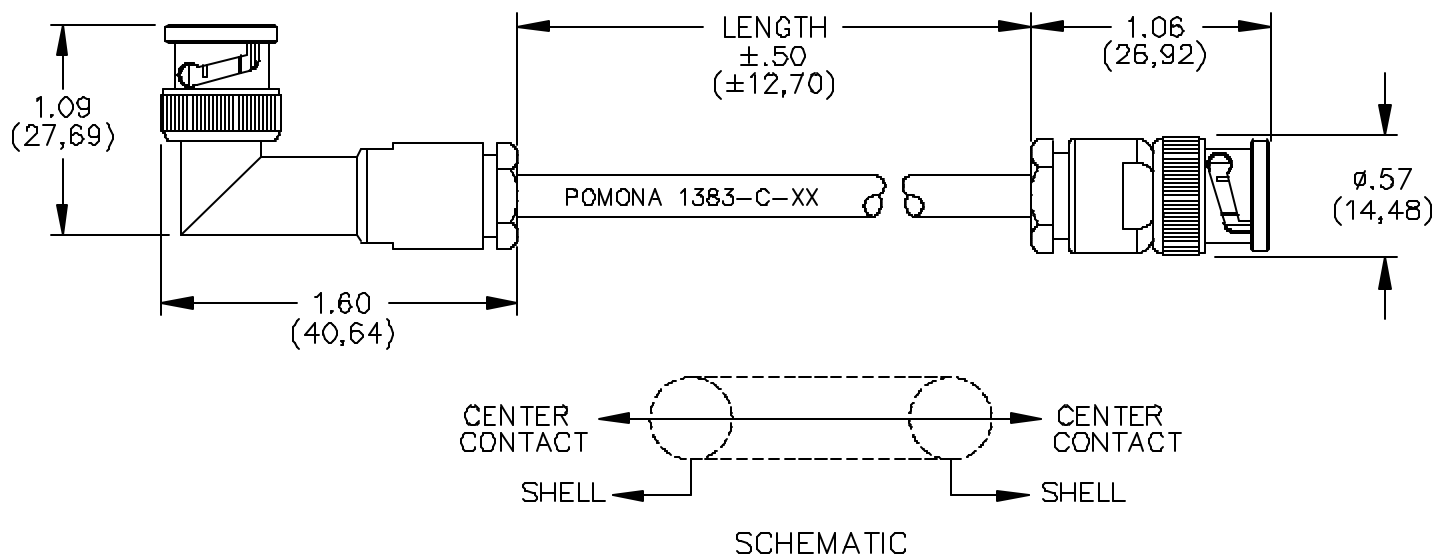

### FEATURES:

- Right Angle BNC Provided for Easy Access
- Lengths other than those specified are available upon request.

### MATERIALS:

Conn: 1<sup>st</sup> End – Right Angle BNC Male.

Body and Fittings: Tarnish Resistant.

Center Contact: Gold Plated per MIL-C-39012.

Cable: RG58C/U. (.195) O.D.

50 Ohms Impedance

Marking: "POMONA 1383-C-XX".

Conn: 2<sup>nd</sup> End-BNC Male.

Body Fittings: Non-tarnish finish.

Center Contact: Gold Plated per MIL-C-39012.

### RATINGS: Entire Assembly

Operating Temperature: +50°C. (+122°F.) Max.

Operating Voltage: Shield-Earth: 30VAC/60VDC Max.

Inner conductor-Shield: 500 VRMS Max.

### ORDERING INFORMATION: Model 1383-C-XX

XX=Cable Length, Standard Lengths: 18" (457), 24" (610), 36" (914), 48" (1219), 60" (1524)

Ordering Example: 1383-C-60 indicates 60" (1524)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ± .005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA