



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us



Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



STATFREE® ESD ULTRA CLEAR BAG

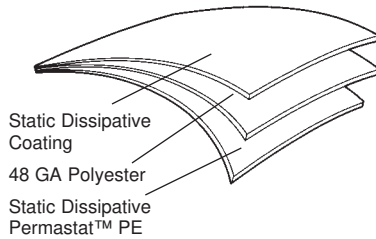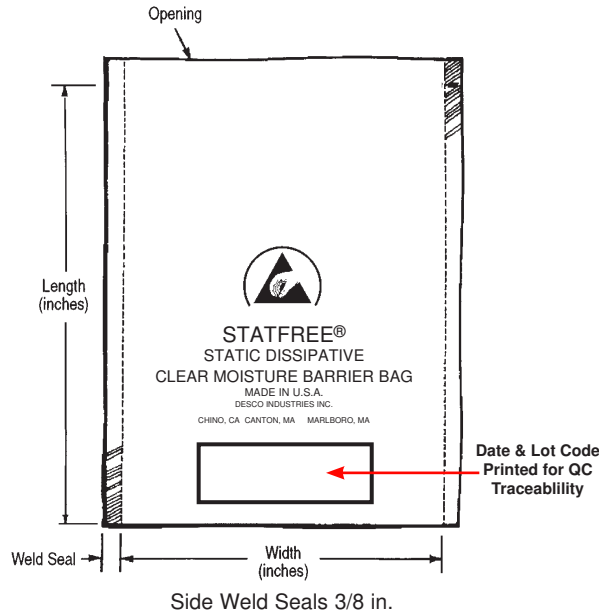

Mixed Unsortable Plastic Scrap

Mixed unsortable plastic scrap shall contain assorted plastics of multiple grades that are co-extruded, bonded or laminated together which are unsortable into individual grades

Desco's bags are recyclable

Statshield® bags are packaged 100 per package in an oversized shielding bag.
Shelf life of bags is minimum one year in normal indoor storage conditions.

Specifications:

Electrical Properties

Electrical Properties	Typical Value
Surface Resistance: (Interior and Exterior)	< 1 x 10 ¹¹ ohms
Charge Generation:	
Teflon	-0.10 (nC/in ²)
Quartz	+0.10 (nC/in ²)

Physical Properties:

Physical Properties	Typical Value	Test Procedures/Method
Thickness	Nominal .0035" (.0889mm) ±10%	MIL-STD-3010, 1003
Width (Inside Dimensions)	Nominal -0" / + .125"	
Length (Inside Dimensions)	Nominal ± .125"	
Light Transmission	>90 (%)	STM D-1003
Heat Seal	>8 (lbs/in)	375°F, .75 sec 60 psi
Tensile Strength	>5,300 (MD/TD, psi)	ASTM D-882
Puncture Res.	>25 lbs	MIL-STD-3010, 2065
MVTR	0.35	ASTM F-1249

Chemical Properties

Polycarbonate compatible: Contains no Amines, Amides, or N-Octanoic Acid.

Bag is free of amines, N-octanoic acid, silicones and heavy metals.

ANSI/ESD S541 Section 6.1 Inside an EPA

"Packaging used within an EPA (that satisfies the minimum requirements of ANSI/ESD S20.20) shall be:

- Low charge generation
- Dissipative or conductive materials for intimate contact

RoHS 2 and REACH Statement

None of the RoHS 2 restricted materials or REACH substances of very high concern as of 2012/12/19 are intentionally added in manufacturing this product. Ref: European Union Directive 2011/65/EU and Regulation (EC) No. 1907/2006/CE.

See Desco [Limited Warranty at Desco.com](http://www.desco.com/limited-warranty).

Meets ANSI/ESD S20.20 and Packaging standard ANSI/ESD S541 tested per ANSI/ESD STM11.11

Statshield® and Statfree® are Registered Trademarks of Desco Industries Inc.



Made in the
United States of America

Specifications and procedures subject to change without notice.

STATFREE® ESD ULTRA CLEAR BAG, .0035" (.0889mm)

DESCO WEST: 3651 WALNUT AVE., CHINO, CA 91710 WEB SITE: [Desco.com](http://www.Desco.com)
PHONE (909) 627-8178

DESCO EAST: ONE COLGATE WAY, CANTON, MA 02021-1407
PHONE (781) 821-8370

**DRAWING
NUMBER**
13878

DATE:
July
2013

DESCO