

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










RFM products are now Murata products.

SF2038B-2

- 76.500 MHz





Designed for SDARS IF Receiver

- · Low Insertion Loss
- 5.0 X 7.0 mm Surface-Mount Case
- Differential or Single Ended Input and Output
- Complies with Directive 2002/95/EC (RoHS)

Absolute Maximum Ratings

Rating	Value	Units		
Maximum Incident Power in Passband	+10	dBm		
Max. DC voltage between any 2 terminals	30	VDC		
Storage Temperature Range (with tape & reel)	-40 to +85	°C		
Storage Temperature Range (without tape & reel)	-50 to +125	°C		
Max Soldering Profile	265°	265°C for 10 s		

Electrical Characteristics

Sym	Notes	Min	Тур	Max	Units
f _C	1		76.500		MHz
IL	'		10.0	12.0	dB
BW ₁		12.5	14.0		MHz
BW ₁₅			16.8	18.0	MHz
BW ₃₀	1 1		18.0	19.2	MHz
			0.70	1.3	dB _{P-P}
GDV			40	150	ns _{P-P}
ction 50 to 64.44 MHz		40	46		
		36	41		
	1 , ,	30			dB
	1, 3	*30	44		ub ub
		31	44		
	<u> </u>	40	47		1
T _A	1	-40		+105	°C
FTC			-87		ppm/°C
		17	5 ohms		1
180 ohms					
	SMP-03 7 x 5 mm Nominal Footp		orint		
	l o		RFM SF2038	B YYWWS	
	IL BW ₁ BW ₁₅ BW ₃₀ GDV	f _C 1 BW ₁ BW ₁₅ BW ₃₀ 1 GDV 1, 3	fc IL IL 1 BW1 12.5 BW30 1 GDV 40 36 30 *30 *30 31 40 TA 1 FTC 17 SME SME	f _C 1 76.500 IL 10.0 10.0 BW ₁₅ 14.0 16.8 BW ₃₀ 1 18.0 GDV 40 40 40 46 36 41 30 *30 44 31 44 40 47 T _A 1 -40 -87 T75 ohms 180 ohms SMP-03 7 x 5 mm 5MP-03 7 x 5 mm	f _C 1 76.500 IL 10.0 12.0 BW ₁₅ 14.0 16.8 18.0 BW ₃₀ 1 18.0 19.2 GDV 40 150 40 46 36 41 30 *30 44 31 44 40 47 FTC -87 175 ohms 180 ohms SMP-03. 7 x 5 mm Nominal Foots

^{*}At low temperature extreme -40°C



CAUTION: Electrostatic Sensitive Device. Observe precautions for handling.

NOTES:

Unless noted otherwise, all specifications apply over the operating temperature range with filter soldered to the specified demonstration board with impedance matching to 50 Ω and measured with 50 Ω network analyzer.

Unless noted otherwise, all frequency specifications are referenced to the nominal center frequency, fc.

Rejection is measured as attenuation below the minimum IL point in the passband. Rejection in final user application is dependent on PCB layout and external impedance matching design. See Application Note No. 42 for details. "LRIP" or "L" after the part number indicates "low rate initial production" and "ENG" or "E" indicates "engineering prototypes."

The design, manufacturing process, and specifications of this filter are subject to change. Tape and Reel Standard ANSI / EIA 481.


Either Port 1 or Port 2 may be used for either input or output in the design. However, impedances and impedance matching may vary between Port 1 and Port 2, so that the filter must always be installed in one direction per the circuit design.

US and international patents may apply.

Murata, stylized Murata logo, and Murata N.A., Inc. are registered trademarks of Murata Manufacturing Co., Ltd.

Matching Circuit and Matching Component Values Used in G3 Sirius Radios

(Refer to Sirius Radio G3 Chipset Application Note, Doc. #RX000104-B, Sec. 4.2.2)

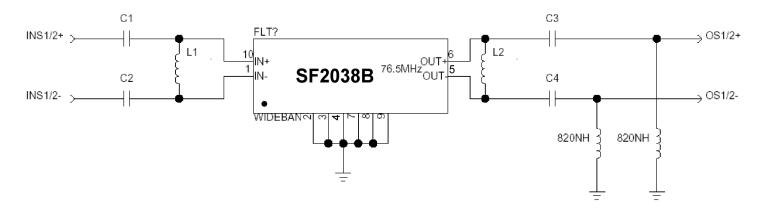


Wideband SAW Matching Circuit


Wideband SAW Matching Values


Reference Designator	Value
C1	15 pF
C2	15 pF
L1	270 nH
L2	270 nH
C3	27 pF
C4	27 pF


Matching Circuit and Matching Component Values Used on Filter Demo Board



SF2038B
76.500 MHz
C1 = 22pF
C2 = 22pF
L1 = 220nH
L2 = 270nH
C3 = 22pF
C4 = 22pF

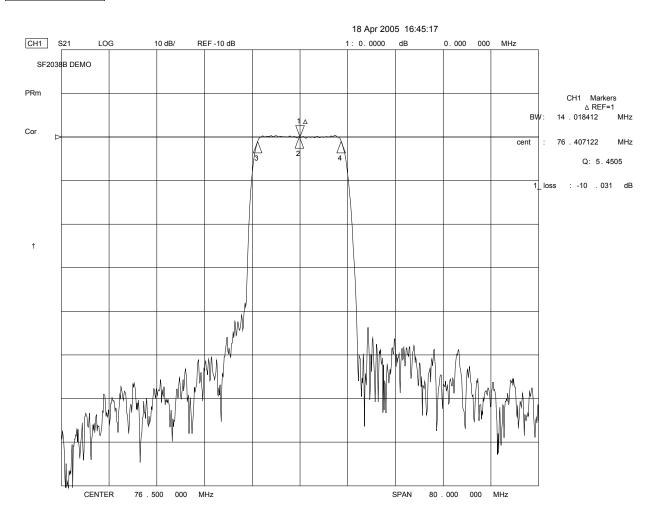


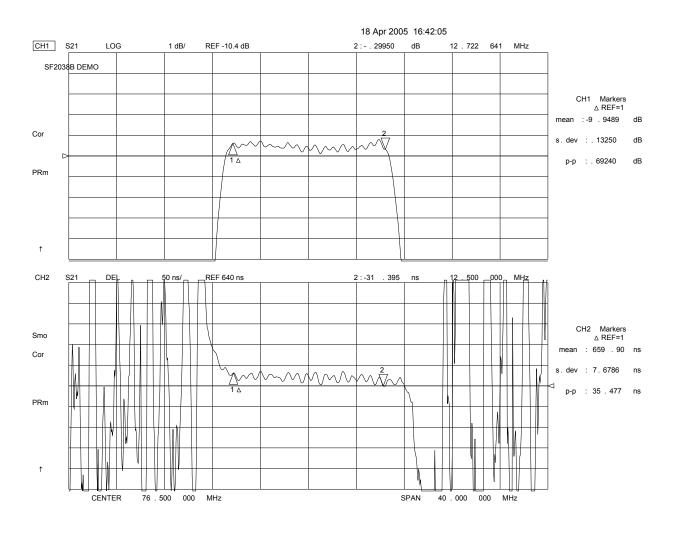

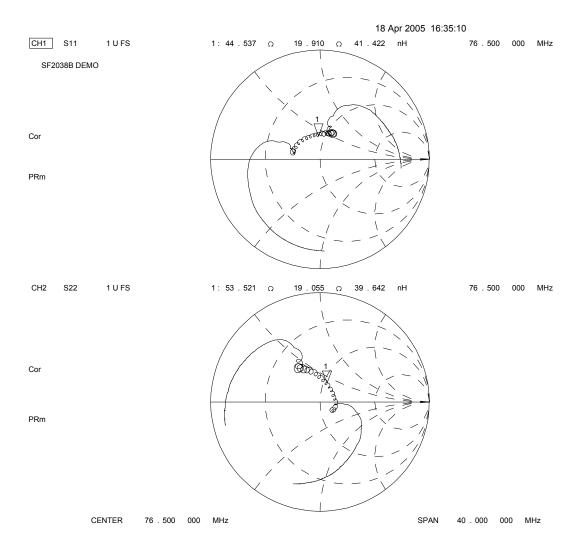


SMP-03 Case

10-Terminal Ceramic Surface-Mount Case 7 x 5 mm Nominal Footprint




Recommended PCB Footprint




Case Dimensions						
Dimension	mm		Inches			
	Min	Nom	Max	Min	Nom	Max
Α	6.80	7.00	7.20	0.268	0.276	0.283
В	4.80	5.00	5.20	0.189	0.197	0.205
С		1.65	2.00		0.065	0.079
D	.47	0.60	.73	0.019	0.024	0.029
E	2.41	2.54	2.67	0.095	0.100	0.105
Н	0.87	1.0	1.13	0.034	0.039	0.044
J	4.87	5.00	5.13	0.192	0.197	0.202
K	2.87	3.00	3.13	0.113	0.118	0.123
P	1.14	1.27	1.40	0.045	0.050	0.055

Materials				
Solder Pad	Au plating 30 - 60 ulnches (76.2-152 uM) over 80-			
Termination	200 ulnches (203-508 uM) Ni.			
Lid	Fe-Ni-Co Alloy Electroless Nickel Plate (8-11% Phos-			
	phorus) 100-200 ulnches Thick			
Body	Al ₂ O ₃ Ceramic			
Pb Free				


Electrical Connections			
	Connection	Terminals	
Port 1	Input or Return	10	
	Return or Input	1	
Port 2	Output or Return	5	
	Return or Output	6	
	Ground	All others	
Single	Single Ended Operation Return is gro		
Differential Operation		Return is hot	

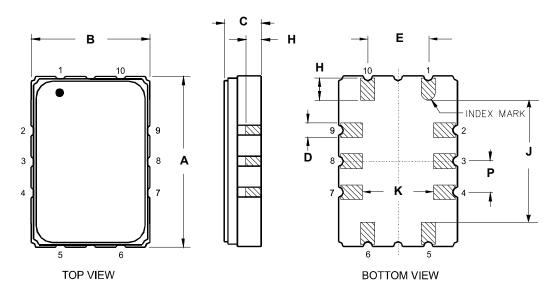

Tape and Reel Specifications

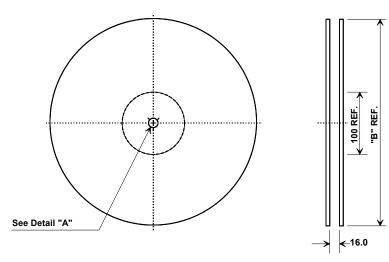

61	ъ"	Quantity Per Reel
Inches	millimeters	quantity : or recor
7	178	500
13	330	2000



COMPONENT ORIENTATION and DIMENSIONS

Carrier Tape Dimensions			
Ao	5.5 mm		
Во	7.5 mm		
Ко	2.0 mm		
Pitch	8.0 mm		
W	16.0 mm		

