



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Barrier & Dead Front Terminal Blocks

Series 14002 & 14004

Barrier Terminal Blocks

Inches (Millimeters)

Series 14002

SPECIFICATIONS

Ratings: 115A, 600V; UL/CSA

Poles: 2 to 6 poles

Wire sizes: #2 – #14 CU/#8 AL

Operating temperature: 150°C

Marking: Marking strip optional, consult factory.

Options: CP = Pressure plate, rated 60A, 600V

Q = Quick-Connect, rated 50A, 600V

To order options, enter letter code


in front of Part No.: ie; CP14002-2

Agency approvals: UL E62622; CSA LR15364;

CE Pending



14002-2

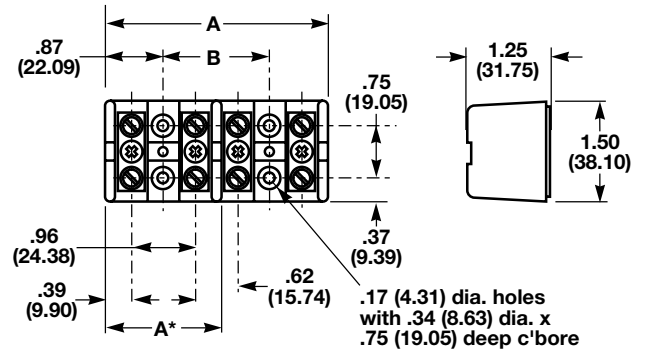

Part Number	A	B
14002-2	1.75	–
14002-3	2.37	–
14002-4	3.34	1.59
14002-5	3.96	2.21
14002-6	4.59	2.84

Note: "A" dimension for 14002-2 & 14002-3 only.
(14002-2 & 14002-3 have only two mounting holes.)

Dead Front Terminal Blocks

Inches (Millimeters)

Series 14004

SPECIFICATIONS

Ratings: 90A, 600V; UL/CSA

Poles: 2 to 12 poles

Wire sizes: #4 – #14 CU/#8AL


Operating temperature: 75°C

Marking: Marking strip optional, consult factory.

Agency approvals: UL E62622; CSA LR15364



14004-4

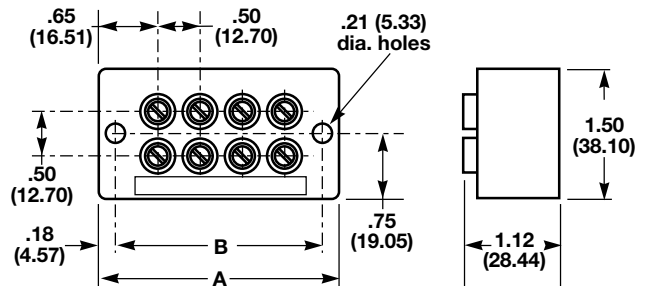

Part Number	A	B
14004-2	1.81	1.43
14004-3	2.31	1.93
14004-4	2.81	2.43
14004-5	3.31	2.93
14004-6	3.81	3.43
14004-7	4.31	3.93
14004-8	4.81	4.93
14004-9	5.31	4.93
14004-10	5.81	5.43
14004-11	6.31	5.93
14004-12	6.81	6.43