



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LED Driver

Indoor 50W Non-Dimmable SI-EPF006440WW



SELV Constant Current LED Driver Easy Current Selection – No Dimming

Features & Benefits

- Output Currents: 800 / 925 / 1050 mA (fixed, selectable)
- Output Voltage Range: 27 ~ 54 Vdc (SELV equivalent)
- Output Power Range: 23 ~ 55 W
- Input Voltage: 220 ~ 240 V
- Protections: Overload, No Load, Short Circuit, Over Temperature, Over Voltage, Load Hot Plug
- t_a Range: -20 ~ +50 °C
- Expected Lifetime: 100,000 hours at $t_c = 65$ °C
- Wire bridge to select the current
- Long lasting & high reliability
- Slim metal housing
- Double output connectors (parallel connection)

Applications

- Ambient Lighting (Linear and Area) and other Indoor Lighting Applications
- Office – Industry – Shop
- Suitable for emergency lighting units



Table of Contents

1.	Characteristics	-----	3
2.	Typical Characteristics Graphs	-----	5
3.	Protection	-----	6
4.	Outline Drawing & Dimension	-----	7
5.	Label Structure	-----	8
6.	Packing Structure	-----	8
7.	Precautions in Handling & Use	-----	9

1. Characteristics

Article	Symbol	Specification			Unit	Note
		Min.	Typ.	Max.		
INPUT SPECIFICATIONS						
Nominal Voltage	V _{in}		220 ~ 240		V _{ac}	
Nominal Frequency	f _{in}		0 / 50 / 60		Hz	Incl. DC or pulse DC
AC Voltage Range		198		264	V _{ac}	
DC Voltage Range		176		276	V	DC or pulse DC
Maximum Voltage				320	V _{ac}	2 hours max. (unit might not operate in this abnormal condition)
Nominal Current	I _{in}		300		mA	
Total Harmonic Distortion	THD			10	%	At full load, 220-240 V, 50 Hz (see graph)
Power Factor	PF	0.95			-	At full load, 220-240 V, 50 Hz (see graph)
Efficiency	η	86			%	At full load, 220-240 V, 50 Hz (see graph)
Power Losses				8.9	W	Full load
No-load Power			n/a		W	Load switching on output side is safe but not permitted
Stand-by Power			n/a		W	Unit is not dimmable/controllable
Protection Class			I		-	PE can be connected to either terminal or housing
In-rush Current				53	A _{pk}	t _{width} = 230 μs typ. (at 50% I _{pk})
Units per Circuit Breaker				B16: 28 B10: 17	-	I _{max} = 53 A, t _{width} = 230 μs
Leakage Current				0.5	mA	Through PE, output floating
OUTPUT SPECIFICATIONS						
Nominal Voltage	V _o		27 ~ 54		V _{dc}	With load
Max. Voltage				60	V _{dc}	Open circuit, No-load protection will put output down to approx. 1-2 V
Nominal Current	I _o		800 / 925 / 1050		mA	±10 %, 1050 mA default (terminals 5, 6, 7 open)
Current Ripple				10	%	Ripple / average at 100 Hz, full load
Nominal Power	P _o		23 ~ 55	55	W	
Galvanic Isolation			SELV-equivalent			Output to mains – Touch current < 0.5 mA
Touch Current				0.5	mA	According to EN 60598-1 annex G and EN 61347-1 annex A


Article	Symbol	Specification			Unit	Note
		Min.	Typ.	Max.		
DIMMING SPECIFICATIONS						
Dimming Control			n/a			Unit is not dimmable
ENVIRONMENTAL SPECIFICATIONS						
Ambient Temperature	t_a	-20		50	°C	
Case Temperature	t_c			75	°C	Measured at t_c point as indicated on the product label
Case Temperature in fault condition				110	°C	
Storage Temperature	t_s	-25		75	°C	Cool down before operating
Relative Humidity		5		85	%	Not condensing
Surge Transient Protection	L / N			±1	kV	According to EN 61547-5.7
	LN / PE			±2	kV	
IP Rating			IP20		-	Suitable for indoor environment
Mains Switching cycles		100,000			-	
Expected Lifetime		50,000			h	$t_c = 75\text{ °C}$, 0.2 % / 1000 h failure rate (14 h on / 10 h standby per day)
		100,000			h	$t_c = 65\text{ °C}$, 0.1 % / 1000 h failure rate (14 h on / 10 h standby per day)
Dimensions	L x W x H		280 x 30 x 21		mm	

Notes:


- Standards: EN 61347-1, EN 61347-2-13, EN 55015, EN 61547, EN 61000-3-2, EN 62384
- This LED Power Supply is suitable for emergency lighting fixtures according to EN 60598-2-22

2. Typical Characteristics Graphs


a) Operating Window

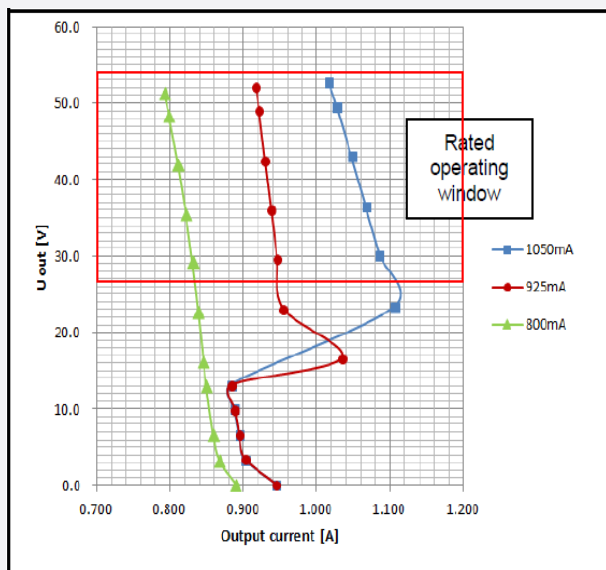


b) Efficiency vs. Load

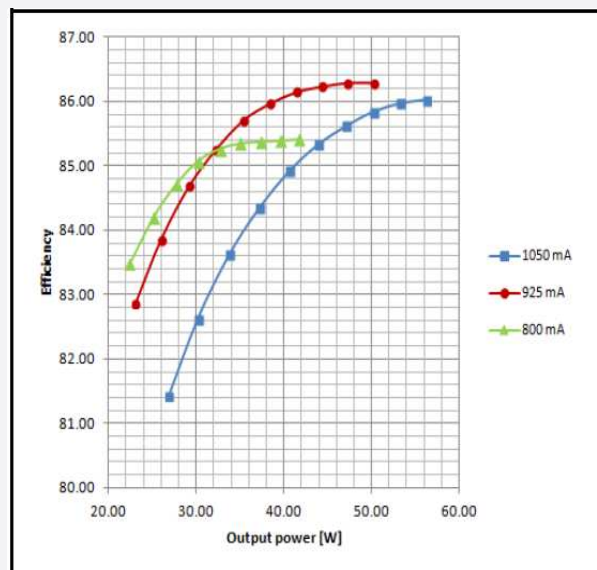

c) Power Factor vs. Load

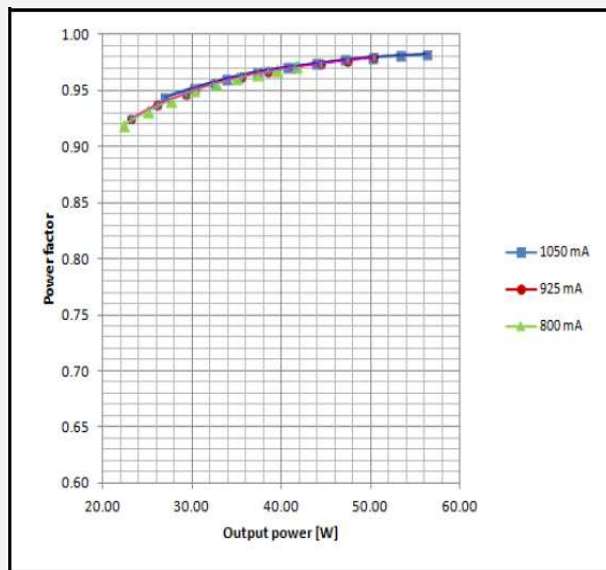

d) Total Harmonic Distortion vs. Load

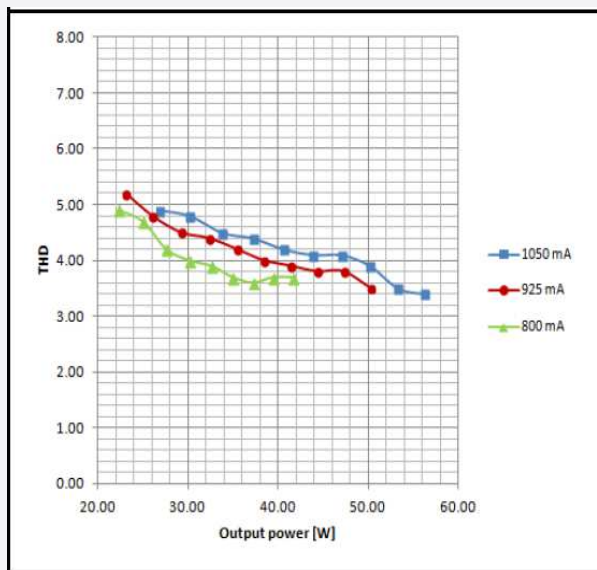

3. Protection

- **Input over voltage protection**

Mains up to 320 Vac, for two hours maximum, will not destroy both the unit and the load; shut down of load might occur in this condition.

- **Output short circuit protection**

Short circuit current is limited to approx. 1 A without damage to the unit, for unlimited time.

See typical operating window graph for details. Be sure the load is designed to withstand the short circuit current as well.

- **Output overload protection**

The unit is intrinsically protected against overloading because the output voltage is limited.

- **Output over voltage protection**

Shut down of load happens if output voltage exceeds 54 V; mains switchover is needed to restart the unit.

To avoid unexpected power off, be sure the LED module operating voltage never exceeds 54 V, including cold start condition.

- **Output under voltage protection**

The unit is not damaged if the load voltage is lower than 27 V, but the load current increases up to the short circuit value, see typical operating window graph for details. Be sure the load is safely operated if this event might occur.

- **No load operation**

The unit is not damaged in this condition; the output voltage is lower than 2 V, which enables a safe LED load connection, but mains switchover is needed to power the load.

- **Over temperature protection**


The unit is protected against temporary overheating by automatic reduction of the output power. If t_c exceeds approx. 85 °C the output current is reduced down to the lowest nominal value (800 mA). If t_c exceeds approx. 105 °C the load is shut down. The protection is automatically reversible, without mains switchover

- **Load hot plug protection**

Connection of LED load on secondary side is allowed without damage to the LED; LED will turn on automatically.

4. Outline Drawing & Dimension

a) Dimension (mm)

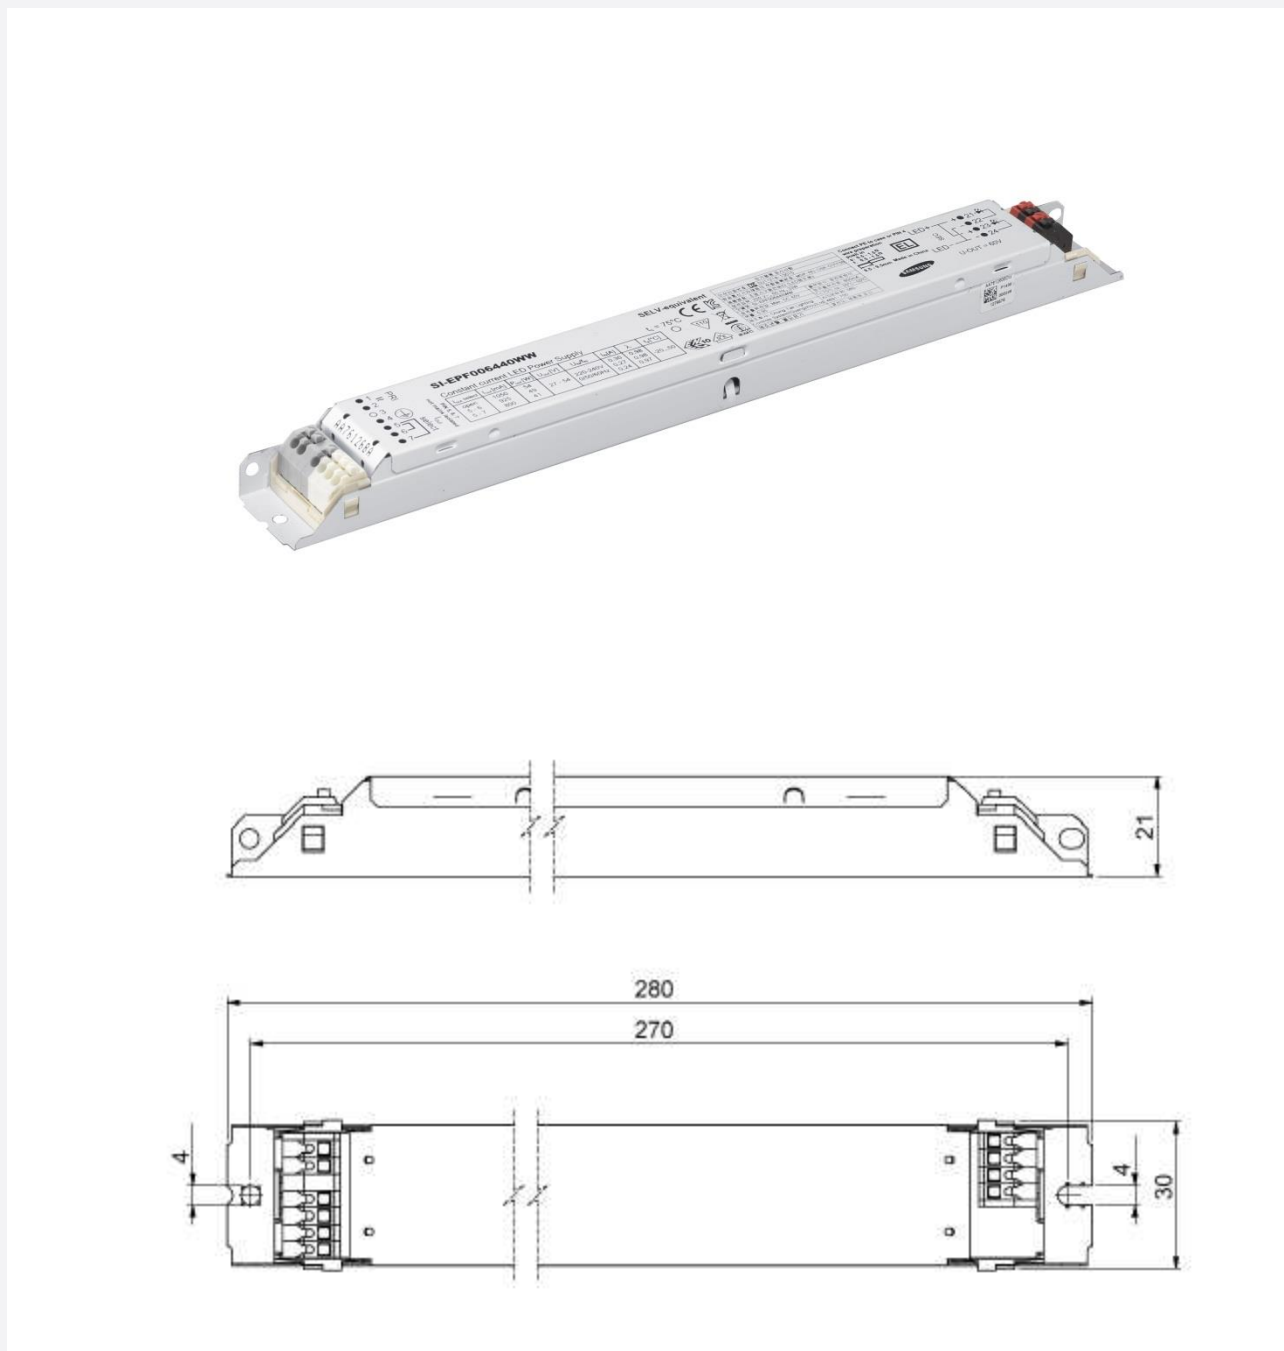

Housing material: metal, white painted

b) Wiring Diagram

Input:

- Gray 1 – Mains
- Gray 2 – Mains
- Gray 3 – n/a
- Gray 4 – PE
- White 5 – CS common
- White 6 – CS 1400 mA
- White 7 – CS 1200 mA

5, 6, 7 – CS not isolated from mains
Caution for CS wire bridge:
mandatory use of basic insulated wire suitable for mains voltage.

Output:

- Red 21 – LED +
- Black 22 – LED –
- Red 23 – LED +
- Black 24 – LED –

21 & 23 internally connected
22 & 24 internally connected

Load wires length: 2 m max
 CS wires length: 0.3 m max

- Connectors type (input and output): Push-in terminals
- Wire cross-section: solid and flexible: 0.5 - 1.5 mm²
- Wire peeling length: 8.5 - 9.5 mm

Two or more units cannot be connected together on secondary side (terminals 21 .. 24)

5. Label Structure

- 1 PRI
- 2 N
- 3
- 4 PE
- 5 select
- 6 not mains isolated
- 7 not mains isolated

SI-EPF006440WW

Constant current LED Power Supply

t_c = 75°C

I _{out} select	I _{out} [mA]	P _{out} [W]	U _{out} [V]	U _{in} /f _{in}	I _{in} [A]	λ	t _h [°C]
open	1050	54	27 - 54	220-240V	0.30	0.98	-20...50
5 - 6	925	49		0/50/60Hz	0.27	0.98	
5 - 7	800	41			0.24	0.97	

SELV-equivalent

원기등록 표시사항

안전인증번호: KC SU11214-13010

방송통신기자재등의 적합등록번호: MSP-REI-OSR-OTF150

제품명칭: 조명기구용컨버터 (LED용부품)

정격입력: 220 V~, 60 Hz, 33W

모델명: SI-EPF006440WW

정격출력전압: Max. DC 60V

효율: 0.95

제조회사: Chung Tak Lighting Controls System(Guangzhou), Ltd

제조연월: 별도표기

Connect PE to case or PIN 4

wire preparation

push in

s: 0.5 - 1.5mm

f: 0.5 - 1.5mm

8.5 - 9.5mm

Made in China

U-OUT = 60V

6. Packing Structure

Packing material	Max. quantity (pcs)
Outer Box	20



7. Precautions in Handling & Use

- 1) To prevent the LED Driver from any defect, please handle and store it with care
 - Do not drop or give shock
 - Do not store in very humid location or at extreme temperature
 - Do not open or disassemble the product
- 2) Static electricity or surge voltage may damage the components inside LED Driver, as such please observe proper anti-electrostatic working process
 - People handling the Driver should be well grounded (e.g. using ESD wrist band) and wear anti-static working clothes and gloves
 - All related devices and instruments in the production line should be well grounded (e.g. working table, measuring equipment, assembly jigs)
- 3) Observe the correct polarity of output terminal
- 4) Avoid input voltage exceeds the maximum rating, which will cause damage to the circuit and result in malfunction

Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit www.samsungled.com.

Copyright © 2014 Samsung Electronics Co., Ltd. All rights reserved.
Samsung is a registered trademark of Samsung Electronics Co., Ltd.
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
95, Samsung 2-ro
Giheung-gu
Yongin-si, Gyeonggi-do, 446-711
KOREA

www.samsungled.com

