



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Description

The Si2166-B20 integrates DVB-S, DVB-S2 (AMC-compliant), and DSS digital demodulators into a single CMOS chip for the broadest range of satellite TV standards. Leveraging Silicon Labs' proven digital demodulation architecture, the Si2166-B20 achieves superior satellite reception performance while minimizing front-end design complexity and cost.

The satellite demodulation functionality allows demodulating widely deployed DVB-S, DIRECTV™ (DSS) legacy standards, and new generation DVB-S2 satellite broadcast. A zero-IF interface with two high-speed ADCs allows for a seamless connection to market proven satellite silicon tuners. Constant Coding Modulation (CCM), QPSK/8PSK demodulation schemes and broadcast profile are the main specifications of the DVB-S2 demodulator. Silicon Labs' innovative LDPC and BCH decoding architecture delivers best-in-class reception while exhibiting low power dissipation.

For DVB-S/DSS standards, an innovative and advanced FEC decoding scheme is implemented resulting in higher performance.

The Si2166-B20 offers an on-chip blind scanning algorithm for DVB-S and DVB-S2 standards (as well as blind lock function). It also integrates DiSEqC™ 2.0 LNB interface for satellite dish control.


The Si2166-B20 programmable Transport Stream interface provides a flexible range of output modes and is fully compatible with all MPEG decoders or conditional access modules to support any customer application. Si2166-B20 is software compatible with Si2166-A10 and is also fully API compatible with Si2167-B and Si2168/69.

Features

- DVB-S2 (ETSI EN 302 307 and TR102-376)
 - QPSK/8PSK demodulator and FEC decoder
 - Broadcast profile: CCM, 64800 bits frame, single TS
 - 1 to 45 MSymbol/s (optimized for 2 to 32 MSymbol/s)
 - DIRECTV™ AMC compatible
- DVB-S (ETSI EN 300 421)
 - QPSK demodulator and enhanced FEC decoder
 - 1 to 45 MSymbol/s
- DIRECTV™ DSS compliant
- DiSEqC™ 2.0 interface and Unicable support
- I²C serial bus interfaces (master and host)
- Two ADCs with differential inputs (ZIF input)
- GPIOs and multi-purpose ports for independent AGCs (up to 4) to control satellite tuner
- Firmware control for upgradeability
- Flexible TS interface with serial or parallel single output
- Fast lock times for all media
- Only two power supplies: 1.2 and 3.3 V
- Pin-to-pin compatibility with former Si2167/66-A10 and Si2167-B, Si2168/69
- 7x7 mm, QFN-48 pin package, Pb-free/RoHS compliant

Applications

- Full-NIM
- iDTV (integrated Digital TV)
- Digital satellite STB
- PC-TV accessories
- PVR, DVD, and Blue Ray disc recorders

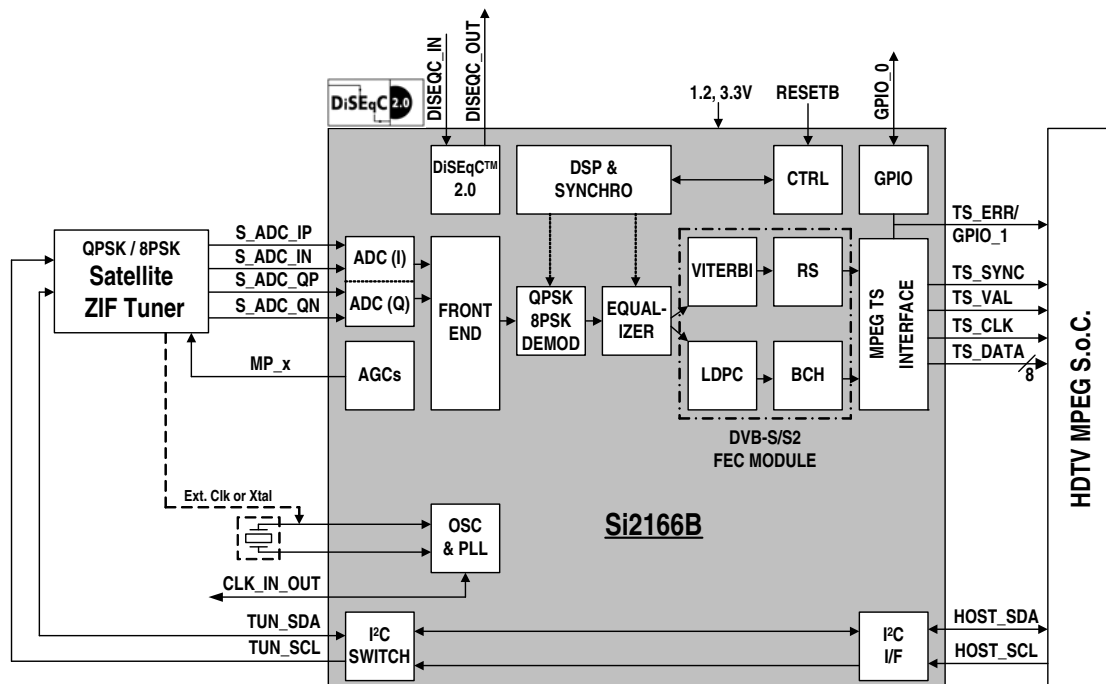

Selected Electrical Specifications


(T_A = -10 to 75 °C)

Parameter	Test Condition	Min	Typ	Max	Unit
General					
Input clock reference		4	—	30	MHz
Supported XTAL frequency		16	—	30	MHz
Total power consumption	DVB-S ¹	—	230	—	mW
	DVB-S2 ²	—	465	—	mW
Thermal resistance, θ_{JA}	2 layer PCB	—	32	—	°C/W
	4 layer PCB	—	23	—	°C/W
Input ADC Sampling Clock					
Satellite DVB-S	45 MBaud	91	94	101	MHz
Satellite DVB-S2	32 MBaud	65	70	101	MHz
Power Supplies					
V _{DD-VCORE}		1.14	1.20	1.30	V
V _{DD-VANA}		3.00	3.30	3.60	V
V _{DD-VIO}		3.00	3.30	3.60	V

Notes:

1. Test conditions: 30 MBaud, CR = 7/8, parallel TS (at QEF: BER = 2. 10⁻⁴).
2. Test conditions: 32 MBaud, 3/5 Code Rate, 8PSK, pilots On, parallel TS, C/N at picture failure (PER = 10⁻⁴).

Pin Assignments

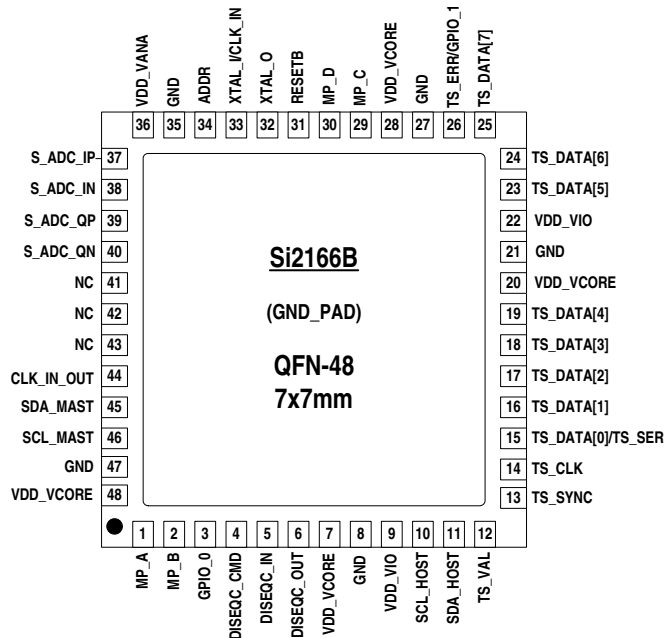

Selection Guide

Part Number	Description
Si2166-B20-GM	Satellite TV Demodulator for DVB-S/S2, 7x7 mm QFN-48.