



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SMT15E Series

Non-Isolated DC-DC Converter

Data Sheet

Total Power: 49.5 Watts
Input Voltage: 10 - 14 Vdc
of Outputs: Single

SPECIAL FEATURES

- 15 A current rating
- Input voltage range: 10 - 14 Vdc
- Output voltage range: 0.8 - 3.63 V
- Ultra high efficiency: 94% @ 12 Vin and 3.3 Vout
- Extremely low internal power dissipation
- Minimal thermal design concerns
- Designed-in reliability: MTBF of 6,920,000 hours per Telcordia SR-332
- Ideal solution where board space is at a premium or tighter card pitch is required
- Industry standard surface-mount footprint
- Available RoHS compliant
- Two year warranty

SAFETY

- UL, cUL CAN/CSA 22.2 No. E186249
- TÜV Product Service (EN60950) Certificate No. B 08 05 51485 378
- Certificate No. B 03 10 38572
- CB report and certificate to IEC60950 DE3-51686M1



Electrical Specifications

Input		
Input voltage range		10 - 14 Vdc
Input current	No load (max.)	100 mA typical
Input current (max.)		4.5 A max. @ Io max. and Vout = 3.3 V
Input reflected ripple		100 mA rms
Remote ON/OFF		See Note 1
Start-up time		<20 ms
Output		
Voltage adjustability		0.8 - 3.63 Vdc
Setpoint accuracy		±0.4%
Line regulation		±0.2%
Load regulation		±1.0%
Total error band		±3.0%
Minimum load		0 A
Overshoot/Undershoot		None
Ripple and noise	5 - 20 MHz	60 mV pk-pk 25 mV rms max.
Temperature coefficient		±0.01% / °C
Transient response		100 mV max. deviation 100 μs recovery to within ±1.0%
Remote sense		10% Vo compensation

All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

General Specifications

Efficiency		94%
Insulation voltage		Non-isolated
Switching frequency	Fixed	200 kHz
Approvals and standards		EN60950 UL/cUL60950
Material flammability		UL94V-0
Dimensions	L x W x H	33.02 x 13.46 x 8.21 mm 1.3 x 0.53 x 0.323 inches
Weight		6.3 g (0.22 oz)
Coplanarity		100 µm
MTBF	Telcordia SR-332	7,042,000 hours

Environmental Specifications

Thermal performance	Operating ambient temperature	-0 °C to +85 °C
(See Note 2)	Non-operating temperature	-40 °C to +125 °C
Protection		
Short-circuit	Continuous	
Thermal	Automatic recovery	

EMC Characteristics

Electrostatic discharge	EN61000-4-2, IEC801-2
Conducted immunity	EN61000-4-6
Radiated immunity	EN61000-4-3

Ordering Information

Model Number ⁽⁴⁾	Output Power (Max.)	Input Voltage	Output Voltage	Output Current (Min.)	Output Current (Max.)	Efficiency (Typical) ⁽⁵⁾	Regulation	
							Line	Load
SMT15E-12W3V3J	49.5 W	10 - 14 Vdc	0.8 - 3.63 V	0 A	15 A	94%	±0.2%	±1.0%

Part Number System with Options

Product Family	Rated Output Current	Performance	Input Voltage	Type of Output	Output Voltage	Packaging Options ⁽⁶⁾
SMT	15	E	12	W	3V3	TJ
SMT - Surface Mount	15 = 15 Amps	E = Enhanced performance	12 = 10 - 13 Vdc	W = Wide	0.8 - 3.63 Vdc	No "-T" suffix = Pb-free (RoHS 6/6 compliant) in trays

Output Voltage Adjustment

The ultra-wide output voltage trim range offers major advantages to users who select the SMT15E-12W3V3J. It is no longer necessary to purchase a variety of modules in order to cover different output voltages. The output voltage can be trimmed in a range of 0.8 Vdc to 3.63 Vdc. When the SMT15E-12W3V3J converter leaves the factory the output has been adjusted to the default voltage of 0.8 V.

Notes:


- The SMT15E features a 'Positive Logic' Remote ON/OFF operation. If not using the Remote ON/OFF pin, leave the pin open (the converter will be on). The Remote ON/OFF pin is referenced to ground. The following conditions apply for the SMT15E:

Configuration	Converter Operation
Remote pin open circuit	Unit is ON
Remote pin pulled low [Von/off < 0.8 V]	Unit is OFF
Remote pin pulled high [Von/off > 1.6 V]	Unit is ON

- Full derating curves available in both the Longform Datasheet and Application Note.
- Typical efficiency figures for various output voltages are as follows:
 - 1.2 V 83%
 - 1.5 V 85.5%
 - 1.8 V 87.5%
 - 2.0 V 91%
 - 2.5 V 92%
- NOTICE: Some models do not support all options. Please contact your local Artesyn representative or use the on-line model number search tool at <http://www.artesyn.com/power> to find a suitable alternative.

Mechanical Drawings

Pin Assignments	
Pin	Function
1	Remote ON/OFF
2	Remote Sense +
3	Trim
4	+Vout
5	Ground
6	+Vin

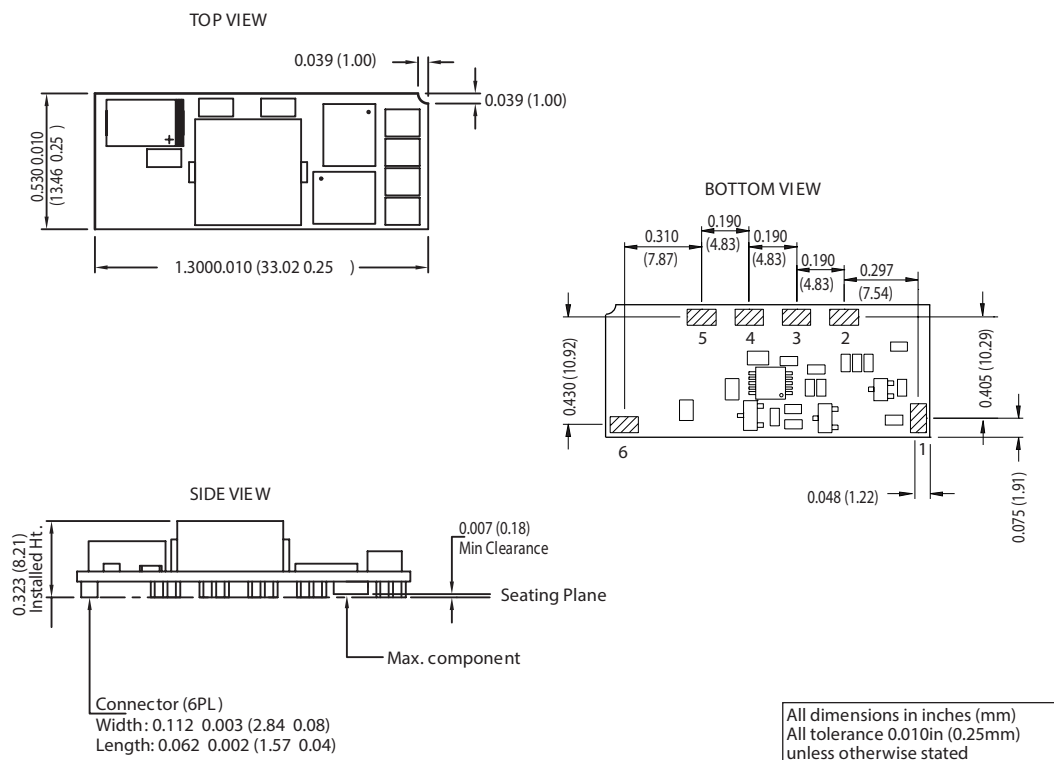

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
 Tempe, AZ 85282
 USA
 +1 888 412 7832

Europe (UK)

Waterfront Business Park
 Merry Hill, Dudley
 West Midlands, DY5 1LX
 United Kingdom
 +44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
 2 Wing Yip Street
 Kwun Tong, Kowloon
 Hong Kong
 +852 2176 3333



www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2015 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
 For support: productsupport.ep@artesyn.com