

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








R series (10A

-10 -223

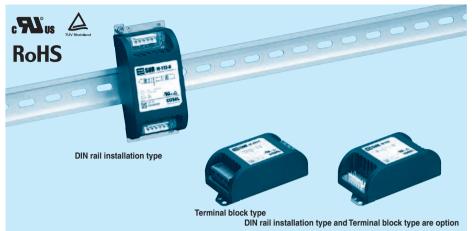

①Model Name ②Rated Current

(3) Line to ground capacitor code: See table 1.1.

table1.1 Line to ground capacitor code

Code	Line to ground capacitor (nominal value)	
000	Not Provided	
223	22000pF	

(4)Options

D :DIN rail installation type
T :Terminal block type

DT:Terminal block and DIN rail type

* The dimensions change when the option is set. Refer to External view.

Features of SNR series (10A)

Ripple noise attenuation type for switch mode power supplies(DC)

· 50 VDC


· Best filter for switch mode power supplies of analog circuits

Specifications

	1			
No.	Items	SNR-10-223		
	items	Interface:Connector		
1	Rated Voltage DC[V]	50		
2	Rated Current DC[A] *1	10 (Peak 20)		
3	Test Voltage (Terminal-Mounting Plate)	500 VAC (Cutoff Current = 100mA), 1minute at room temperature and humidity		
4	Isolation Resistance (Terminal-Mounting Plate)	500 VDC 50M Ω min at room temperature and humidity		
5	D.C Resistance[m Ω]	20 max		
6	Operating temperature	-40 to +71°C (Refer to Derating Curve)		
7	Operating humidity	20 to 95%RH (Non condensing)		
8	Storage temperature/humidity	-40 to +75℃/20 to 95%RH (Non condensing)		
9	Vibration	10 to 55Hz, 19.6m/s² (2G), 3min. Period, 1hour each X, Y and Z axis		
10	Impact	196.1m/s² (20G), 11ms Once each X, Y and Z axis		
11	Safety agency approvals	UL60950-1, C-UL (CSA60950-1), EN60950-1		
12	Case size (without projection) /Weight	52×35×117 mm [2.05×1.38×4.61 inches] (W×H×D) /140g max (Option : -D, -T, -DT refer to external view)		

^{*1} Peak current for 10 sec. And Duty 35% max, refer to Instruction Manual 5. In detail.


Circuit Diagram

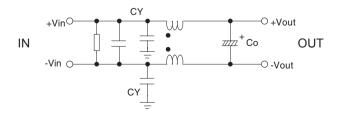

CY: Line to ground capacitor Co: Electrolytic capacitor $\frac{\perp}{=}$: Mounting Plate

■Expected life: 10 years

Derating Curve

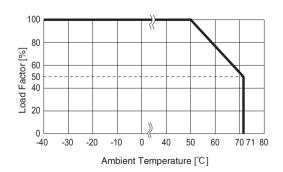



Terminal cover

 $2 - \phi 4.5$

[0.18] Mounting Hole

External view

Standard Type

Terminal block Type


TB1

Mounting

35

Plate

8-M3

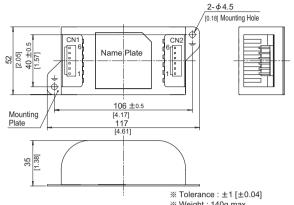

* Weight: 140g max * PCB Material /thickness : CEM3 /1.6mm [0.06 inches] Mounting plate : Iron (surface finishing : nickel plating) t=1.0 [0.04]

* Case : PBT

※ Dimensions in mm, []=inches ※ Keeping drawing current per pin below 5A (7A at peak current) for CN1 to CN2

※ Tolerance: +1 [+0.04] Weight: 150g max

※ PCB Material /thickness : CEM3 /1.6mm [0.06 inches]

Mounting plate: Iron (surface finishing: nickel plating) t=1.0 [0.04]

* Case: PBT

※ Dimensions in mm, []=inches

117 [4.61]

※ Terminal block screw tightening torque M3:0.8N ⋅ m (8.5kgf ⋅ cm) max

Keeping drawing current per pin below 8A (10A at peak current) for TB1 to TB2

I/O Connector Mating connector Terminal CN1,CN2 B6P-VH VHR-6N Reel:SVH-21T-P1.1 Bulk-BVH-21T-P1 1

1.2.3

Pin No. Function

-Vout

+Vout

(Mfr:J.S.T)

(Mfr:J.S.T)

Option harness: Refer to Instruction Manual 4

DIN rail installation Type

Pin No. Function


-Vin

+Vin

1,2,3

4.5.6

Terminal block type+DIN rail installation Type

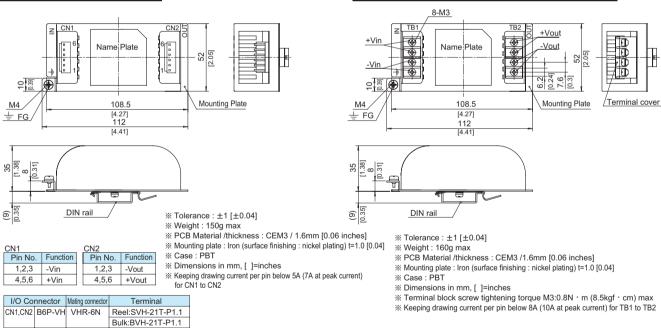

Option harness: Refer to Instruction Manual 4

■Note when installing the EMI/EMC Filter on a DIN rail.

When the EMI/EMC Filter is grounded through the DIN rail, the proper noise attenuation may not be achieved.

Be sure to connect the FG terminal of the EMI/ EMC Filter body to the earth.

