



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





N-Channel JFETs

J201 SST201
J202 SST202
J204 SST204

PRODUCT SUMMARY				
Part Number	$V_{GS(off)}$ (V)	$V_{(BR)GSS}$ Min (V)	g_{fs} Min (mS)	I_{DSS} Min (mA)
J/SST201	-0.3 to -1.5	-40	0.5	0.2
J/SST202	-0.8 to -4	-40	1	0.9
J/SST204	-0.3 to -2	-25	0.5	0.2

FEATURES

- Low Cutoff Voltage: J201 <1.5 V
- High Input Impedance
- Very Low Noise
- High Gain: $A_v = 80 @ 20 \mu A$

BENEFITS

- Full Performance from Low Voltage Power Supply: Down to 1.5 V
- Low Signal Loss/System Error
- High System Sensitivity
- High Quality Low-Level Signal Amplification

APPLICATIONS

- High-Gain, Low-Noise Amplifiers
- Low-Current, Low-Voltage Battery-Powered Amplifiers
- Infrared Detector Amplifiers
- Ultra High Input Impedance Pre-Amplifiers

DESCRIPTION



The J/SST201 series features low leakage, very low noise, and low cutoff voltage for use with low-level power supplies. The J/SST201 is excellent for battery powered equipment and low current amplifiers.

The J series, TO-226 (TO-92) plastic package, provides low cost, while the SST series, TO-236 (SOT-23) package, provides surface-mount capability. Both the J and SST series

are available in tape-and-reel for automated assembly (see Packaging Information).

For similar products in TO-206AA (TO-18) packaging, see the 2N4338/4339/4340/4341 data sheet.

For applications information see AN102 and AN106.

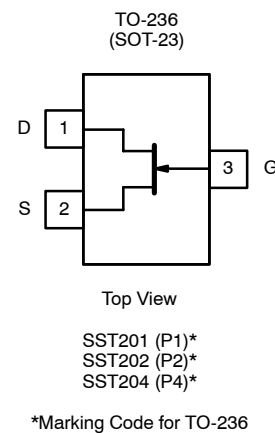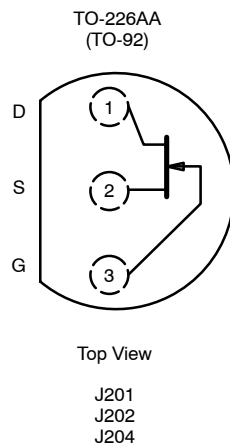



ABSOLUTE MAXIMUM RATINGS

Gate-Drain, Gate-Source Voltage -40 V
 Gate Current 50 mA
 Lead Temperature (¹/₁₆" from case for 10 sec.) 300°C
 Storage Temperature -55 to 150°C

Operating Junction Temperature -55 to 150°C
 Power Dissipation^a 350 mW

Notes
 a. Derate 2.8 mW/°C above 25°C

SPECIFICATIONS (T _A = 25°C UNLESS OTHERWISE NOTED)										
Parameter	Symbol	Test Conditions	Typ ^a	Limits						Unit
				J/SST201		J/SST202		J/SST204 ^c		
				Min	Max	Min	Max	Min	Max	
Static										
Gate-Source Breakdown Voltage	V _{(BR)GSS}	I _G = -1 μA, V _{DS} = 0 V		-40		-40		-25		V
Gate-Source Cutoff Voltage	V _{GS(off)}	V _{DS} = 15 V, I _D = 10 nA		-0.3	-1.5	-0.8	-4	-0.3	-2	
Saturation Drain Current ^b	I _{DSS}	V _{DS} = 15 V, V _{GS} = 0 V		0.2	1	0.9	4.5	0.2	3	mA
Gate Reverse Current	I _{GSS}	V _{GS} = -20 V, V _{DS} = 0 V T _A = 125°C	-2		-100		-100		-100	pA
			-1						nA	
Gate Operating Current	I _G	V _{DG} = 10 V, I _D = 0.1 mA	-2							pA
Drain Cutoff Current	I _{D(off)}	V _{DS} = 15 V, V _{GS} = -5 V	2							
Gate-Source Forward Voltage	V _{GS(F)}	I _G = 1 mA, V _{DS} = 0 V	0.7							V
Dynamic										
Common-Source Forward Transconductance	g _{fs}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 kHz		0.5		1		0.5		mS
Common-Source Input Capacitance	C _{iss}	V _{DS} = 15 V, V _{GS} = 0 V f = 1 MHz	4.5							pF
Common-Source Reverse Transfer Capacitance	C _{rss}		1.3							
Equivalent Input Noise Voltage	e _n	V _{DS} = 10 V, V _{GS} = 0 V f = 1 kHz	6							nV/ √Hz


- Notes
 a. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
 b. Pulse test: PW ≤ 300 μs duty cycle ≤ 3%.
 c. See 2N/SST5484 Series for J204 and SST204 typical characteristic curves.

NPA, NH




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)


Drain Current and Transconductance vs. Gate-Source Cutoff Voltage

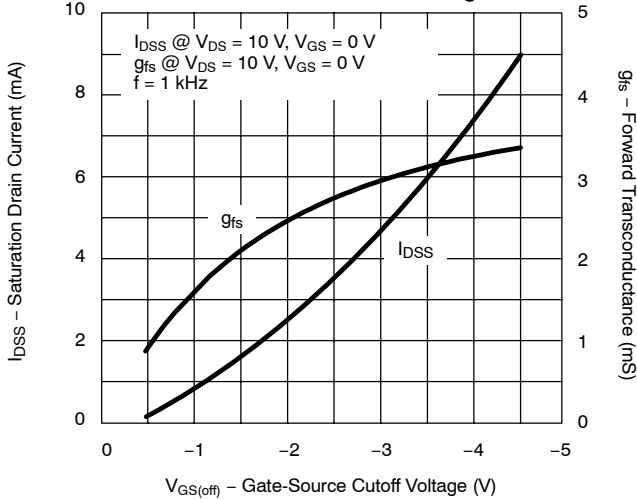


Gate Leakage Current

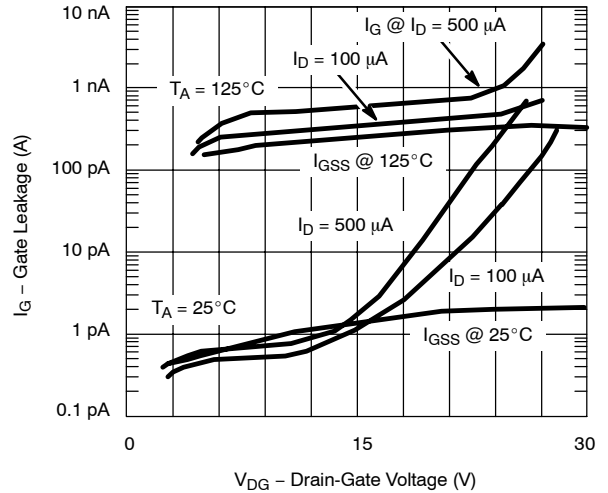


On-Resistance and Output Conductance vs. Gate-Source Cutoff Voltage

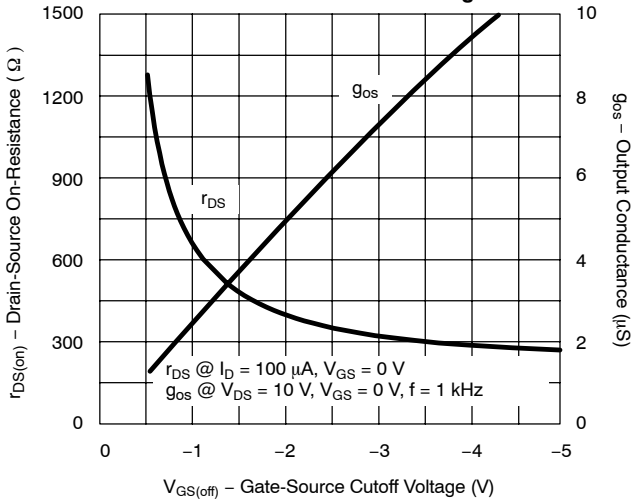


Common-Source Forward Transconductance vs. Drain Current

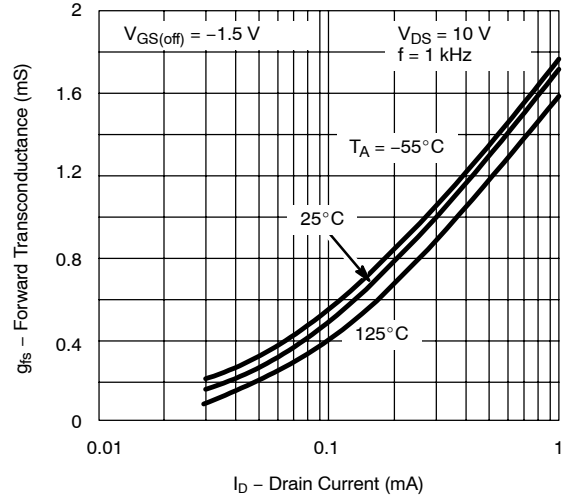







Output Characteristics

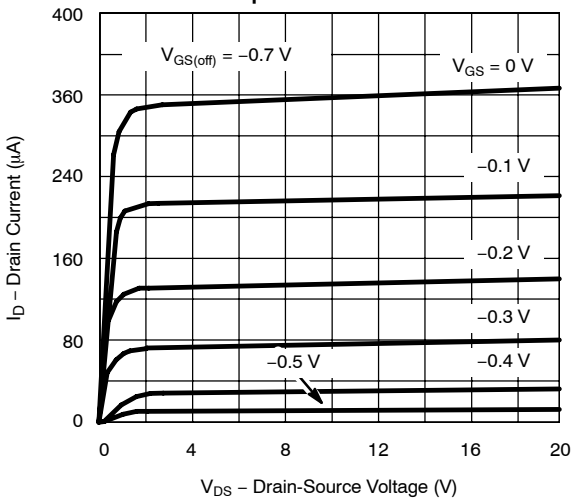

Output Characteristics

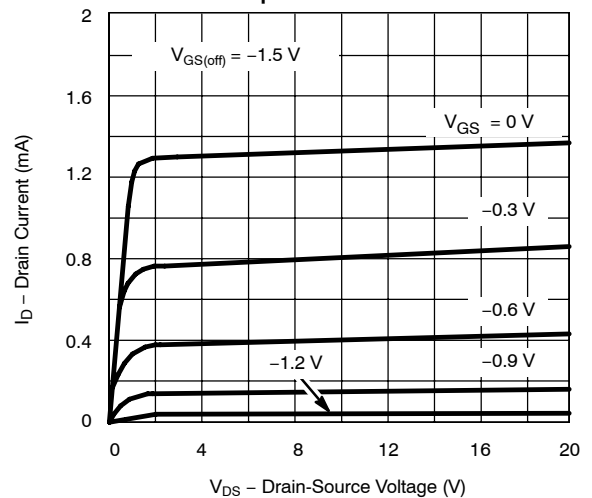


TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)

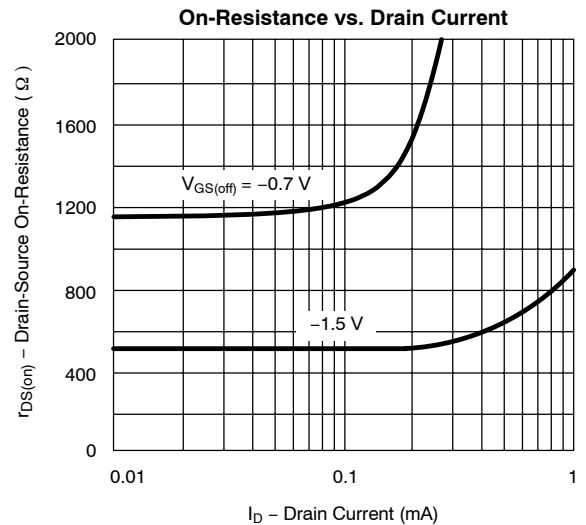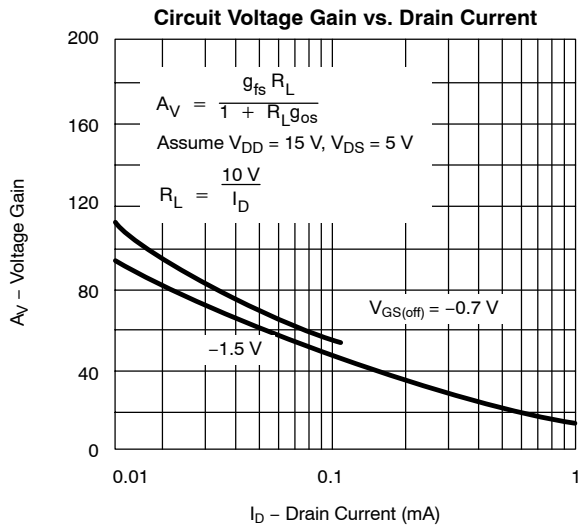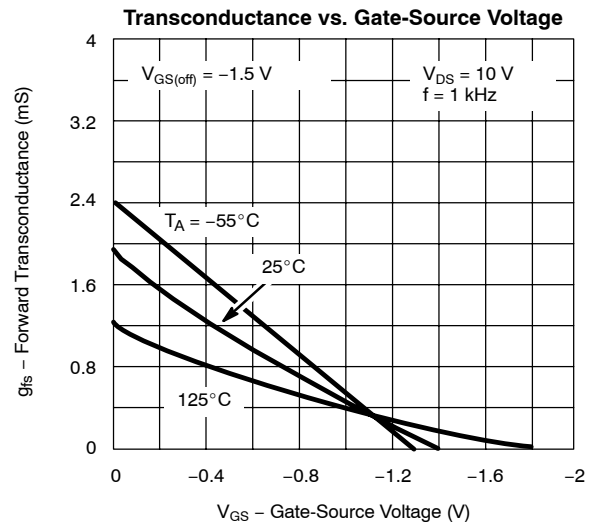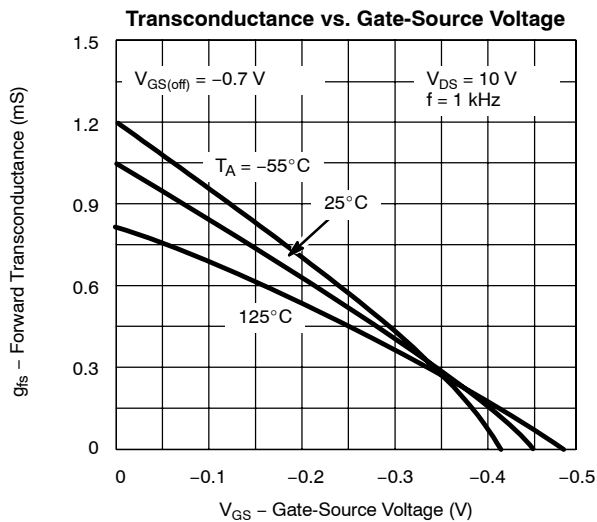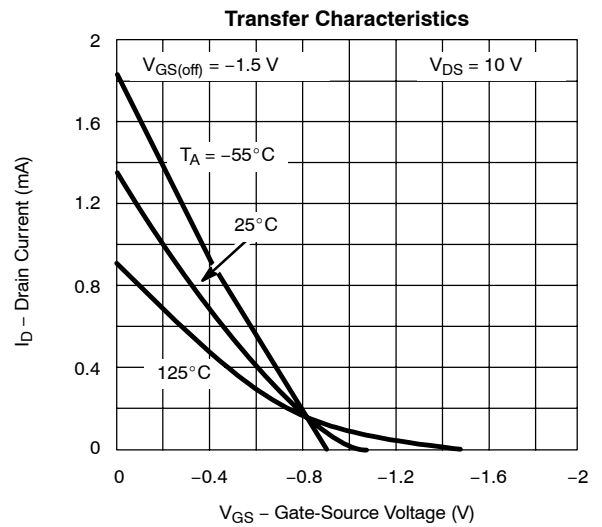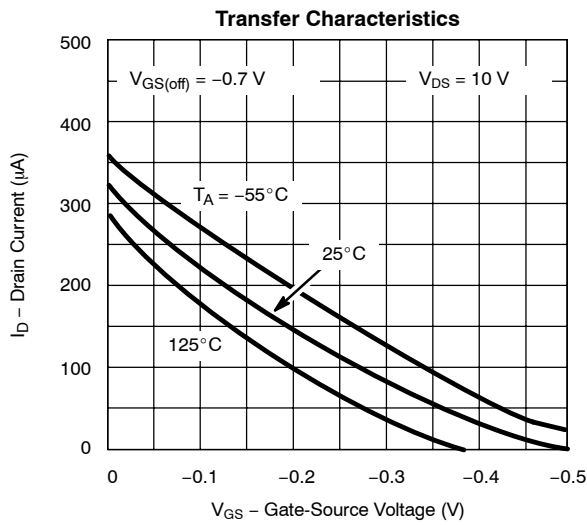




TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)


Common-Source Input Capacitance vs. Gate-Source Voltage

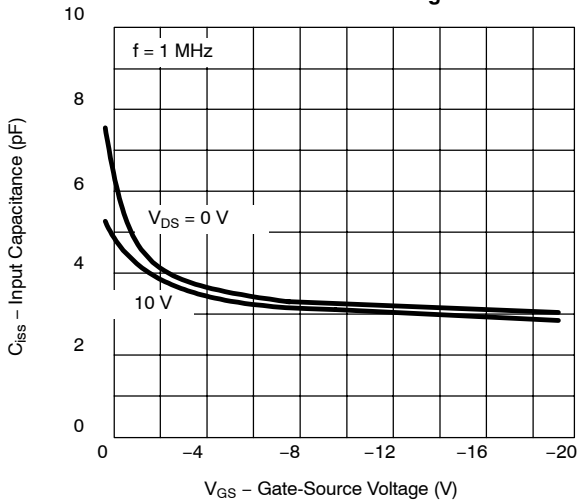


Common-Source Reverse Feedback Capacitance vs. Gate-Source Voltage

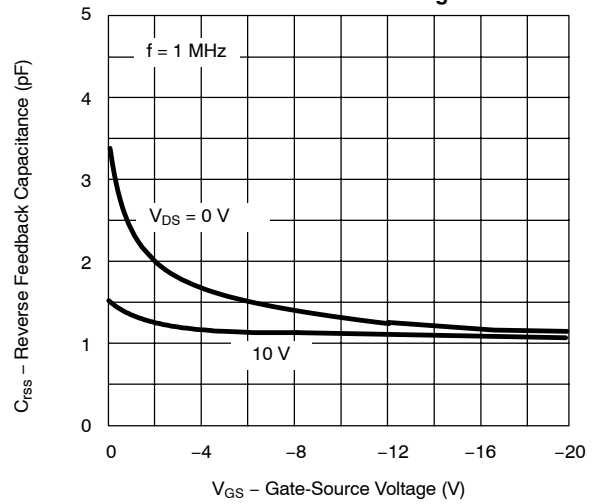


Output Conductance vs. Drain Current

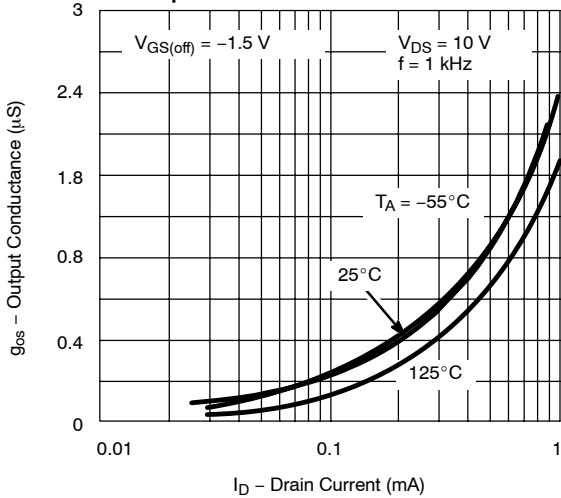


Equivalent Input Noise Voltage vs. Frequency

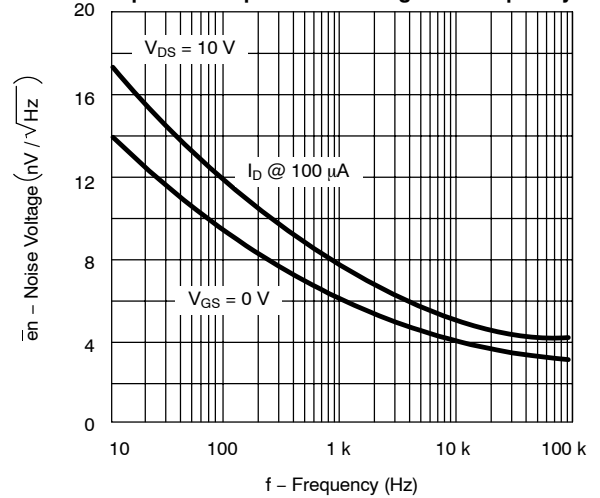

Output Characteristics

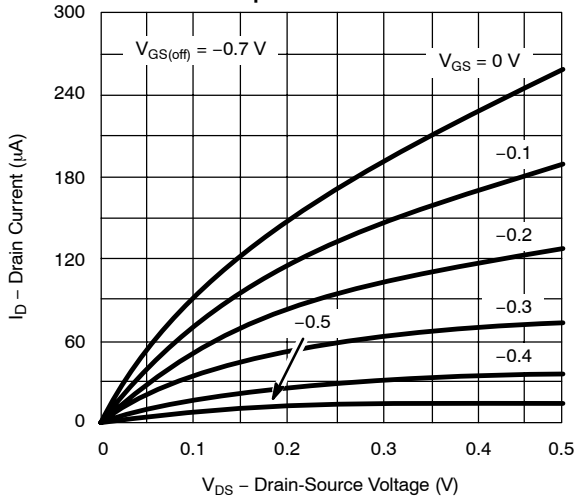

Output Characteristics

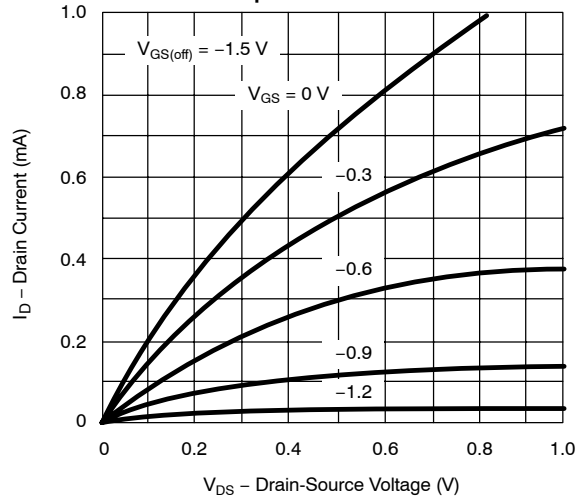



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.