



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Bus system cable - VS-PNRJ45-PNRJ45R-93K-0,3 - 1402511

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



SERCOS III patch cable

SERCOS III patch cable, shielded, star quad, AWG 22 stranded (7-wire), RAL 3020 (traffic red), RJ45 connector/IP 20, straight, to RJ45 connector/IP20, angled, length: 0.3 m



Key commercial data

Packing unit	0
Minimum order quantity	1
Catalog page	Page 321 (PC-2011)
GTIN	 4 046356 622509
Custom tariff number	85444210
Country of origin	POLAND

Technical data

Mechanical characteristics

Number of positions	4
Type of cable	Round cable
Length of cable	0.3 m
Ambient temperature (operation)	-20 °C ... 70 °C (cable, flexible installation)

Material data

Inflammability class according to UL 94	V0
Degree of protection	IP20

Line characteristics

Cable structure	1x4xAWG22/7; SF/Q
Conductor cross section	0.34 mm ²
AWG signal line	22
Conductor structure signal line	7x 0.25 mm
Core diameter including insulation	Approx. 1.5 mm
Thickness, insulation	Approx. 0.9 mm (Outer cable sheath)
External cable diameter	6.50 mm

Bus system cable - VS-PNRJ45-PNRJ45R-93K-0,3 - 1402511

Technical data

Line characteristics

Wire colors	White, yellow, blue, orange
External sheath, color	signal red RAL 3020
Insulation resistance	min. 0.5 GΩ*km
Conductor resistance	≤ 120 Ω/km
Transmission characteristics (category)	CAT5 (IEC 11801:2002), CAT5e (TIA 568B:2001)
Working capacitance	52 pF
Wave impedance	100 Ω ± 15 Ω (At 1- 100 MHz)
Signal runtime	5.3 ns/m
Coupling resistance	max. 20.00 mΩ/m
Test voltage Core/Core	2000 V
Test voltage Core/Shield	2000 V
Type of pair shielding	Aluminum-lined polyester foil
Overall twist	Star quad
Shielding	Tinned copper braided shield
Outer sheath, material	PVC
Material, inner sheath	PVC
Material conductor insulation	PE
Conductor material	Tin-plated Cu litz wires
Cable weight	67 kg/km
Smallest bending radius, fixed installation	min. 19.5 mm
Smallest bending radius, movable installation	min. 45.5 mm

Classifications

eclass

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27060307
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801

etim

ETIM 4.0	EC002599
----------	----------


unspsc

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Drawings


Bus system cable - VS-PNRJ45-PNRJ45R-93K-0,3 - 1402511

Dimensioned drawing

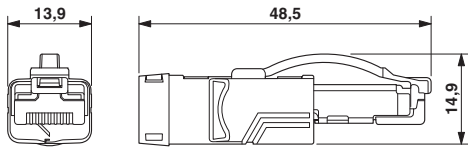

RJ45 plug connector, IP20

Dimensioned drawing

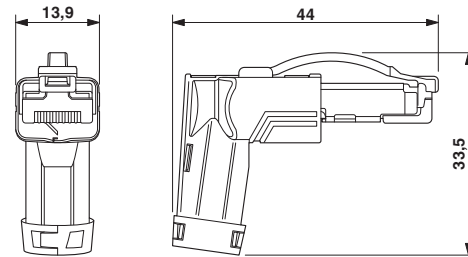

RJ45 plug-in connector, IP20, angled

Bus system cable - VS-PNRJ45-PNRJ45R-93K-0,3 - 1402511

Circuit diagram

