



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Features

- STM32F417IGH6 microcontroller
- 16-Mbit SRAM
- microSD™ memory-card slot (card provided)
- Boot from user Flash, system memory or SRAM
- ISO/IEC 14443 smartcard Type-A and Type-B support
- I²C-bus interface for compatible 64-Kbit EEPROMs, ST MEMSs and I/O expanders
- IEEE 802.3-2002 compliant Ethernet connector
- Two CAN-2.0 A/B channels on the same D-subminiature connector
- RS-232 communications
- IrDA transceiver (up to board version MB786 C-07)
- USB-OTG (HS and FS) ports with Micro-AB connectors
- Induction-motor control connector
- I²S Audio DAC, stereo audio jack for headset
- 3.2" 240x320 TFT color LCD with touch screen
- 4 colored LEDs
- Camera module and extension connector for ST-camera plug-in
- Joystick with 4-direction control and selector
- Reset, wakeup, tamper and user button
- RTC with backup battery
- Extension connector for daughterboard or wire-wrap board
- JTAG, SW and trace debug support
- Embedded ST-LINK/V2
- Five options for 5-V power supply: power jack, USB-FS connector, USB-HS connector, via ST-LINK/V2 or daughterboard

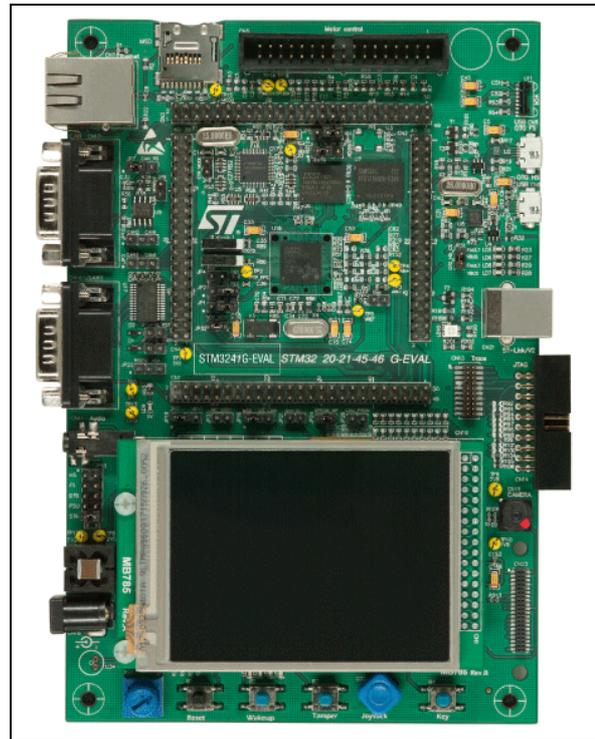

1. Picture is not contractual.

Description

The STM3241G-EVAL evaluation board is a complete demonstration and development platform for the STM32F417IGH6 high-performance 32-bit microcontroller with ARM® Cortex®-M4F processor with a cryptographic acceleration cell.

The full range of hardware features on the board helps users to evaluate all the peripherals (USB-OTG HS, USB-OTG FS, Ethernet, motor-control, CAN, microSD™-card, smartcard, USART, audio-DAC, RS-232, IrDA (up to board MB786 C-07), SRAM, ST-MEMS, EEPROM and others) and to develop applications.

The in-circuit ST-LINK/V2 tool can easily be used for JTAG and SWD interface debugging and programming.

System requirements

- Windows® OS (XP, 7 or 8) or Linux 64-bit or Mac OS® X
- USB Type A to Type B or Mini-B cable

Development toolchains

- ARM® Keil®: MDK-ARM™ (a)
- IAR™: EWARM (a)
- GCC-based IDEs (free AC6: SW4STM32, Atollic® TrueSTUDIO® (a) and others)

Demonstration software

Demonstration software is preloaded in the STM32F417IGH6 Flash memory for easy demonstration of the device peripherals in standalone mode. For more information and to download the latest version, refer to STM3240G-EVAL demonstration software on www.st.com.

Ordering information

To order the STM3241G-EVAL board with the STM32F417IGH6 MCU refer to the table below.

Table 1. Device summary

Order code	Target STM32
STM3241G-EVAL	STM32F417IGH6

a. Windows® only

Revision history

Table 2. Document revision history

Date	Revision	Changes
15-Sep-2011	1	Initial release.
16-Dec-2016	2	Updated title with MCU name Updated mentions of IrDA Added Section : System requirements Added Section : Development toolchains .

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved