



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Coupling - VS-MP-PPC/PPC-PO - 1403684

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)




Multi-port power coupling: for passive PROFINET cabling to robots, including mounting foot.

Product description

Push/pull power and data coupling; version 14



Key commercial data

Packing unit	1 PCE
GTIN	 4 046356 664332
Custom tariff number	85366990
Country of origin	GERMANY

Technical data

Mechanical characteristics

Connection profile	Power: 5-pos.
Insertion/withdrawal cycles	≤ 100 (Power)
Ambient temperature (operation)	-40 °C ... 70 °C

Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Degree of protection	IP65

Material data

Housing material	Aluminum alloy
------------------	----------------

Electrical characteristics

Nominal voltage U_N	24 V
-----------------------	------

Coupling - VS-MP-PPC/PPC-PO - 1403684

Technical data

Electrical characteristics

Nominal current I_N	16 A
-----------------------	------

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27061801
eCl@ss 6.0	27061801
eCl@ss 7.0	27061801
eCl@ss 8.0	27061801

ETIM


ETIM 3.0	EC000830
ETIM 4.0	EC001134
ETIM 5.0	EC001134

UNSPSC

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Drawings

Drilling diagram

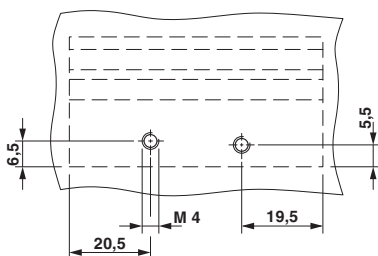

Dimensioned drawing

