



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# T3DSO1000 Data Sheet

## Oscilloscopes

### Debug with Confidence

#### 100 MHz – 200 MHz

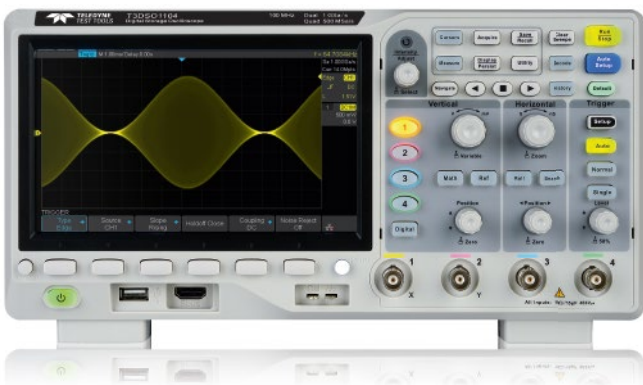

Front panel of the four channel series



Front panel of the two channel series

### Tools for Improved Debugging

- ✔ **Long Capture** – 7 Mpts/Ch and 14 Mpts interleaved.
 ✔ **Capture more time and show more waveform detail.**
- ✔ **Math and Measure** – 7 basic math functions plus FFT and 38 automatic measurement parameters.
 ✔ **Extract results from waveforms and measurements.**
- ✔ **Connectivity** – USB for mass storage, printing and PC control, plus LAN for fast data transfer.
 ✔ **Save data for external analysis and screen images for reports.**
- ✔ **Serial Bus Trigger and Decode** – I2C, SPI, UART, RS232, CAN, LIN.
 ✔ **Debug serial buses directly in your Oscilloscope.**
- ✔ **Waveform Sequence Recorder** – record and play back up to 80,000 waveforms.
 ✔ **Replay the changing waveform history.**
- ✔ **Optional MSO** – 16 Digital Channels (4 channel series only).
 ✔ **Add mixed signal debugging to your Oscilloscope.**

### Key Specifications

Bandwidth	100 MHz, 200 MHz
Channels	2 or 4
Memory	up to 7 Mpts/Ch (14 Mpts interleaved)
Sample Rate	up to 500 MS/s / 1 GS/s interleaved
Display	7" Bright TFT LCD (800 x 480)
Connectivity	USB Host, USB Device, LAN



# PRODUCT OVERVIEW

**T3DSO1102:** 2 Channel 100 MHz

**T3DSO1104:** 4 Channel 100 MHz

**T3DSO1204:** 4 Channel 200 MHz

**Teledyne Test Tools new T3DSO1000 Oscilloscopes feature two channel and four channel models. The two channel model is available with 100 MHz analog bandwidth, a single ADC with a 1 GSa/s maximum sample rate, and a single memory module with 14 Mpts of sample memory. The four channel scope is available in 100 and 200 MHz models and incorporates two 1 GSa/s ADCs and two 14 Mpts memory modules. When all channels are enabled, each channel has sample rate of 500 MSa/s and a standard record length of 7 Mpts. When only a single channel per ADC is active, the maximum sample rate is 1 GSa/s and the maximum record length is 14 Mpts.**

**For ease-of-use, the most commonly used functions can be accessed with its user-friendly front panel design.**

The T3DSO1000 series employs a new generation of high speed display technology that provides excellent signal clarity, fidelity and performance. The system noise floor is also lower than similar products in the industry. It comes with a minimum vertical input range of 500  $\mu\text{V}/\text{div}$ , an innovative digital trigger system with high sensitivity and low jitter, and a waveform capture rate of 400,000 frames/sec (sequence mode). The T3DSO1000 also employs a 256-level intensity grading display function and a color temperature display mode not found in other models in this class. Teledyne Test Tools latest oscilloscope offering supports multiple powerful triggering modes including serial bus triggering. Serial bus decoding for IIC, SPI, UART, CAN, LIN bus types is included. The models also include History waveform recording, and sequential triggering that enable extended waveform recording and analysis.

Another powerful addition is the new 1 million point FFT math function that gives the T3DSO1000 very high frequency resolution when observing signal spectra. The new digital design also includes a hardware co-processor that delivers measurements quickly and accurately without slowing acquisition and front-panel response. The features and performance of Teledyne Test Tools new T3DSO1000 cannot be matched in this price class.

The four channel series includes even more functions, including: searching and navigating, on-screen Bode plot, 16 digital channels (Option), an external USB powered 25 MHz AWG module (Option), a USB WIFI adapter (Option), and an embedded application that allows remote control via web browser.

## Key Features

- 100 MHz, 200 MHz bandwidth models
- Two channel series have one 1 GSa/s ADC, four channel series have two 1 GSa/s ADCs. When all channels are enabled, each channel has a maximum sample rate of 500 MSa/s. When a single channel per ADC is active, it has sample rate of 1 GSa/s
- The newest generation of high speed display technology
  - › Waveform capture rate up to 100,000 wfm/s (normal mode), and 400,000 wfm/s (sequence mode)
  - › Supports 256-level intensity grading and color display modes Record length up to 14 Mpts
  - › Digital trigger system
- Intelligent trigger: Edge, Slope, Pulse Width, Window, Runt, Interval, Time out (Dropout), Pattern
- Serial bus triggering and decoding (Standard), supports protocols IIC, SPI, UART, RS232, CAN, LIN
- Video trigger, supports HDTV
- Low background noise with voltage scales from 500  $\mu\text{V}/\text{div}$  to 10 V/div
- 10 types of one-button shortcuts, supports Auto Setup, Default, Cursors, Measure, Roll, History, Display/Persist, Clear Sweep, Zoom and Print Segmented acquisition (Sequence) mode, divides the maximum record length into multiple segments (up to 80,000), according to trigger conditions set by the user, with a very small dead time segment to capture the qualifying event.
- History waveform record (History) function, maximum recorded waveform length is 80,000 frames.


## Models and key Specification

Model	T3DSO1102 T3DSO1104	T3DSO1204
<b>Bandwidth</b>	100 MHz	200 MHz
<b>SamplingRate (Max.)</b>	Two channel series have a single 1 GSa/s ADC, four channel series have two 1 GSa/s ADCs. When all channels are enabled, each channel has a maximum sample rate of 500 MSa/s. When a single channel per pair is active, that channel has sample rate of 1 GSa/s	
<b>Channels</b>	4 (four channel series) 2+EXT (two channel series)	
<b>Memory Depth (Max.)</b>	7 Mpts/CH (not interleave mode); 14 Mpts/CH (interleave mode)	
<b>Waveform Capture Rate (Max.)</b>	100,000 wfm/s (normal mode), 400,000 wfm/s (sequence mode)	
<b>Trigger Type</b>	Edge, Slope, Pulse Width, Window, Runt, Interval, Dropout, Pattern, Video	
<b>Serial Trigger and decoder (Standard)</b>	IIC, SPI, UART/RS232, CAN, LIN	
<b>16 Digital Channels (four channel series only, option)</b>	Maximum waveform capture rate up to 1 GSa/s, Record length up to 14 Mpts/CH	
<b>USB AWG module (four channel series only, option)</b>	One channel, 25 MHz, sample rate of 125 MHz, wave length of 16 kpts	
<b>Bode plot ( four channel series only)</b>	Minimum start frequency of 10 Hz, minimum scan bandwidth of 500 Hz, maximum scan bandwidth of 120 MHz (dependent on Oscilloscope and AWG bandwidth), 500 maximum scan frequency points	
<b>USB WIFI adapter (four channel series only, option)</b>	802.11b/g/b, WPA-PSK, the adapter must be purchased separately by the scope user (TP-Link TL-WN725N)	
<b>I/O</b>	USB Host, USB Device, LAN, Pass/Fail, Trigger Out, Sbus (Teledyne Test Tools MSO)	
<b>Probe (Std)</b>	2/4 pcs passive probe T3PP300	2/4 pcs passive probe T3PP300
<b>Display</b>	7 inch TFT-LCD (800 x 480)	
<b>Weight</b>	Four channel series: Without package 2.6 Kg; With package 3.8 Kg Two channel series: Without package 2.5 Kg; With package 3.5 Kg	

- Automatic measurement function for 38 parameters as well as Measurement Statistics, Zoom, Gating, Math, History and Reference functions
- 1 Mpts FFT
- Math and measurement functions use all sampled data points (up to 14 Mpts)
- Math functions (FFT, addition, subtraction, multiplication, division, integration, differential, square root)
- Preset key can be customized for user settings or factory "defaults"
- Security Erase mode
- High Speed hardware based Pass/ Fail function
- MSO, 16 digital channels (four channel series only, option)
- Bode plot (four channel series only)
- Search and navigate (four channel series only)
- USB AWG module (four channel series only, option)
- USB WIFI adapter (four channel series only, option)
- Web Browser based control (four channel series only)
- Large 7 inch TFT-LCD display with 800 \* 480 resolution
- Multiple interface types: USB Host, USB Device (USB-TMC), LAN, Trigger Out
- Supports SCPI remote control commands
- Supports Multi-language display and embedded online help

# FUNCTION & CHARACTERISTICS

## 7 inch TFT-LCD display and 10 one-button menus

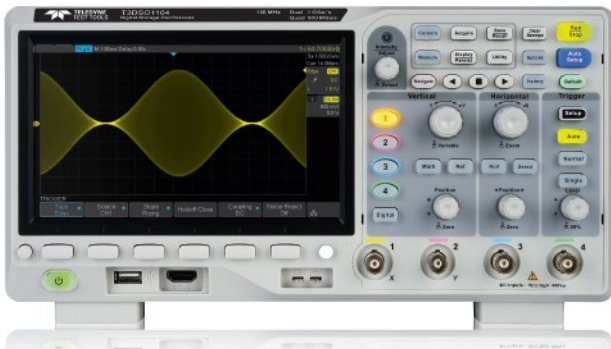


Front panel of the four channel series



Front panel of the two channel series



- 7-inch TFT-LCD display with 800 \* 480 resolution
- Most commonly used functions are accessible using 10 different one-button operation keys: Auto Setup, Default, Cursor, Measure, Roll, History, Persist, Clear
- Sweep, Zoom, Print

## Record Length of Up to 14 Mpts (single channel/pair mode), 7 Mpts/CH (two channels/ pair mode)

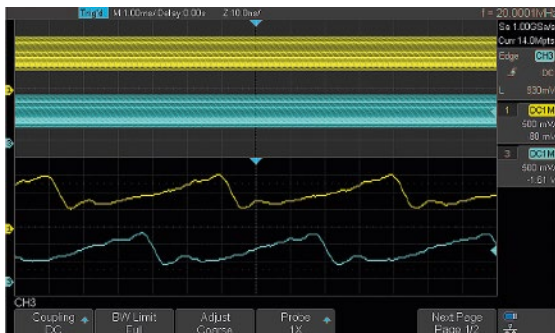

Using hardware-based Zoom technologies and max record length of up to 14 Mpts, users are able to over-sample to capture longer time periods at higher resolution and use the zoom feature to see more details within each signal.

When all channels are enabled, each channel has a maximum sample rate of 500 MSa/s. When a single channel per pair is active, that channel has sample rate of 1 GSa/s

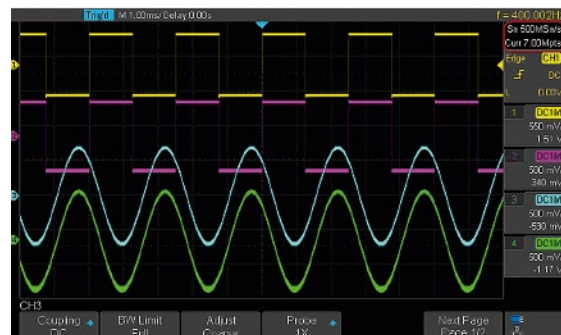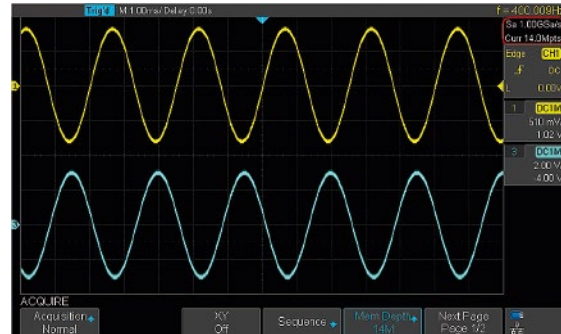

The four channel series has two 1 GSa/s ADC chips (channel 1 and 2 share one, channel 3 and 4 share another), so that each channel can achieve sample rates up to 500 MSa/s and work on bandwidths of 200 MHz when all channels are enabled.


## Waveform Capture Rate Up to 400,000 wfms/s




With a waveform capture rate of up to 400,000 wfms/s (sequence mode), the oscilloscope can easily capture the unusual or low-probability events.



## 256-Level Intensity Grading and Color Temperature Display

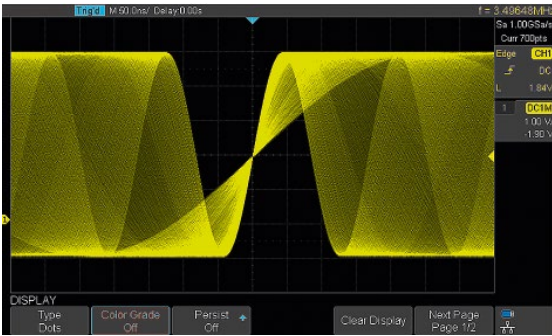


New display technology provides for fast refresh rates. The resulting intensity-graded trace is brighter for events that occur with more frequency and dims when the events occur with less frequency.

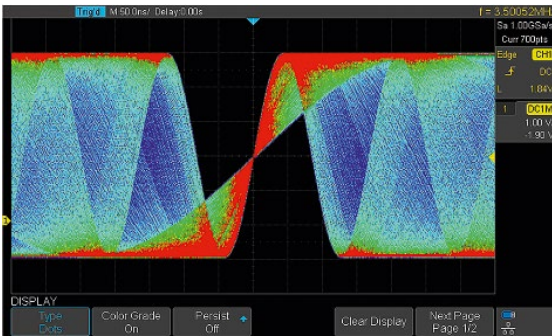


The color temperature display is similar to the intensity-graded trace function, but the trace occurrence is represented by different colors (color "temperature") as opposed to changes in the intensity of one color. Red colors represents the more frequent events, while blue is used to mark points that occur least frequently.

## Serial Bus Decoding Function (Standard)

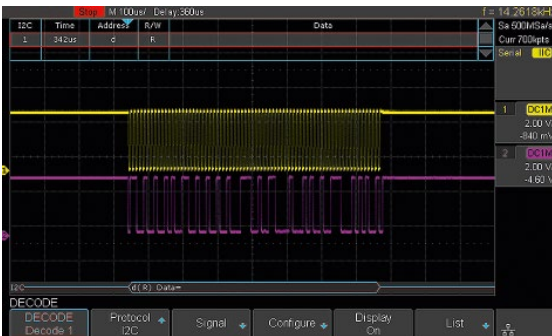


T3DSO1000 displays the decoding through the events list. Bus protocol information can be quickly and intuitively displayed in a tabular format.

## History Waveforms (History) Mode and Segmented Acquisition (Sequence)

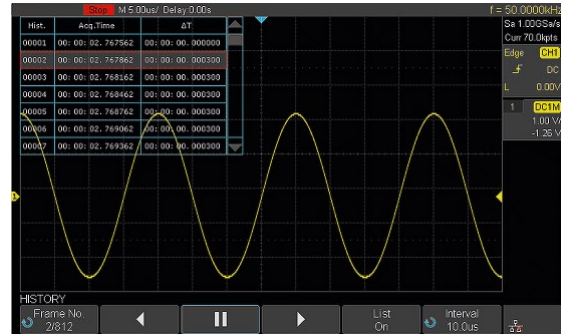

Playback the latest triggered events using the history function. Segmented memory collection will store trigger events into multiple (Up to 80,000) memory segments, each segment will store triggered waveforms and timestamp each frame.

## True measurement to 14 M points

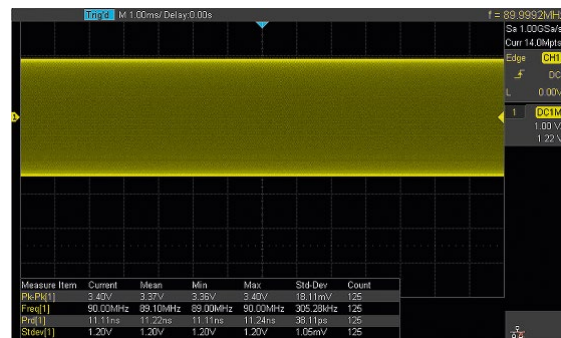

At any one timebase, T3DSO1000 can measure using all 14 M sample points. This ensures the accuracy of measurements while the math coprocessor decreases measurement time and increases ease-of-use.


## Gate and Zoom Measurement



Through Gate and Zoom measurement, the user can specify an arbitrary interval of waveform data analysis and statistics. This helps avoid measurement errors that can be caused by invalid or extraneous data, greatly enhancing the measurements' validity and flexibility.


# FUNCTION & CHARACTERISTICS

## 1 M points FFT

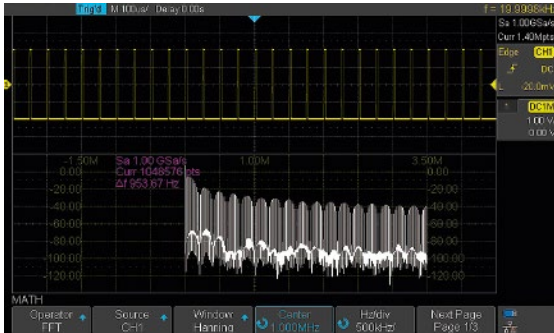


The new math co-processor enables FFT analysis of incoming signals using up to 1 M samples per waveform. This provides high frequency resolution with a fast refresh rate. The FFT function also supports a variety of window functions so that it can adapt to different spectrum measurement needs.

## Hardware-Based High Speed Pass/Fail function

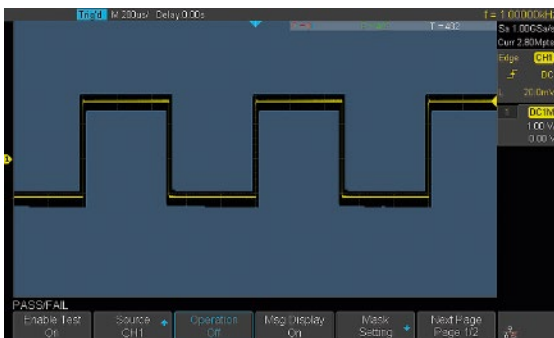


The T3DSO1000 utilizes a hardware-based Pass/Fail function, performing up to 40,000 Pass/Fail decisions each second. Easily generate user defined test templates provide trace mask comparison making it suitable for long-term signal monitoring or automated production line testing.

## Customizable Default Key

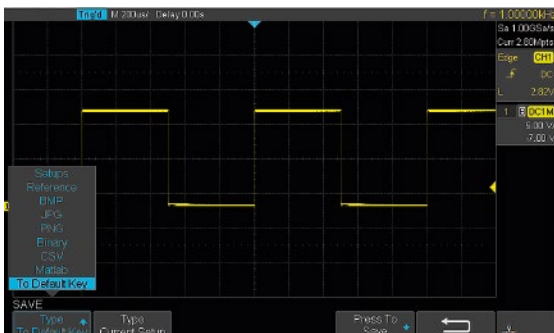



The current parameters of the oscilloscope can be preset to Default Key through the Save menu.

## 16 Digital Channels/MSO (four channel series only, option)

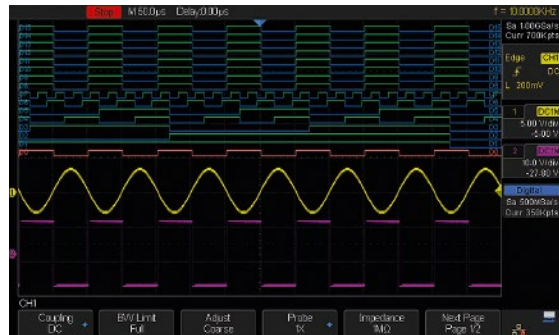

16 digital channels enables users to acquire and trigger on the waveforms then analyze the pattern, simultaneously with one instrument. Color coded logic levels clearly differentiate high and low states.



## Search and Navigate (four channel series only)

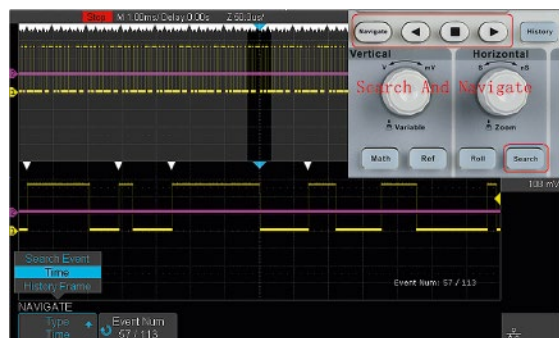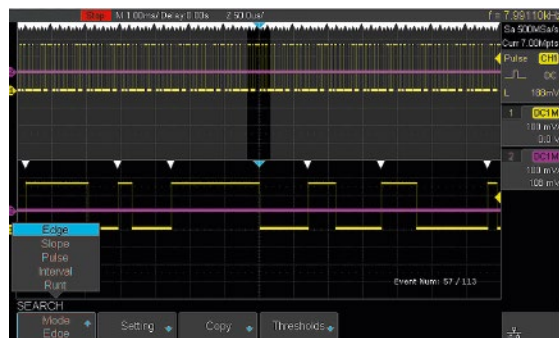

The T3DSO1000 4 channel series can search events specified by the user in a frame. It can also navigate by time (delay position) and historical frames.




## Bode Plot (four channel series only)

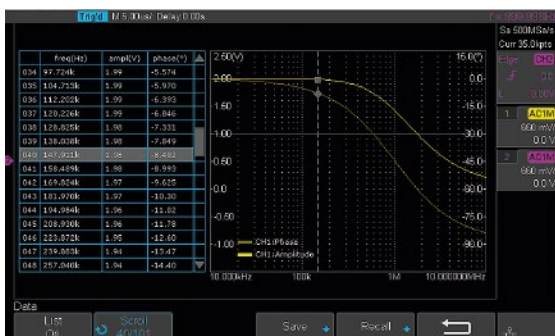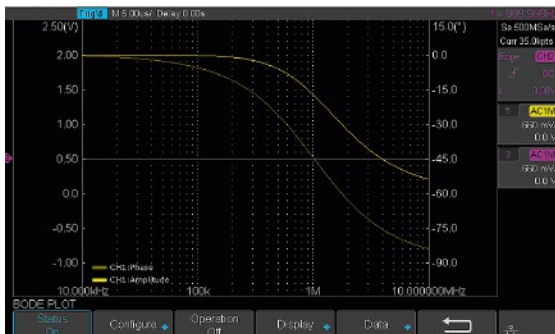

T3DSO1000 can control the USB AWG module, control an independent Teledyne Test Tools T3AFG instrument, scan an object's amplitude and phase frequency response, and display the data as a Bode Plot. It can also show the result lists, and export the data to a USB disk.

## USB WiFi Adapter (four channel series only, option)

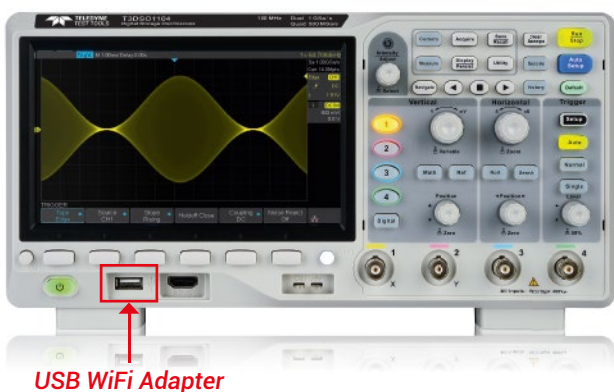

WiFi control of instrumentation can provide a convenient and safe method of configuring and collecting data. This new feature works with a Teledyne Test Tools approved WiFi adapter to provide wireless control and communications with Teledyne Test Tools 4 channel scopes. The approved adapter is the TP-Link TL-WN725N (not supplied).

## USB 25 MHz AWG Module (four channel series only, option)



The four channel series supports an optional USB 25 MHz function/arbitrary waveform generator that is operated from the USB host connection. Functions include Sine, Square, Ramp, Pulse, Noise, DC and 45 built-in waveforms. The arbitrary waveforms can be accessed and edited by the Teledyne Test Tools PC software.

## Complete Connectivity




Back panel of the four channel series



Back panel of the two channel series

T3DSO1000 supports USB Host, USB Device (USB-TMC), LAN(VXI-11), Pass/Fail and Trigger Out.

## Web control (four channel series only)

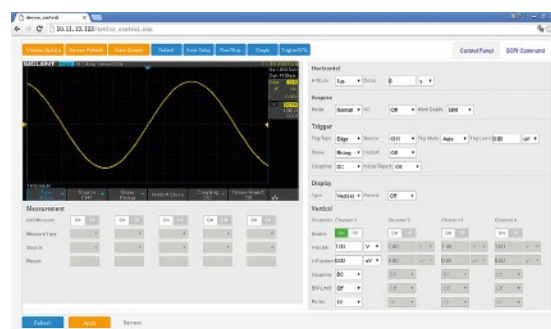

With the new embedded web server, users can control the 4 channel scopes from a simple web page. This provides remote troubleshooting and monitoring capabilities.



# SPECIFICATIONS

## Acquire System

Sampling Rate	1 GSa/s (single channel/pair), 500 MSa/s (two channels/pair)
Memory Depth	Max 14 Mpts/Ch (single channel/pair), 7 Mpts/Ch (two channels/pair)
Peak Detect	2 nsec (Four channel series) 4 nsec (Two channel series)
Average	Averages: 4, 16, 32, 64, 128, 256, 512, 1024
Eres	Enhance bits: 0.5, 1.5, 2, 2.5, 3; Selectable
Waveform interpolation	Sin(x)/x, Linear

## Input

Channels	4 (Four channel series) 2+EXT (Two channel series)
Coupling	DC, AC, GND
Impedance	DC: (1 M $\Omega$ $\pm$ 2 %)    (15 pF $\pm$ 2 pF) (Four channel series) DC: (1 M $\Omega$ $\pm$ 2 %)    (18 pF $\pm$ 2 pF) (Two channel series)
Max. Input voltage	1 M $\Omega$ $\leq$ 400 Vpk (DC + Peak AC $\leq$ 10 kHz)
CH to CH Isolation	DC-Max BW > 40 dB
Probe attenuation	0.1X, 0.2X, 0.5X, 1X, 2X, 5X, 10X.....1000X, 2000X, 5000X, 10000X

## Vertical System

Bandwidth (-3 dB)	200 MHz (T3DSO1204) 100 MHz (T3DSO1102 / T3DSO1104)
Vertical Resolution	8-bit
Vertical Scale (Probe 1X)	500 $\mu$ V/div – 10 V/div (1-2-5 sequence)
Offset Range (Probe 1X)	500 $\mu$ V – 150 mV: $\pm$ 2 V 152 mV – 1.5 V: $\pm$ 20 V
Bandwidth Limit	20 MHz $\pm$ 40% DC – 10% (BW): $\pm$ 1 dB
Bandwidth Flatness	10% – 50% (BW): $\pm$ 2 dB 50% – 100% (BW): + 2 dB/-3 dB
Low Frequency Response (AC -3 dB)	$\leq$ 10 Hz (at input BNC)
Noise	ST-DEV $\leq$ 0.5 division (< 1 mV/div) ST-DEV $\leq$ 0.2 division (< 2 mV/div) ST-DEV $\leq$ 0.1 division ( $\geq$ 2 mV/div)
SFDR including harmonics	$\geq$ 35 dB
DC Gain Accuracy	$\leq$ $\pm$ 3.0%: 5 mV/div – 10 V/div $\leq$ $\pm$ 4.0%: $\leq$ 2 mV/div
Offset Accuracy	$\pm$ (1% * Offset + 1.5% * 8 * div + 2 mV): $\geq$ 2 mV/div $\pm$ (1% * Offset + 1.5% * 8 * div + 500 $\mu$ V): $\leq$ 1 mV/div
Risetime	Typical 1.8 ns (T3DSO1204) Typical 3.5 ns (T3DSO1102 / T3DSO1104)
Overshoot (500 ps Pulse)	< 10%

## Horizontal System

Timebase Scale	1.0 ns/div – 100 s/div
Channel Skew	< 100 ps
Waveform Capture Rate	Up to 100,000 wfm/s (normal mode), 400,000 wfm/s (sequence mode)
Intensity grading	256 Levels
Display Format	Y-T, X-Y, Roll
Timebase Accuracy	$\pm$ 25 ppm
Roll Mode	50 ms/div – 100 s/div (1-2-5 step)

## Trigger System

Trigger Mode	Auto, Normal, Single
Trigger Level	Internal: $\pm 4.5$ div from the center of the screen EXT: $\pm 0.6$ V (Two channel series) EXT/5: $\pm 3$ V (Two channel series)
Holdoff Range	80 ns – 1.5 s
Trigger Coupling	AC DC LFRJ HFRJ Noise RJ
Coupling Frequency Response	DC: Passes all components of the signal AC: Blocks DC components and attenuates signals below 8 Hz LFRJ: Blocks the DC component and attenuates the low-frequency components below 2 MHz HFRJ: Attenuates the high-frequency components above 1.2 MHz
Coupling Frequency Response components below 10 KHz	DC: Passes all components of the signal LFRJ: Blocks the DC component and attenuates the low-frequency components below 10 KHz HFRJ: Attenuates the high-frequency components above 500 KHz
Trigger Sensitivity	Internal: $\pm 0.2$ div EXT (Two channel series): $\pm 0.4$ div
Trigger Jitter	DC – Max BW 0.6 div EXT (Two channel series): 200 mVpp DC – 10 MHz 300 mVpp 10 MHz – BW frequency EXT/5 (Two channel series): 1 Vpp DC – 10 MHz 1.5 Vpp 10 MHz – BW frequency
Trigger Displacement	Pre-Trigger: 0 – 100 % Memory Delay Trigger: 0 to 10,000 div

## Edge Trigger

Slope	Rising, Falling, Rising & Falling
Source	All channels/ EXT/ (EXT/5)/ AC Line (Two channel series) All channels/ AC Line (Four channel series)

## Slope Trigger

Slope	Rising, Falling
LimitRange	< , > , <> , > <
Source	All channels
TimeRange	2 ns – 4.2 s
Resolution	1 ns

## Pulse Trigger

Polarity	+wid , -wid
Limit Range	< , > , <> , > <
Source	All channels
Pulse Range	2 ns ~ 4.2 s
Resolution	1 ns

## Video Trigger

Signal Standard	NTSC, PAL, 720p/50, 720p/60, 1080p/50, 1080p/60, 1080i/50, 1080i/60, Custom
Source	All channels
Sync	Any, Select
Trigger condition	Line, Field

# SPECIFICATIONS

## Window Trigger

Window Type	Absolute, Relative
Source	All channels

## Interval Trigger

Slope	Rising, Falling
Limit Range	<, >, <>, ><
Source	All channels
Time Range	2 ns ~ 4.2 s
Resolution	1 ns

## Dropout Trigger

Timeout Type	Edge, State
Source	All channels
Slope	Rising, Falling
Time Range	2 ns ~ 4.2 s
Resolution	1 ns

## Runt Trigger

Polarity	+wid, -wid
Limit Range	<, >, <>, ><
Source	All channels
Time Range	2 ns ~ 4.2 s
Resolution	1 ns

## Pattern Trigger

Pattern Setting	Invalid, Low, High
Logic	AND, OR, NAND, NOR
Source	All channels
Limit Range	<, >, <>, ><
Time Range	2 ns ~ 4.2 s
Resolution	1 ns

## Serial Trigger

### I2C Trigger

Condition	Start, Stop, Restart, No Ack, EEPROM, 7 bits Address & Data, 10 bits Address & Data, Data Length
Source (SDA/SCL)	All channels
Data format	Hex
Limit Range	EEPROM: =, >, <
Data Length	EEPROM: 1 byte Addr & Data: 1 ~ 2 byte Data Length: 1 ~ 12 byte
R/W bit	Addr & Data: Read, Write, Don't care

### SPI Trigger

Condition	Data
Source (CS/CL/Data)	All channels
Data format	Binary
Data Length	4 ~ 96 bit
Bit Value	0, 1, X
Bit Order	LSB, MSB



<b>UART / RS232 Trigger</b>	
Condition	Start, Stop, Data, Parity Error
Source (RX/TX)	All channels
Data format	Hex
Limit Range	=, >, <
Data Length	1 byte
Data Width	5 bit, 6 bit, 7 bit, 8 bit
Parity Check	None, Odd, Even
Stop Bit	1 bit, 1.5 bit, 2 bit
Idle Level	High, Low
Baud (Selectable)	600/1200/2400/4800/9600/19200/38400/57600/115200 bit/s
(Custom)	300 bit/s ~ 334000 bit/s
<b>CAN Trigger</b>	
Condition	All, Remote, ID, ID + Data, Error
Source	All channels
ID	STD (11 bit), EXT (29 bit)
Data Format	Hex
Data Length	1~2 byte
Baud Rate (Selectable)	5 k/10 k/20 k/50 k/100 k/125 k/250 k/500 k/800 k/1 M bit/s
Baud Rate (Custom)	5 kbit/s ~ 1 Mbit/s
<b>LIN Trigger</b>	
Condition	Break, Frame ID, ID+Data, Error
Source	All channels
ID	1 byte
Data Format	Hex
Data Length	1 ~ 2 byte
Baud Rate (Selectable)	600/1200/2400/4800/9600/19200 bit/s
Baud Rate (Custom)	300 bit/s ~ 20 kbit/s

## Serial Decoder

<b>I2C Decoder</b>	
Signal	SCL, SDA
Address	7 bits, 10 bits
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
<b>SPI Decoder</b>	
Signal	SCL, MISO, MOSI, CS * NOTE 2 channel scopes can only use 2 signal identifiers
Edge Select	Rising, Falling
Idle Level	Low, High
Bit Order	MSB, LSB
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
<b>UART / RS232 Decoder</b>	
Signal	RX, TX
Data Width	5 bit, 6 bit, 7 bit, 8 bit
Parity Check	None, Odd, Even
Stop Bit	1 bit, 1.5 bit, 2 bit
Idle Level	Low, High
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
<b>CAN Decoder</b>	
Signal	CAN_H, CAN_L
Source	CAN_H, CAN_L, CAN_H-CAN_L
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
<b>LIN Decoder</b>	
LIN Specification Package Revision	Ver1.3, Ver2.0
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines

# SPECIFICATIONS

## Measurement

Source	All channels, All channels in Zoom, Math, All References, History		
Number of Measurements	Display 5 measurements at the same time		
Measurement Range	Screen region, Gate region		
<b>Measurement Parameters (38 Types)</b>			
<b>Vertical (Voltage)</b>	Max	Highest value in input waveform	
	Min	Lowest value in input waveform	
	Pk-Pk	Difference between maximum and minimum data values	
	Ampl	Difference between top and base in a bimodal signal, or between max and min in an unimodal signal	
	Top	Value of most probable higher state in a bimodal waveform	
	Base	Value of most probable lower state in a bimodal waveform	
	Mean	Average of all data values	
	Cmean	Average of data values in the first cycle	
	Stdev	Standard deviation of all data values	
	Cstd	Standard deviation of all data values in the first cycle	
	VRMS	Root mean square of all data values	
	Crms	Root mean square of all data values in the first cycle	
	FOV	Overshoot after a falling edge; (base-min)/Amplitude	
	FPRE	Overshoot before a falling edge; (max-top)/Amplitude	
	ROV	Overshoot after a rising edge; (max-top)/Amplitude	
	RPRE	Overshoot before a rising edge; (base-min)/Amplitude	
Level@X	the voltage value of the trigger point		
<b>Horizontal( Time)</b>	Period	Period for every cycle in waveform at the 50 % level, and positive slope	
	Freq	Frequency for every cycle in waveform at the 50 % level, and positive slope	
	+Wid	Width measured at 50 % level and positive slope	
	-Wid	Width measured at 50 % level and negative slope	
	Rise Time	Duration of rising edge from 10 – 90 %	
	Fall Time	Duration of falling edge from 90 – 10 %	
	Bwid	Time from the first rising edge to the last falling edge, or the first falling edge to the last rising edge at the 50 % crossing	
	+Dut	Ratio of positive width to period	
	-Dut	Ratio of negative width to period	
	Delay	Time from the trigger to the first transition at the 50 % crossing	
	Time@Level	Time from the trigger to each rising edge at the 50 % crossing. When Statistics is Off, it shows the time from the trigger to the last rising edge at the 50 % crossing. When Statistics is On, it shows the Current, Mean, Min, Max, Standard Deviation of time from the trigger to each rising edge at the 50 % crossing in multiple frames (number = Count).	
	<b>Delay</b>	Phase	Calculate the phase difference between two edges
		FRR	Time between the first rising edges of the two channels
FRF		Time from the first rising edge of channel A to the first falling edge of channel B	
FFR		Time from the first falling edge of channel A to the first rising edge of channel B	
FFF		Time from the first falling edge of channel A to the first falling edge of channel B	
LRR		Time from the first rising edge of channel A to the last rising edge of channel B	
LRF		Time from the first rising edge of channel A to the last falling edge of channel B	
LFR		Time from the first falling edge of channel A to the last rising edge of channel B	
LFF		Time from the first falling edge of channel A to the last falling edge of channel B	
Skew		Time of source A edge minus time of nearest source B edge	
Cursors		Manual : Time X1, X2, (X1-X2), (1/ΔT) Voltage Y1, Y2, (Y1-Y2) Track: Time X1, X2, (X1-X2)	
Statistics	Current, Mean, Min, Max, Stdev, Count		
Counter	Hardware 6 bit counter( channels are selectable)		

## Math Function

Operation	+ , - , * , / , FFT , d/dt , fdt , √
FFT window	Rectangular, Blackman, Hanning, Hamming, Flattop
FFT display	Full Screen, Split, Exclusive
Number of Decoders	2

## USB AWG Module (four channel series only, option)

Channel	1
Max. Output Frequency	25 MHz
Sampling Rate	125 MSa/s
Frequency Resolution	1 μHz
Frequency Accuracy	± 50 ppm
Vertical Resolution	14-bits
Amplitude Range	-1.5 ~ +1.5 V (50 Ω) -3 ~ +3 V (High-Z)
Waveform Type	Sine, Square, Ramp, pulse, Noise, DC and 45 built-in waveforms
Output impedance	50 Ω ± 2 %
Protection	Over-Voltage Protection, Current-Limiting Protection

## Sine

Frequency	1 μHz ~ 25 MHz
Offset Accuracy (10 kHz)	± (1 % * Offset Setting Value + 1 mVpp)
Amplitude flatness (10 kHz, 5 Vpp)	± 0.3 dB
SFDR	DC ~ 1 MHz -60 dBc 1 MHz ~ 5 MHz -55 dBc 5 MHz ~ 25 MHz -50 dBc
HD	DC ~ 5 MHz -50 dBc 5 MHz ~ 25 MHz -45 dBc

## Square/Pulse

Frequency	1 μHz ~ 10 MHz
Duty Cycle	1 % ~ 99 %
Rise/Fall time	< 24 ns (10 % ~ 90 %)
Overshoot (1 kHz, 1 Vpp, Typical)	< 3 % (typical 1 kHz, 1 Vpp)
Pulse Width	> 50 ns
Jitter	< 500 ps + 10 ppm

## Ramp

Frequency	1 μHz ~ 300 kHz
Linearity (Typical)	< 0.1 % of Pk-Pk (Typical, 1 kHz, 1 Vpp, 100 % Symmetry)
Symmetry	0 % ~ 100 % (Adjustable)

## DC

Offset range	± 1.5 V (50 Ω) ± 3 V (High-Z)
Accuracy	± ( offset  * 1 % + 3 mV)

## Noise

Bandwidth	> 25 MHz (-3 dB)
-----------	------------------

## Arbitrary Wave

Frequency	1 μHz ~ 5 MHz
Wave Length	16 kpts
Sampling Rate	125 MSa/s
Waveform Entry	EasyScope and USB-Stick



# SPECIFICATIONS

## Digital Channels (four channel series only, option)

No. of Channels	16
Max. Sampling Rate	1 GSa/s
Memory Depth	14 Mpts/CH
Min. Detectable Pulse Width	4 ns
Level Group	D0~D7, D8~D15
Level Range	-8 V ~ 8 V
Logic Type	TTL, CMOS, LVCMOS3.3, LVCMOS2.5, custom
Skew[2]	D0~D15: ±1 sampling interval Analog To Digital: ± (1 sampling interval +1 ns)

## I/O

Standard	USB Host, USB Device, LAN, Pass/Fail, Trigger Out
Pass/Fail	3.3 V TTL Output

## Display (Screen)

Display Type	7-inch TFT LCD
Display Resolution	800 × 480
Display Color	24 bit
Contrast (Typical)	500:1
Backlight	300 nit
Range	8 x 14 divisions

## Display (Waveform)

Display Mode	Dot, Vector
Persist Time	Off, 1 Sec, 5 Sec, 10 Sec, 30 Sec, Infinite
Color Display	Normal, Color
Screen Saver	1 min, 5 min, 10 min, 30 min, 1 hour, Off
Language	Simplified Chinese, Traditional Chinese, English, French, Japanese, Korean, German, Russian, Italian, Portuguese

## Environments

Temperature	Operating: 10 ~ +40 Non-operating: -20 ~ +60
Humidity	Operating: 85 % RH, 40 Deg C, 24 hours Non-operating: 85 % RH, 65 Deg C, 24 hours
Height	Operating: ≤ 3000 m Non-operating: ≤ 15,266 m
Electromagnetic Compatibility	2004/108/EC Execution Standard EN 61326-1:2006 EN 61000-3-2:2006 + A2:2009, EN 61000-3-3:2008
Safety	2006/95/EC Execution Standard EN 61010-1:2010 / EN 61010-2-030:2010

## Power Supply

Input Voltage	100 ~ 240 VAC, CAT II, Auto selection
Frequency	50/60/400 Hz
Power	25 W Max






## Mechanical (Four channel series)

Dimensions	Length: 312 mm / Width: 132.6 mm / Height: 151 mm
Weight	N.W: 2.6 kg; G.W: 3.8 kg

## Mechanical (Two channel series)

Dimensions	Length: 312 mm / Width: 134 mm / Height: 150 mm
Weight	N.W: 2.5 Kg; G.W: 3.5 Kg

## Probes and Accessories

Probe	Model	Picture	Description
Passive Probes	T3PP300		Passive Probe, Bandwidth: 300 MHz
Current Probes	T3CP50		Bandwidth: 50 MHz, Max. continuous current: 30 Arms, Peak current: 50 A Switch Ratio: 100 mV/A, 1 V/A, Accuracy: 1 V/A ( $\pm 1\%$ $\pm 1$ mA), 100 mV/A ( $\pm 1\%$ $\pm 10$ mA), DC 12 V/1.2 A power adapter
Differential Voltage Probes	T3DP7000		Bandwidth: 100 MHz Differential Range: 7000 V (DC + Peak AC), 100X/1000X, Accuracy: $\pm 2\%$ , DC 5 V/1 A USB adapter
High Voltage Probe	T3HVP100		Bandwidth: 40 MHz Voltage Range: DC 10 KV, AC (rms): 7 KV (sine), AC (Vpp): 20 KV (Pulse) 1000X, Accuracy: $\leq 3\%$
USB AWG Module	T3DSO1000-FGMOD		Output Sine, Square, Ramp, pulse, Noise, DC and 45 built-in waveforms. The arbitrary waveforms can be accessed and edited by the EasyScope PC software

## Ordering information

<b>Product Name</b>	T3DSO1102 100 MHz Two Channels	
	T3DSO1104 100 MHz Four Channels	
	T3DSO1204 200 MHz Four Channels	
<b>Standard Accessories</b>	USB Cable -1	
	Quick Start -1	
	Passive Probe -4 / 2	
	Certification -1	
	Power Cord -1	
<b>Optional Accessories</b>	16 Channel MSO Software (four channel series only)	T3DSO1000-MSO
	16 Channel Logic Analyzer Lead (four channel series only)	T3DSO1000-LS (Requires T3MSO1000 Software)
	AWG Software (four channel series only)	T3DSO1000-FG
	USB AWG Module Hardware (four channel series only)	T3DSO1000-FGMOD (Requires T3DSO1000-FG)
	WIFI Software (four channel series only)	T3DSO1000-WIFI
	High Voltage Probe	T3HVP100
	Current Probes	T3CP50
	Differential Probes	T3DP7000

# ABOUT TELEDYNE TEST TOOLS



## Company Profile

Teledyne LeCroy is a leading provider of oscilloscopes, protocol analyzers and related test and measurement solutions that enable companies across a wide range of industries to design and test electronic devices of all types. Since our founding in 1964, we have focused on creating products that improve productivity by helping engineers resolve design issues faster and more effectively. Oscilloscopes are tools used by designers and engineers to measure and analyze complex electronic signals in order to develop high-performance systems and to validate electronic designs in order to improve time to market.

The Teledyne Test Tools brand extends the Teledyne LeCroy product portfolio with a comprehensive range of test equipment solutions. This new range of products delivers a broad range of quality test solutions that enable engineers to rapidly validate product and design and reduce time-to-market. Designers, engineers and educators rely on Teledyne Test Tools solutions to meet their most challenging needs for testing, education and electronics validation.

## Location and Facilities

Headquartered in Chestnut Ridge, New York, Teledyne Test Tools and Teledyne LeCroy has sales, service and development subsidiaries in the US and throughout Europe and Asia. Teledyne Test Tools and Teledyne LeCroy products are employed across a wide variety of industries, including semiconductor, computer, consumer electronics, education, military/aerospace, automotive/industrial, and telecommunications.

Distributed by:

## Teledyne LeCroy (US Headquarters)

700 Chestnut Ridge Road  
Chestnut Ridge, NY, USA 10977-6499

Phone: 800-553-2769 or 845-425-2000  
Fax Sales: 845-578-5985  
Phone Support: 1-800-553-2769  
Email Sales: [contact.corp@teledynelecroy.com](mailto:contact.corp@teledynelecroy.com)  
Email Support: [support@teledynelecroy.com](mailto:support@teledynelecroy.com)  
Web Site: <http://teledynelecroy.com/>

## Teledyne LeCroy (European Headquarters)

**Teledyne LeCroy GmbH**  
Im Breitenspiel 11c  
D-69126 Heidelberg, Germany

Phone: +49 6221 82700  
Fax: +49 6221 834655  
Phone Service: +49 6221 8270 85  
Phone Support: +49 6221 8270 28  
Email Sales: [contact.gmbh@teledynelecroy.com](mailto:contact.gmbh@teledynelecroy.com)  
Email Service: [service.gmbh@teledynelecroy.com](mailto:service.gmbh@teledynelecroy.com)  
Email Support: [tlc.t3.appsupport.eu@teledyne.com](mailto:tlc.t3.appsupport.eu@teledyne.com)  
Web Site: <http://teledynelecroy.com/germany>

[teledynelecroy.com](http://teledynelecroy.com)



© 2018 Teledyne Test Tools is a brand and trademark of Teledyne LeCroy Inc. All rights reserved. Specifications, prices, availability and delivery subject to change without notice. Product brand or brand names are trademarks or requested trademarks of their respective holders.

T3 stands for Teledyne Test Tools.