



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION

Part No. : **TI.19.2113**

Product Name : 2dBi 915MHz ISM Band Dipole Terminal
Antenna, SMA(M) Hinge

Feature : High efficiency dipole terminal antenna
ROHS compliant



1. Introduction

TI.19 is a high performance 915MHz ISM band dipole omnidirectional antenna. The hinged design enables the antenna to be positioned at its most suitable angle. This antenna features a SMA(M) Plug Connector.


For a lot of antenna applications, such as Wi-Fi Hotspot or cellular Pico-cell, the antenna of the operator's device and the antenna of the user's remote device are not on the same horizontal level. The TI.19 has been designed with a butterfly shape radiation pattern, to help counteract this effect.

2. Specification


ELECTRICAL	
Frequency	902 ~ 928MHz
Peak Gain (bent)	2.5dBi
Peak Gain (straight)	2.4dBi
Average Gain (bent)	-1.0dBi
Average Gain (straight)	-0.9dBi
Efficiency (bent)	81%
Efficiency (straight)	82%
Impedance	50Ω
VSWR	< 1.9 : 1
Polarization	Linear
Radiation Pattern	Omnidirectional
Input Power	10 W
MECHANICAL	
Antenna Length	389 ± 5 mm
Antenna Diameter	13 ± 0.5 mm
Casing	TPU
Connector	SMA Male
ENVIRONMENTAL	
Temperature Range	-40°C to 85°C
Humidity	Non-condensing 65°C 95% RH

3. Antenna S11 Properties

3.1 Return Loss

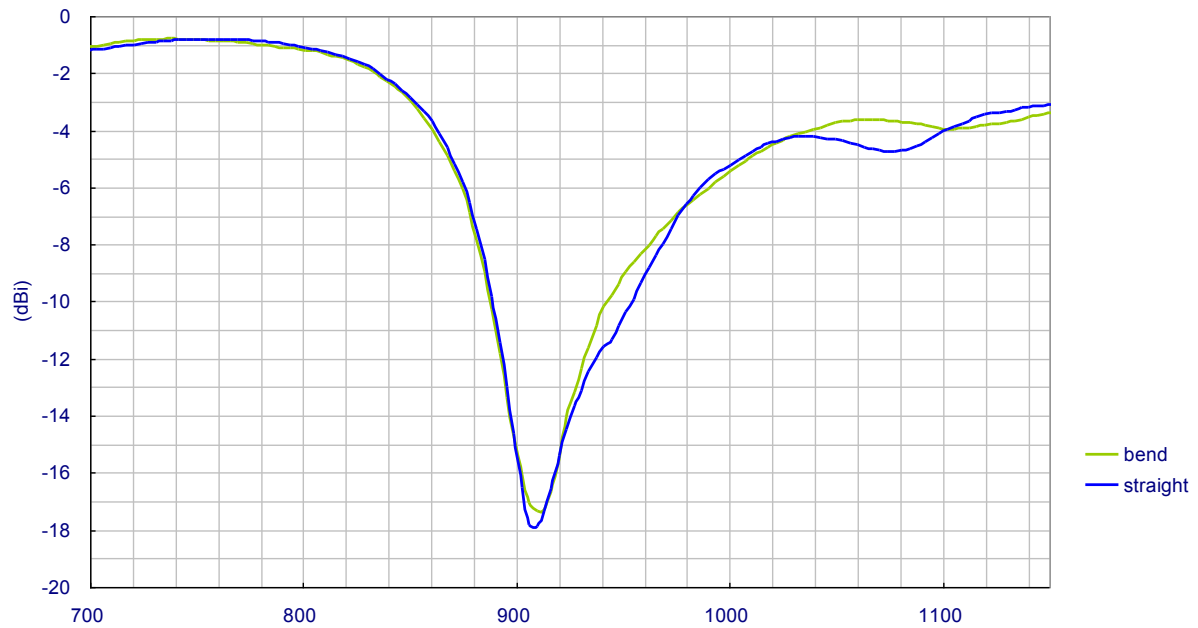


3.2 VSWR

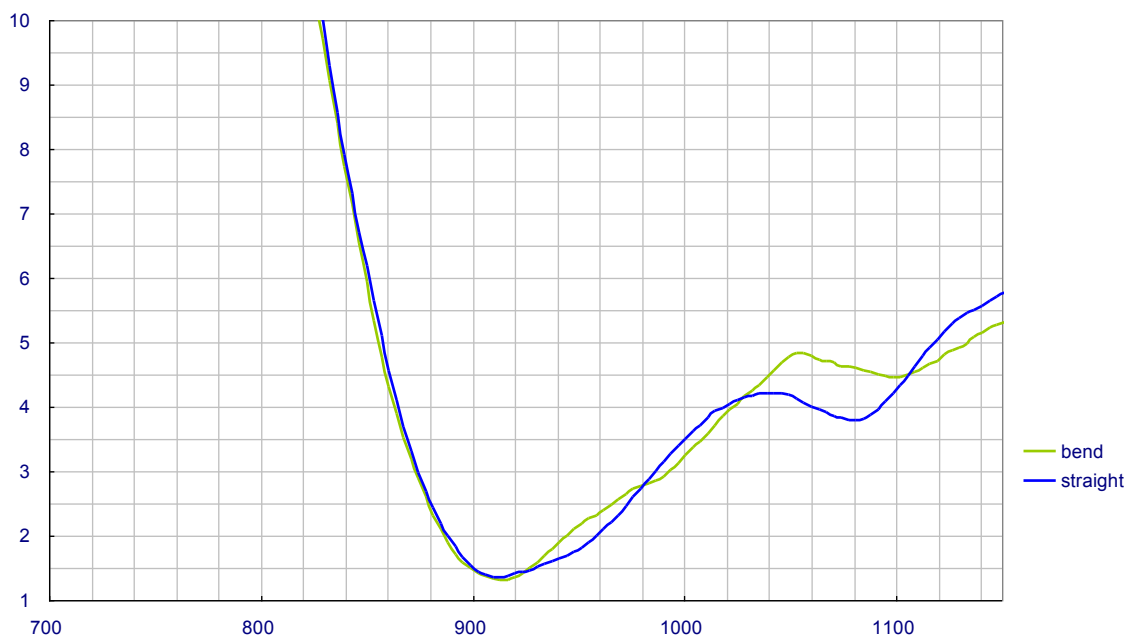


4. Antenna Radiation Properties


4.1. 3D Radiation Efficiency

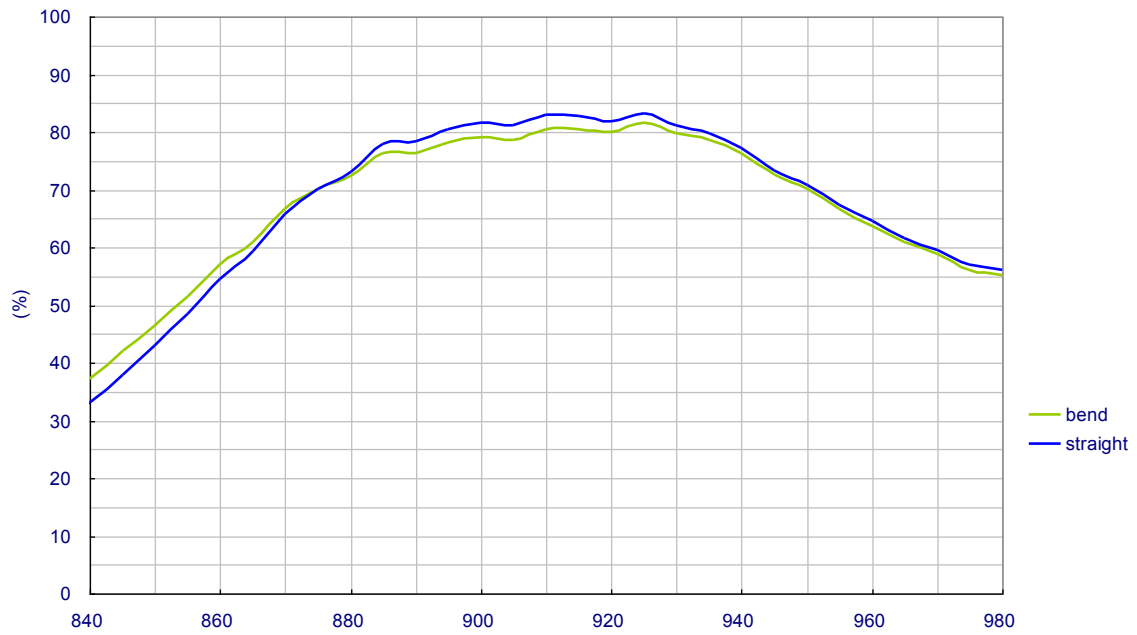


4.2. Peak Gain

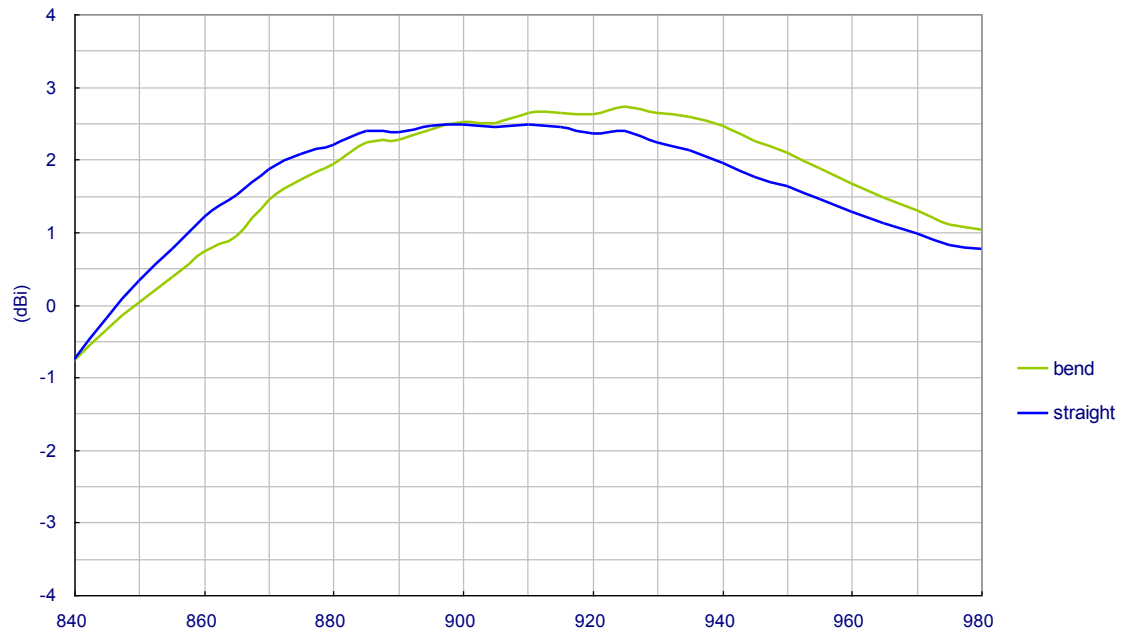


4.3. Average Gain

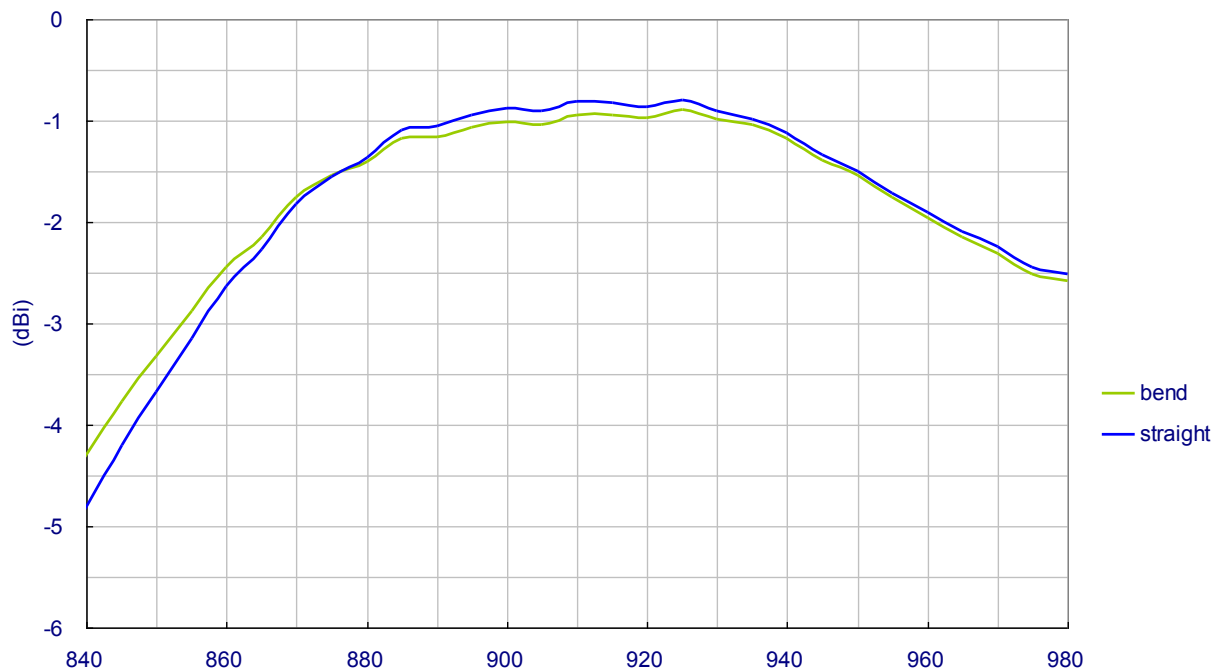


4.4. Radiation Pattern of 90 Degree Bent Position

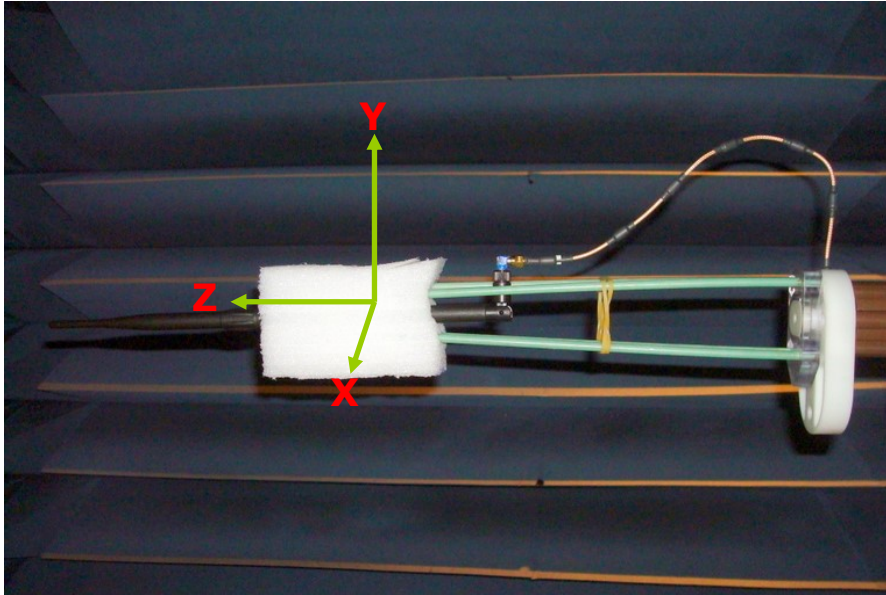


4.4.1 3D Radiation Pattern

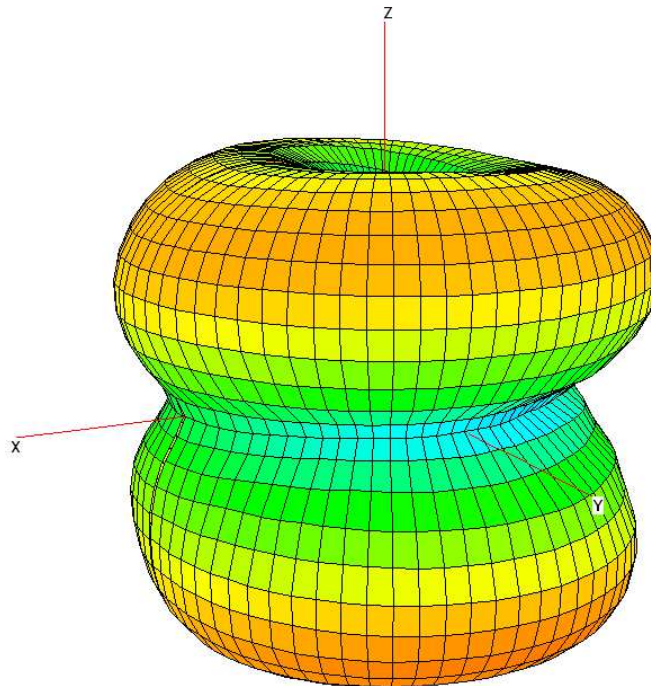


4.4.2 XZ Plane Radiation

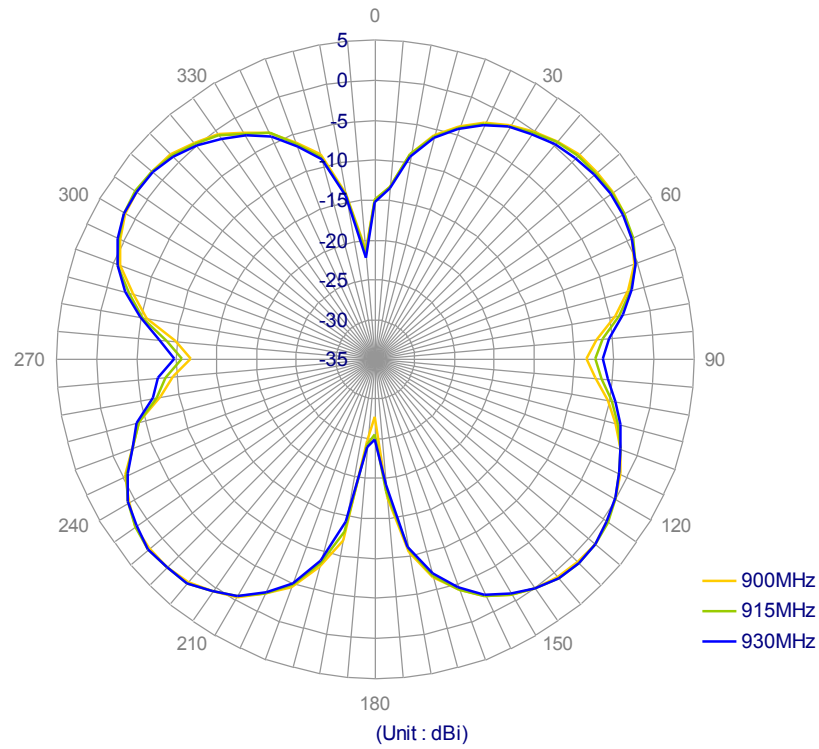


4.4.3 XY Plane Radiation

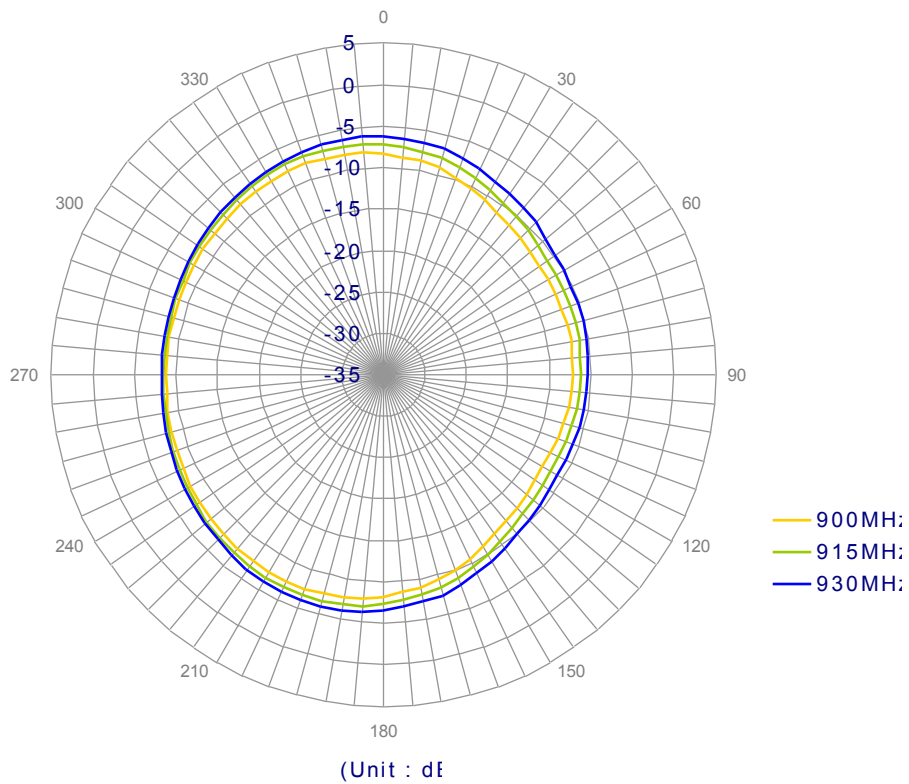


4.4.4 Radiation at 45 Degree from XY Plane

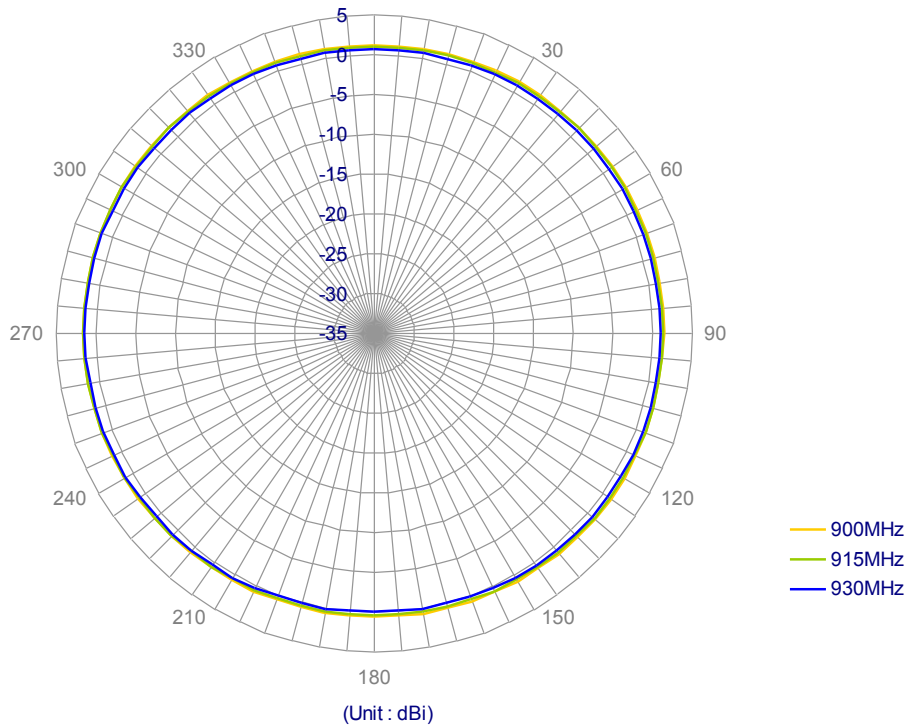


4.5. Radiation Pattern of 180 Degree Straight Position

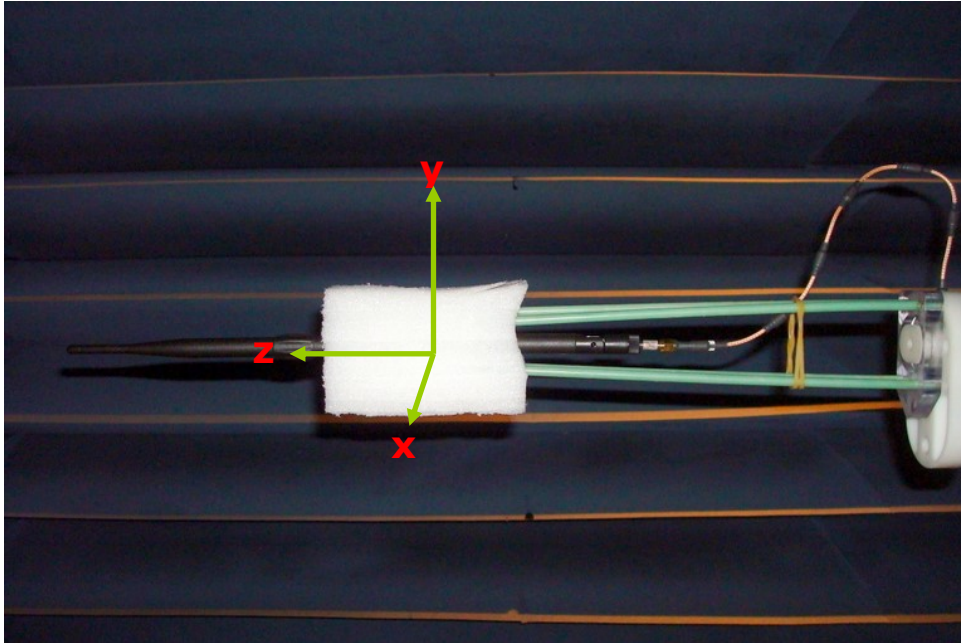


4.5.1 3D Radiation Pattern

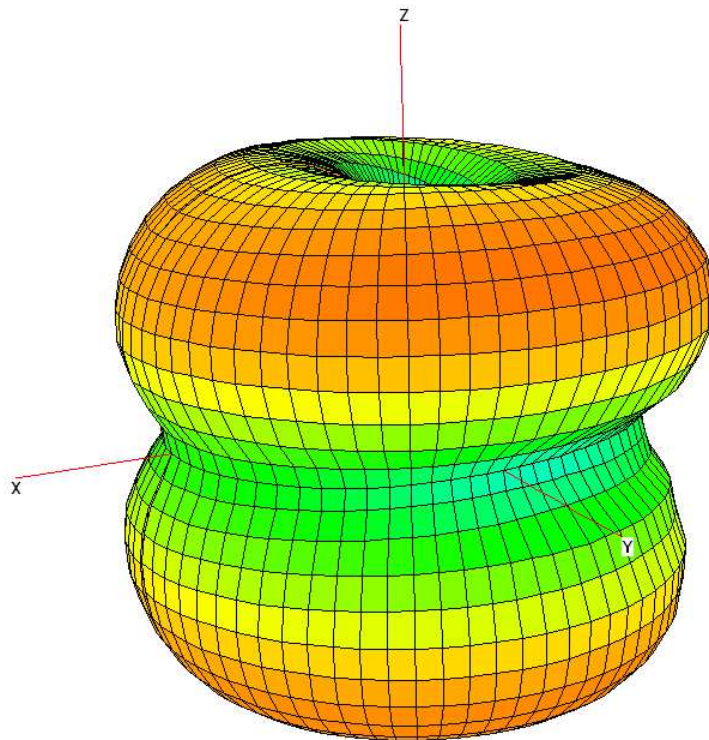


4.5.2 XZ Plane Radiation

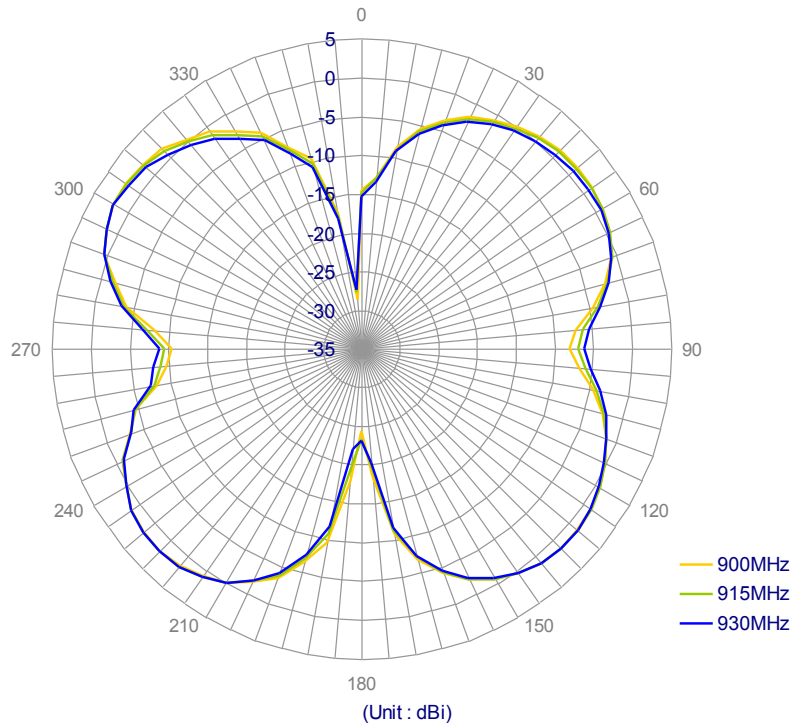

4.5.3 XY Plane Radiation

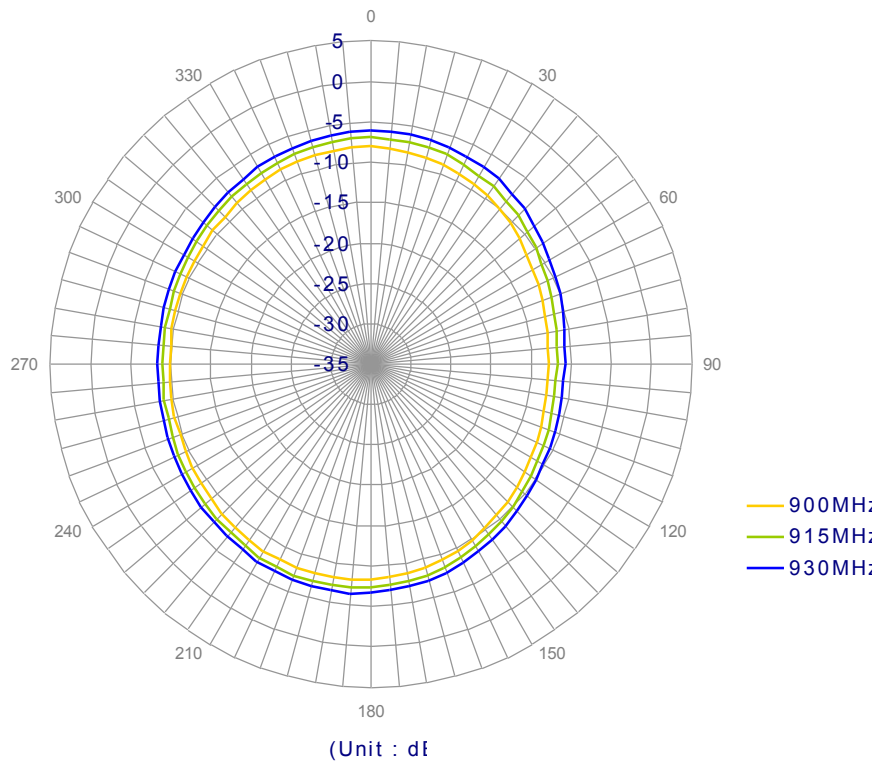

4.5.4 Radiation at 45 Degree from XY Plane

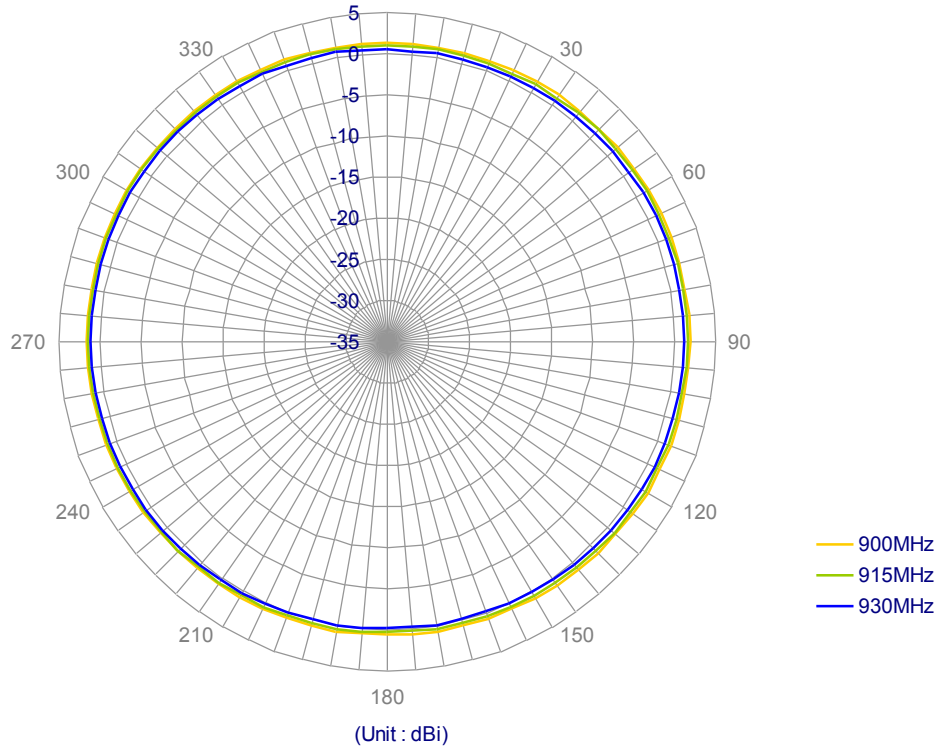


5. Ground Plane Effect

Three ground setups are used to see the affect of positioning TI.19 close to ground -


1. Small Ground (15*9cm) – common size of CPE devices. TI.19 is mounted at the longer edge for testing.
2. Big Ground Edge (45*30cm) – simulate the effect of mounting antenna on a base station device. TI.19 is mounted at the centre of the longer edge.
3. Big Ground Centre (45*30cm) – simulate the effect of mounting antenna in a centre of a big ground plane, such as vehicle top.

5.1. S11 Return Loss

Bent

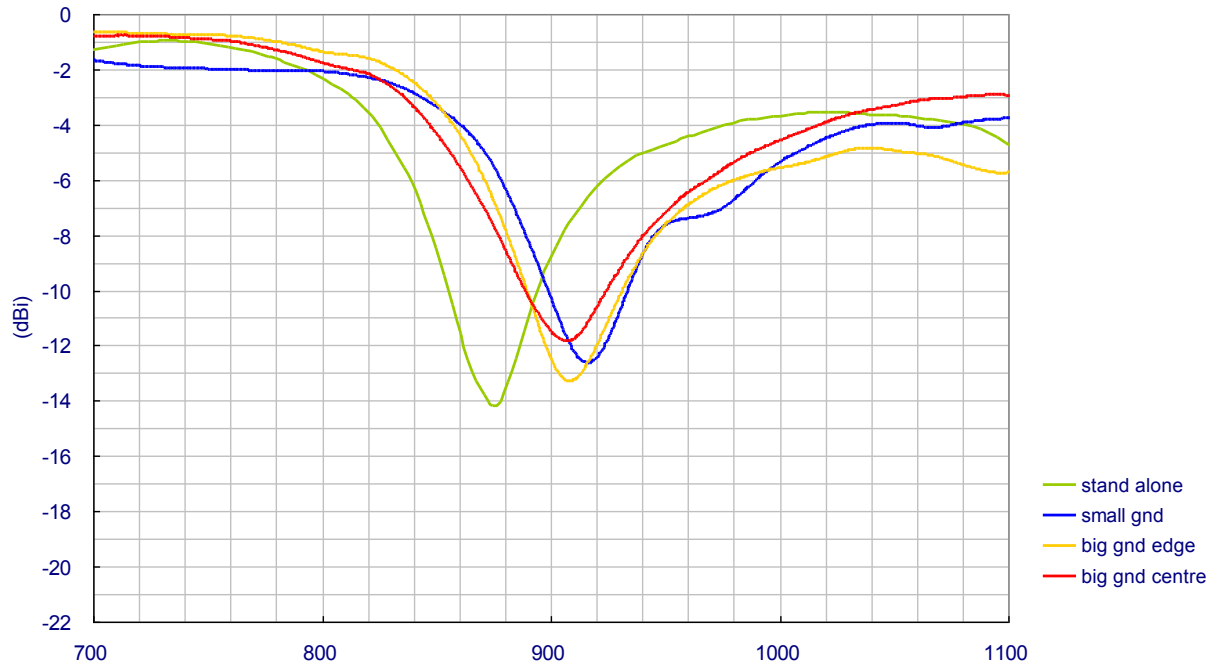


Straight

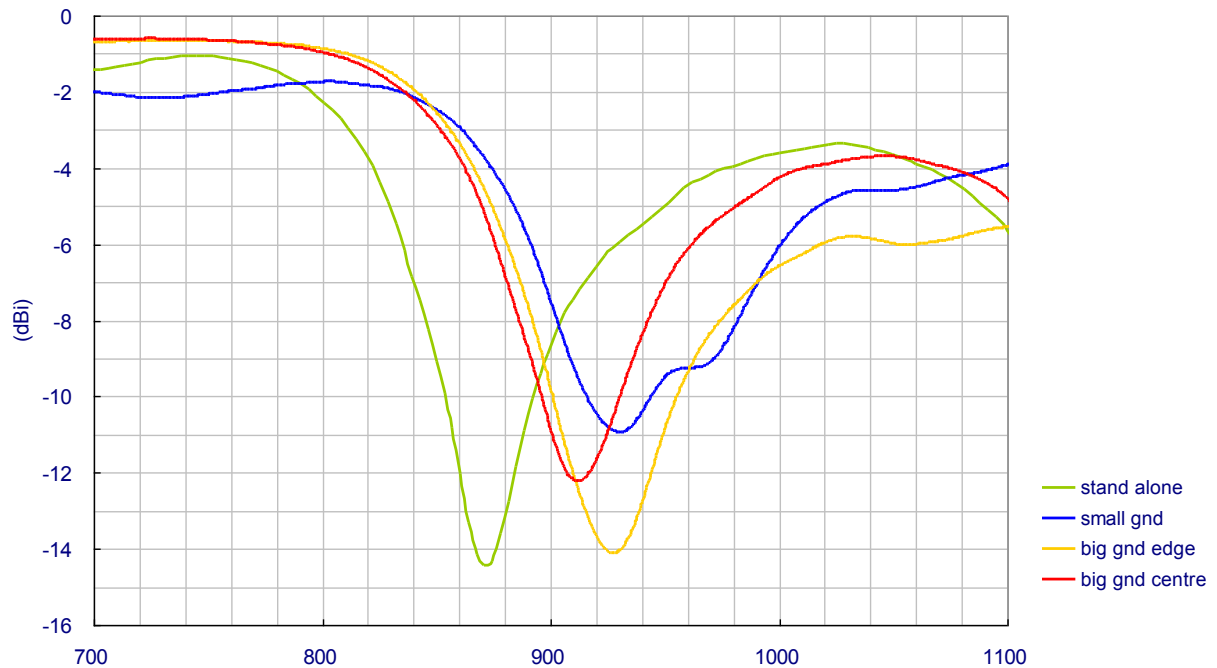


5.2. VSWR

Bent

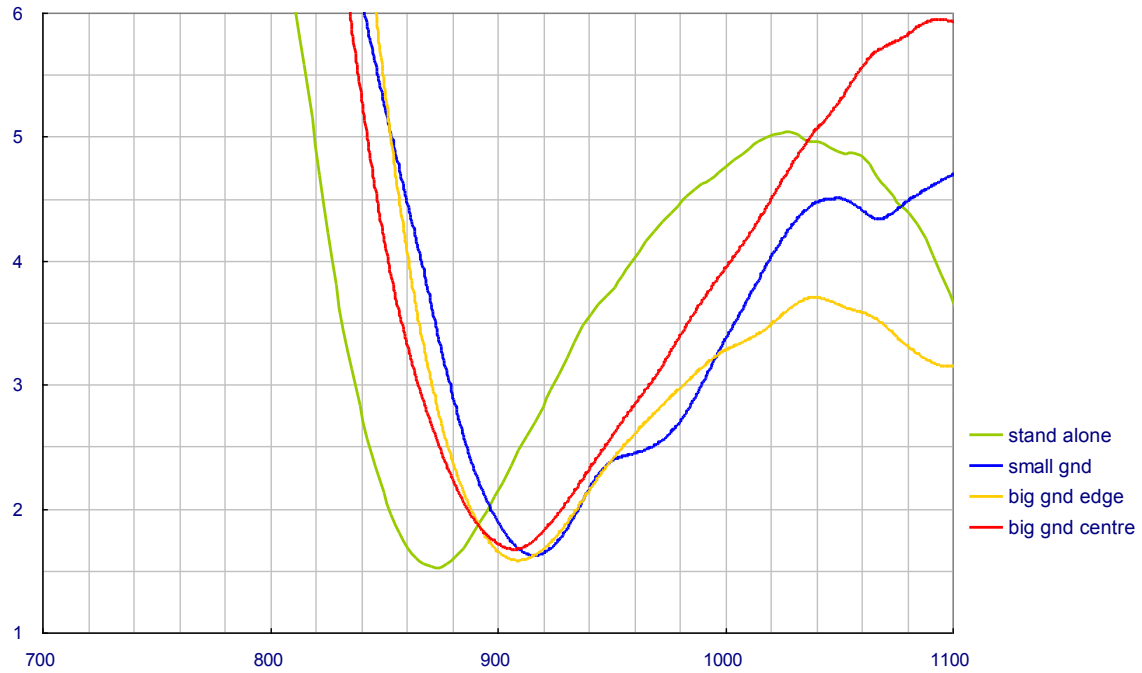


Straight

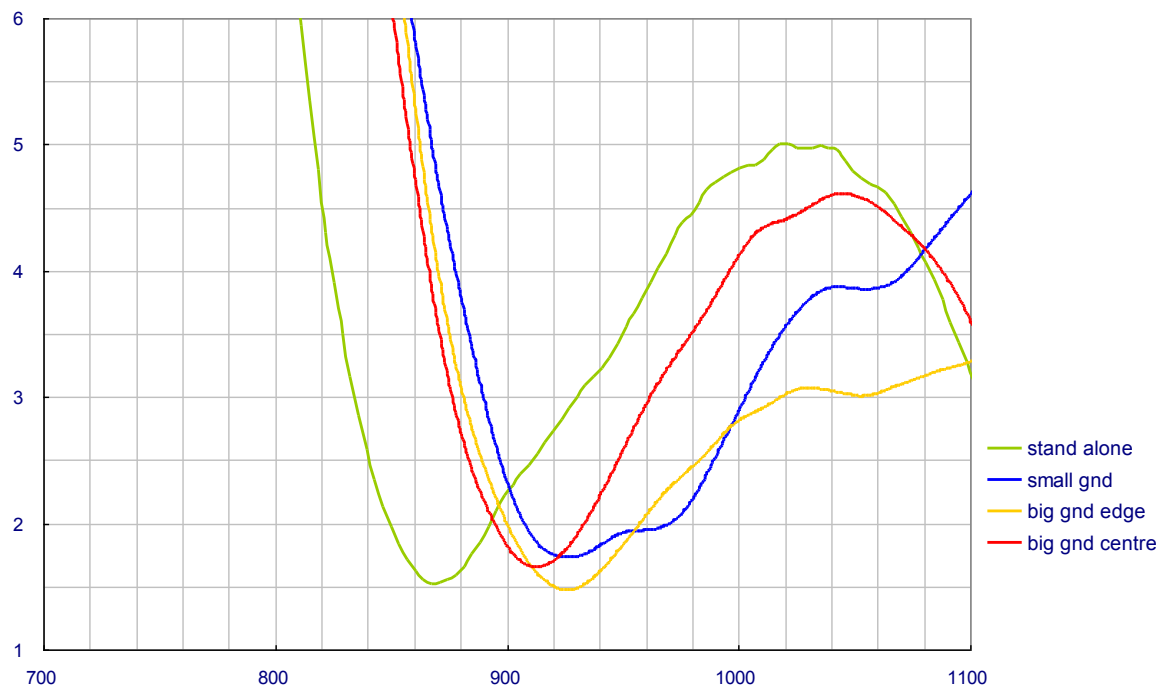


5.3. Radiation Efficiency

Bent

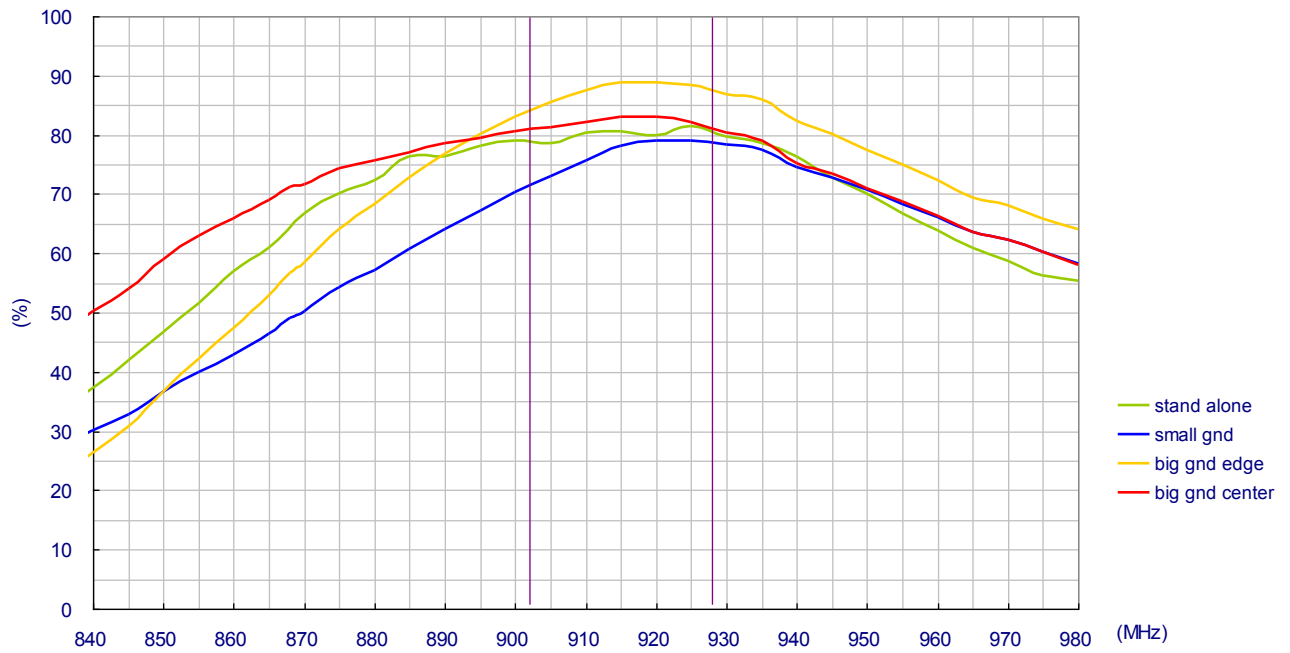


Straight

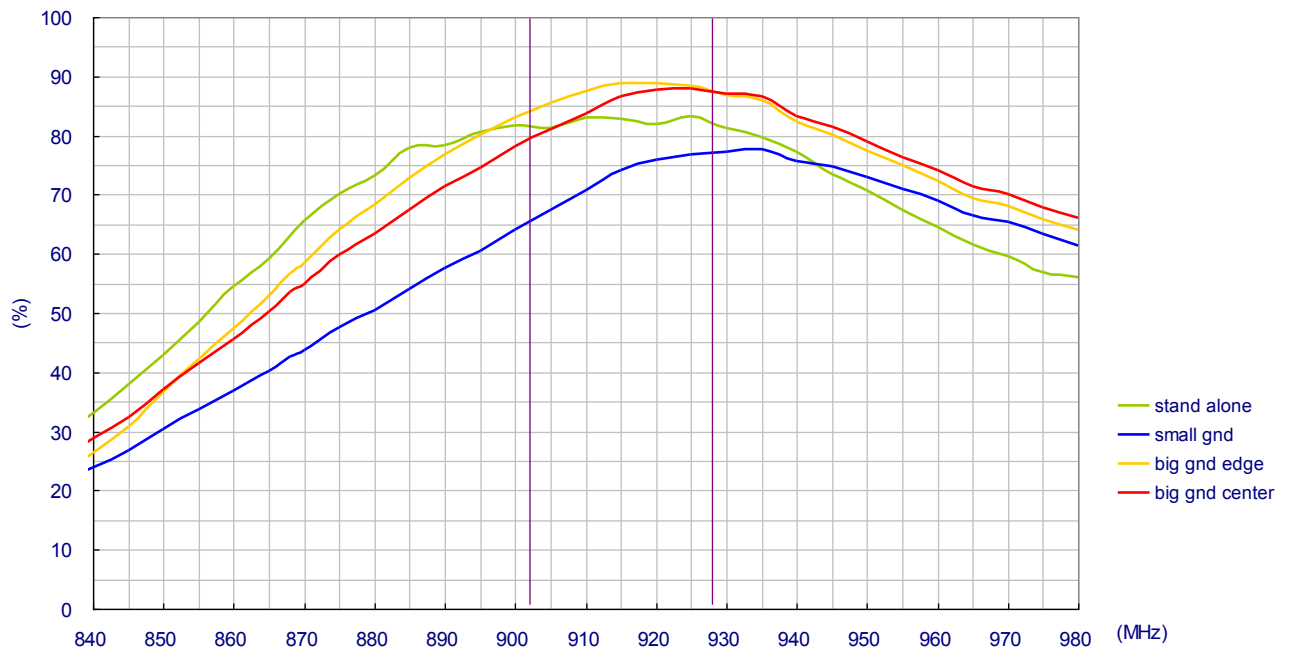


5.4. Average Gain

Bent

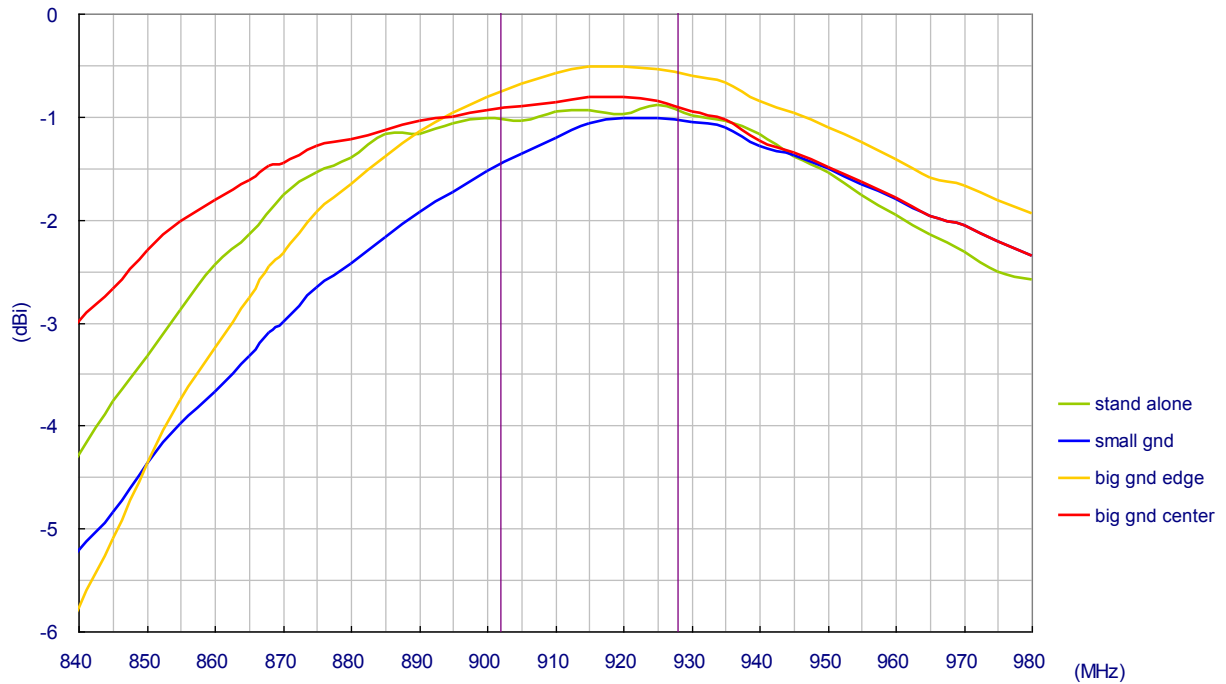


Straight

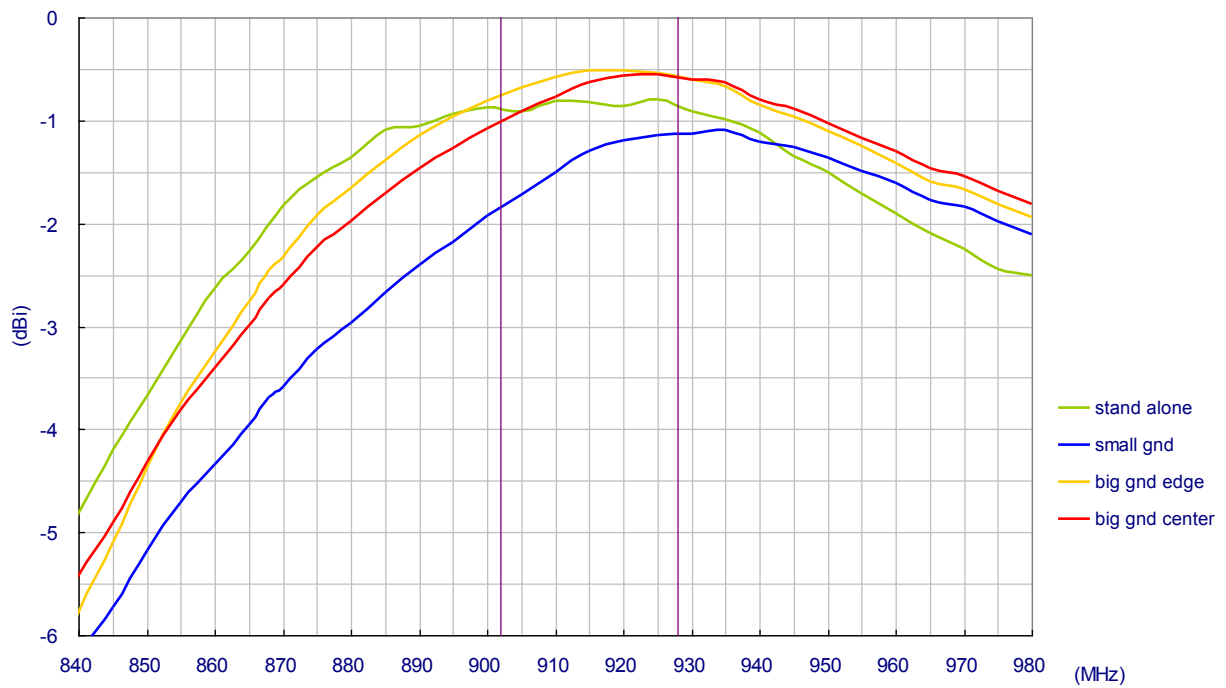


5.5. Peak Gain

Bent

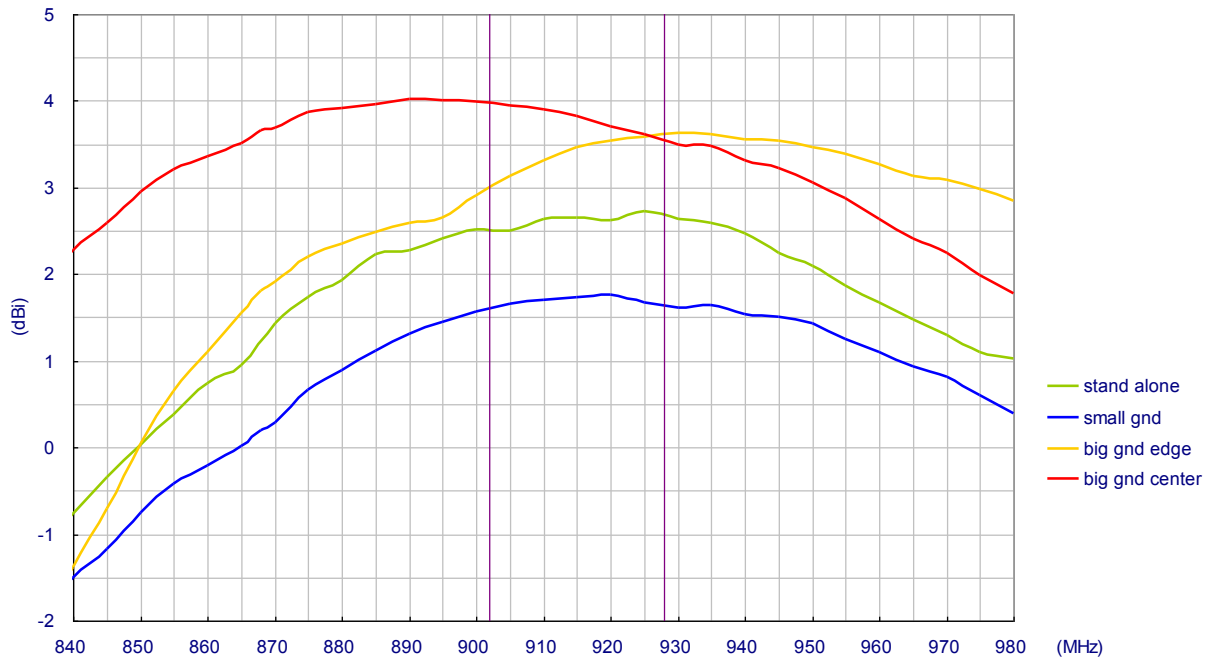


Straight

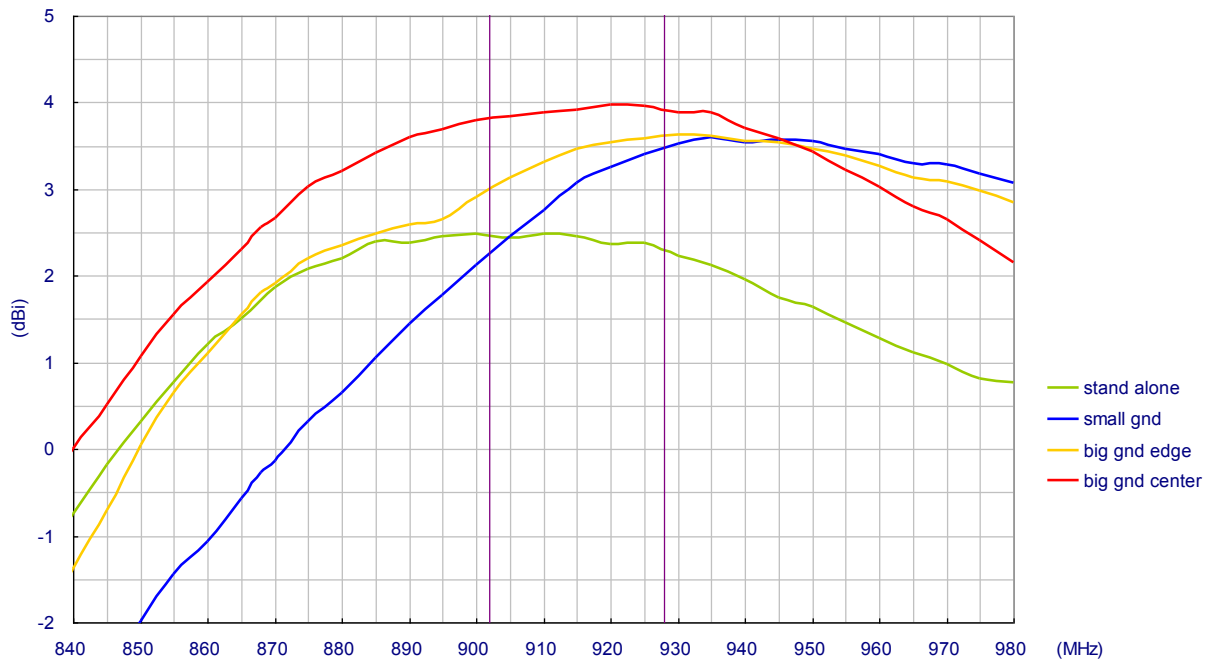


5.6. Radiation Pattern of 90 Degree Bent Position


5.6.1 XZ Plane Radiation

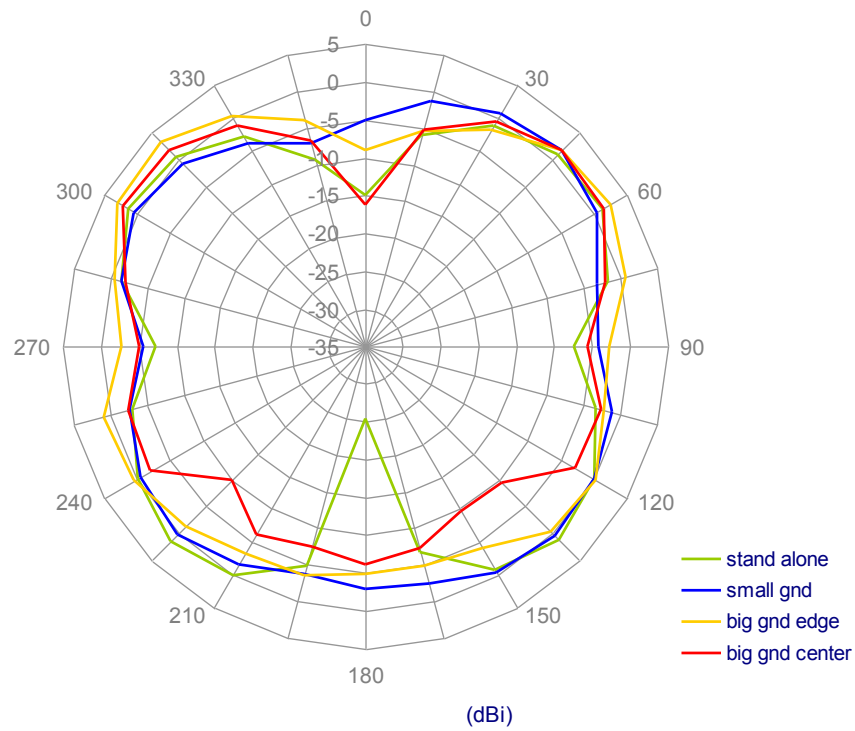

5.6.2 XY Plane Radiation

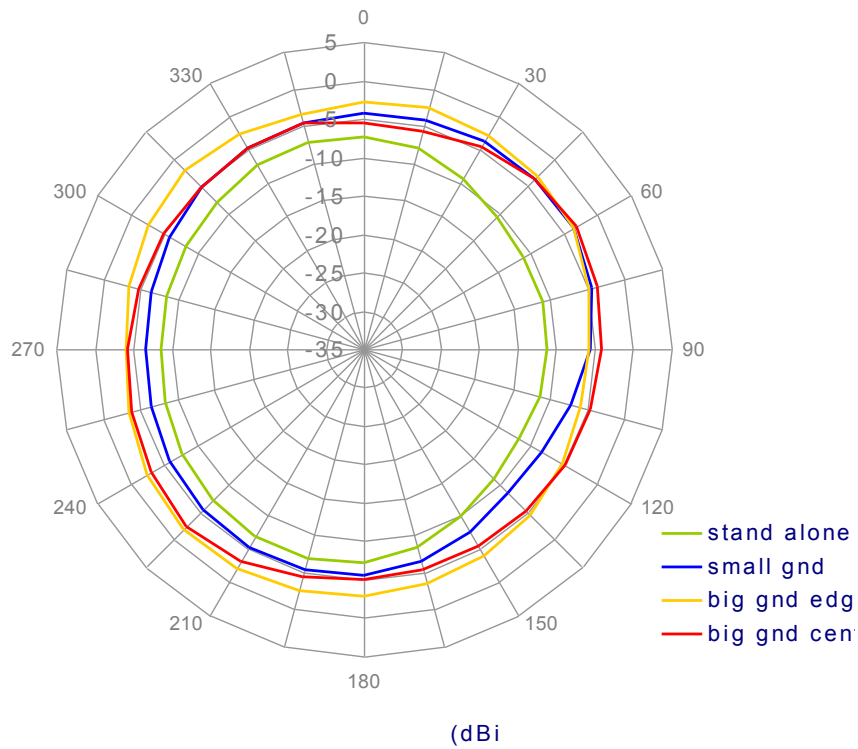


5.6.3 Radiation at 45 Degree from XY Plane

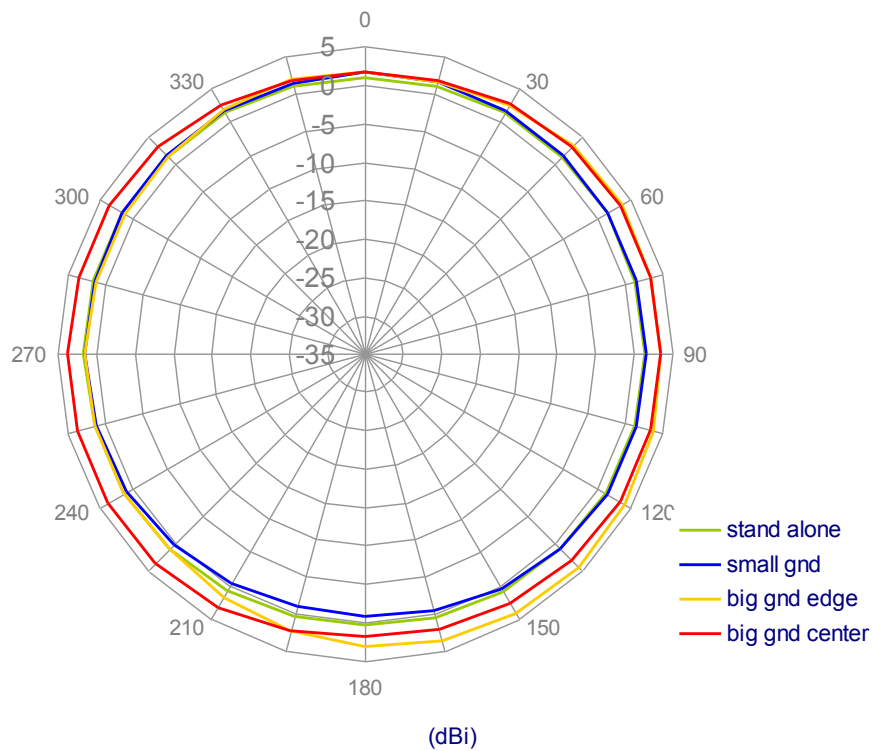


5.7. Radiation Pattern of 180 Degree Straight Position


5.7.1 XZ Plane Radiation

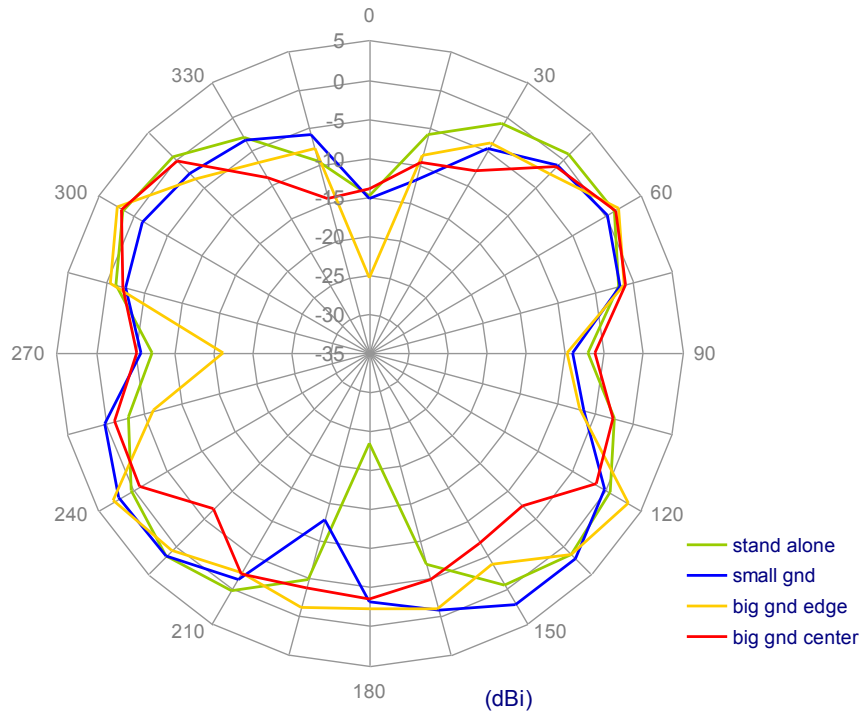


5.7.2 XY Plane Radiation

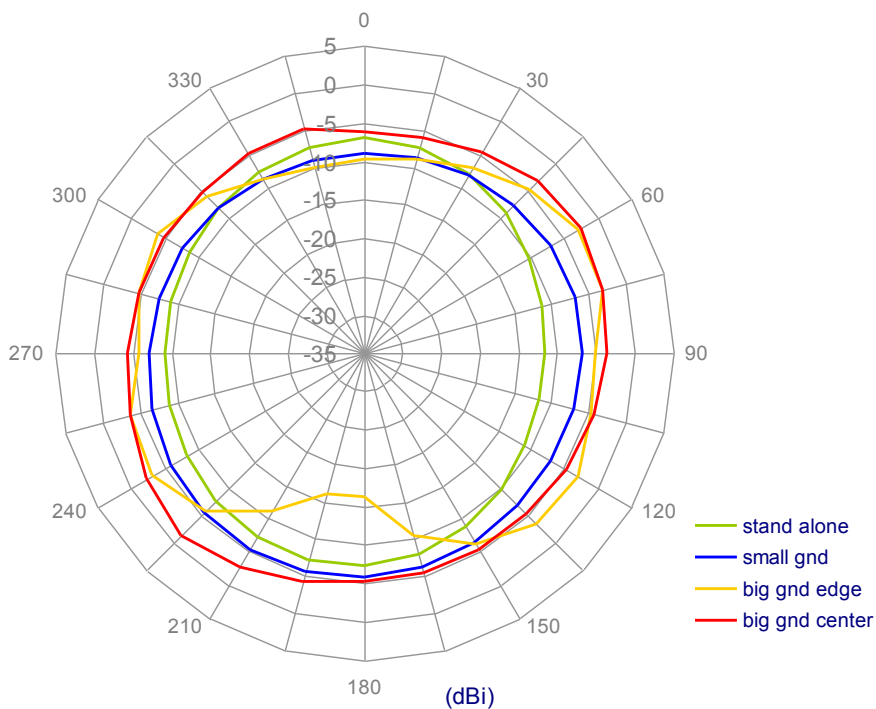

5.7.3 Radiation at 45 Degree from XY Plane

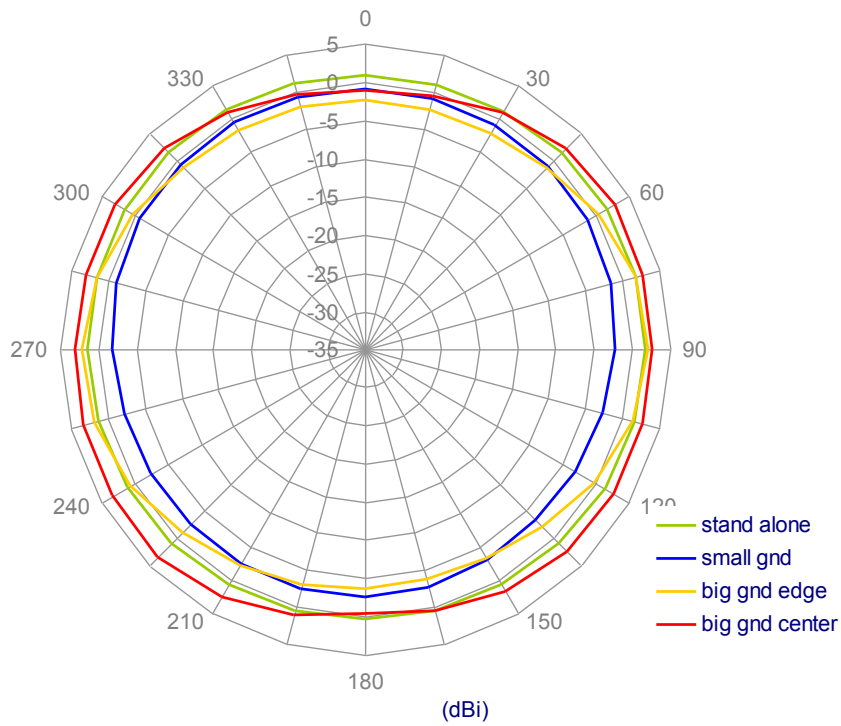

6. Mechanical Drawing (Unit: mm)

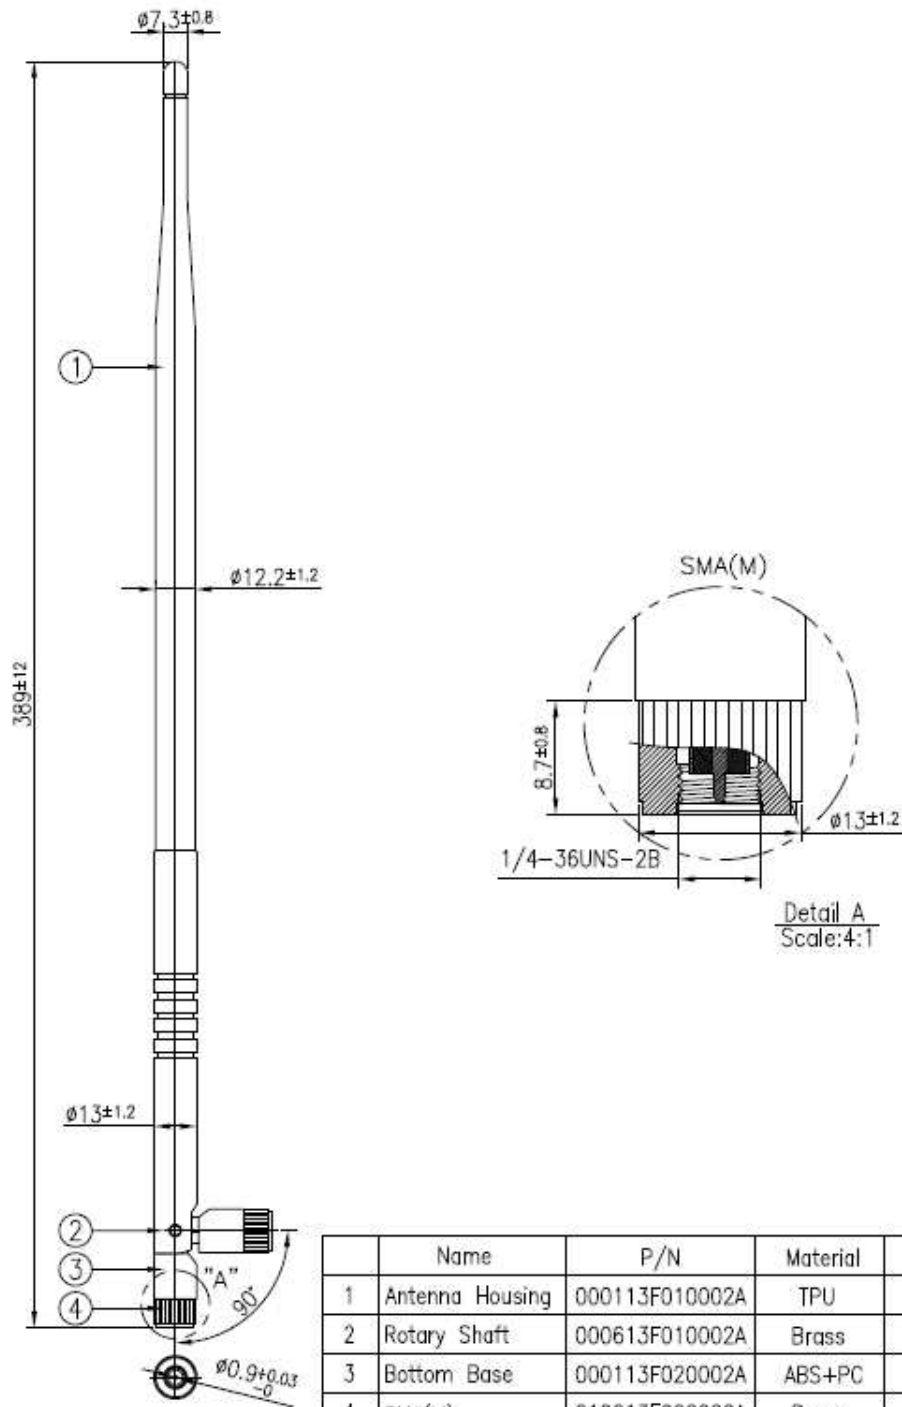

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein.

Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © Taoglas Ltd.