



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Network cable - VS-MSD-IP20-93E/10,0 - 1404303

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Assembled Ethernet cable, CAT5e, shielded, 2-pair, 26 AWG stranded (7-wire), RAL 5021 (water blue), M12 plug to RJ45 plug/IP20, line, length: 10 m



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 480.0 GRM |
| Custom tariff number | 85444210 |
| Country of origin | Poland |

Technical data

Dimensions

| | |
|-----------------|------|
| Length of cable | 10 m |
|-----------------|------|

Ambient conditions

| | |
|----------------------|-----------------------|
| Degree of protection | IP20 (RJ45 connector) |
| | IP67 (M12 connector) |

General data

| | |
|------------------------|--------------------------------|
| Number of positions | 4 |
| Signal type/category | Ethernet CAT5 (IEC 11801:2002) |
| | Ethernet CAT5e (TIA 568B:2001) |
| Surge voltage category | I |
| Pollution degree | 3 |

Characteristics head 1

| | |
|--|--------------------------|
| Head type | Plug Straight M12 / IP67 |
| No. of positions (pin connector pattern) | 4 |
| Coding | D (Data) |

Network cable - VS-MSD-IP20-93E/10,0 - 1404303

Technical data

Characteristics head 1

| | |
|---------------------------------|--|
| Color | black |
| Material (component) | CuZn (Contact) |
| | Ni/Au (Contact surface) |
| | TPU GF (Contact carriers) |
| | TPU, hardly inflammable, self-extinguishing (Grip) |
| | Zinc die-cast, nickel-plated (Screw connection) |
| Shielded | Yes |
| Insertion/withdrawal cycles | ≥ 100 |
| Torque | 0.4 Nm |
| Ambient temperature (operation) | -25 °C ... 90 °C |

Characteristics head 2

| | |
|--|---------------------------|
| Head type | Plug Straight RJ45 / IP20 |
| No. of positions (pin connector pattern) | 4 (8) |
| Color | Gray |
| Material (component) | CuSn (Contact) |
| | Ni/Au (Contact surface) |
| | PC (Contact carriers) |
| | PA (Housing) |
| Shielded | Yes |
| Insertion/withdrawal cycles | ≥ 750 |
| Ambient temperature (operation) | -40 °C ... 60 °C |

Cable

| | |
|------------------------------------|--|
| Cable type | PUR ETHERNET 2x2 FLEX |
| Cable type (abbreviation) | 93E |
| UL AWM style | 20963 (80°C/30 V) |
| Signal type/category | Ethernet CAT5 (IEC 11801:2002), 100 Mbps |
| | Ethernet CAT5e (TIA 568B:2001), 100 Mbps |
| Cable structure | 2x2xAWG26/7; SF/UTP |
| Conductor cross section | 2x 2x 0.14 mm ² |
| AWG signal line | 26 |
| Conductor structure signal line | 7x 0.16 mm |
| Core diameter including insulation | 0.98 mm |
| Wire colors | white/orange-orange, white/green-green |
| Twisted pairs | 2 cores to the pair |
| Overall twist | Two pairs with two fillers to the core |
| Shielding | Aluminum-coated foil, tinned copper braided shield |

Network cable - VS-MSD-IP20-93E/10,0 - 1404303

Technical data

Cable

| | |
|---|---|
| Optical shield covering | 70 % |
| External sheath, color | water blue RAL 5021 |
| External cable diameter D | 6.4 mm ±0.2 mm |
| Minimum bending radius, fixed installation | 4 x D |
| Minimum bending radius, flexible installation | 8 x D |
| Tensile strength short-term/long-term | ≤ 80N |
| Cable weight | 42 kg/km |
| Outer sheath, material | PUR |
| Material conductor insulation | Foamed PE |
| Conductor material | Bare Cu litz wires |
| Insulation resistance | ≥ 500 MΩ*km (at 20 °C) |
| Conductor resistance | ≤ 290000000 Ω/km (at 20 °C) |
| Working capacitance | 45 nF (At 1 kHz) |
| Wave impedance | 100 Ω ±5 Ω (at 100 MHz) |
| Signal runtime | 5.3 ns/m |
| Nominal voltage, cable | ≤ 100 V |
| | 300 V (Outer cable sheath) |
| Test voltage Core/Core | 700 V (50 Hz, 1 min.) |
| Test voltage Core/Shield | 700 V (50 Hz, 1 min.) |
| Flame resistance | IEC 60332-1-2 |
| Halogen-free | According to IEC 60754-1 |
| Resistance to oil | in accordance with DIN EN 60811-2-1 |
| Ambient temperature (operation) | -40 °C ... 80 °C (cable, fixed installation) |
| | -20 °C ... 80 °C (cable, flexible installation) |
| Ambient temperature (installation) | -20 °C ... 80 °C |
| Ambient temperature (storage/transport) | -20 °C ... 80 °C |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27060390 |
| eCl@ss 7.0 | 27060390 |
| eCl@ss 8.0 | 27060390 |

Network cable - VS-MSD-IP20-93E/10,0 - 1404303

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000830 |
| ETIM 4.0 | EC000830 |
| ETIM 5.0 | EC000830 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 26121609 |
| UNSPSC 7.0901 | 26121609 |
| UNSPSC 11 | 26121609 |
| UNSPSC 12.01 | 26121609 |
| UNSPSC 13.2 | 26121609 |

Approvals

Approvals


Approvals

GOST

Ex Approvals

Approvals submitted


Approval details

| |
|--|
| GOST  |
|--|

Drawings

Network cable - VS-MSD-IP20-93E/10,0 - 1404303

Schematic diagram




Pin assignment M12 male connector, 4-pos., D-coded, male side

Cable cross section




PUR ETHERNET 2x2 FLEX [93E]

Dimensioned drawing

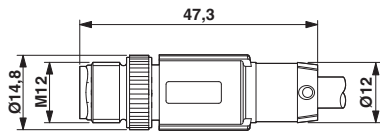


Plug, M12 x 1, straight, shielded

Dimensioned drawing

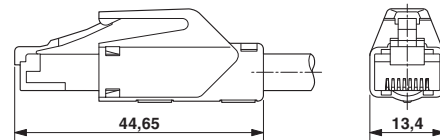


RJ45 connector, IP20

Circuit diagram

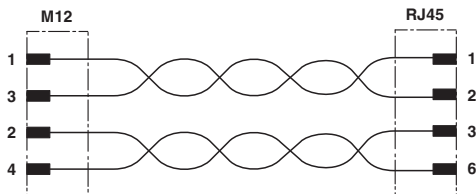

Schematic diagram

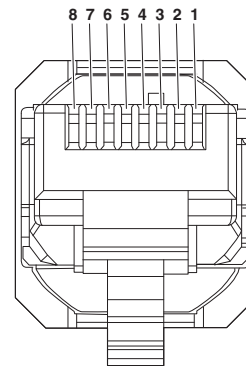

Connector pin assignment plug RJ45