



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Fused Disconnect Switch

TP158HC

TP158HC

Fused Disconnect Switch

For use with Telpower® Fuses Type TPL-B.

Ampere Ratings: 70-250A

Voltage Rating: 80Vdc

UL Withstand Rating: 100,000A

Agency Information:

UL Recognized (investigated to UL 1801) as a disconnect switch for the interruption of load current by means of withdrawing the fuse pullout.


Guide QPQY2, File E97649.

Catalog Numbers:

TP158HC: Rear Access, Panel Mounting, English

TP158HC: Rear Access, Panel Mounting, Metric

Easy Fuse Replacement

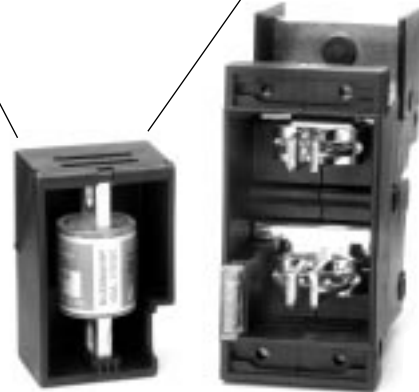

General Information:

- High amp version of Bussmann 15800 series Fused Disconnect Switch.
- Similar profile, mounting method, and backplane configuration as 15800 Series. The TP158HC can be installed into existing 15800 Series panels using the space of two 15800 disconnects.
- Innovative new fuse pullout design eliminates need for tools to replace the Telpower® type TPL-B fuse.
- For use with the following fuses only:
Main: Telpower® TPL-B 70-250A.
Alarm: Bussmann GMT-A only.
- Alarm output with wire wrap terminal or connection to .063 inch (1.6mm) thick common alarm bus.
- Hardware included:
Load: washer, split lockwasher, and 5/16 – 18 nut (metric-M8 x 1.25)

- Thermoplastic housing material UL rated 94V-0, 150°C.
- Spare fuseholders:
for TPL-B fuses (TPSFH-LB), see page 14;
for GMT fuses (TPSFH-T), see page 14.
- Application Note: The line connection uses a 1/4-20 bolt (metric – M6X1) that threads into the line terminal. The line terminal is designed with a float of ± 0.02 in. ($\pm .50$ mm) to allow for variation in the distance between the TP158HC mounting flange and the line bus bar (see dimensional data). Equipment should be designed to eliminate any relative movement between the TP158HC mounting flange and the line bus bar.
- Application Note: The alarm circuit is not intended for precharging of capacitive circuits. Alarm circuit current 1A maximum.



The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Fused Disconnect Switch

TP158HC

TP158HC - Dimensional Data

- NOTES:
1. MATERIAL: FUSED DISCONNECT HEAD AND HOUSING CONSISTS OF BLACK THERMOPLASTIC UL RATED PA660 AND 40PC CONTINUOUS USE TEMPERATURE RATING. ALL TERMINALS TIN PLATED.
 2. ELECTRICAL RATINGS: 80VDC, 250 AMP, 1000A SHORT CIRCUIT WITHSTAND.
 3. RECOGNIZED FOR USE WITH BUSSMANN TYPE TPL-B FUSES ONLY.
 4. THIS PRODUCT IS RECOGNIZED TO THE PROPOSED UL 1801 STANDARD FOR TELECOMMUNICATIONS EQUIPMENT.
 5. LOAD CONNECTION HARDWARE SUPPLIED (SHIPPED IN BAGS): ENGLISH:(1) 5/16"-18 NUT,(1) 5/16" SPLIT LOCKWASHER,(1) 5/16" FLAT WASHER METRIC:(1) M8 NUT,(1) M8 SPLIT LOCKWASHER,(1) M8 FLAT WASHER
 6. LINE CONNECTION HARDWARE IS NOT SUPPLIED.

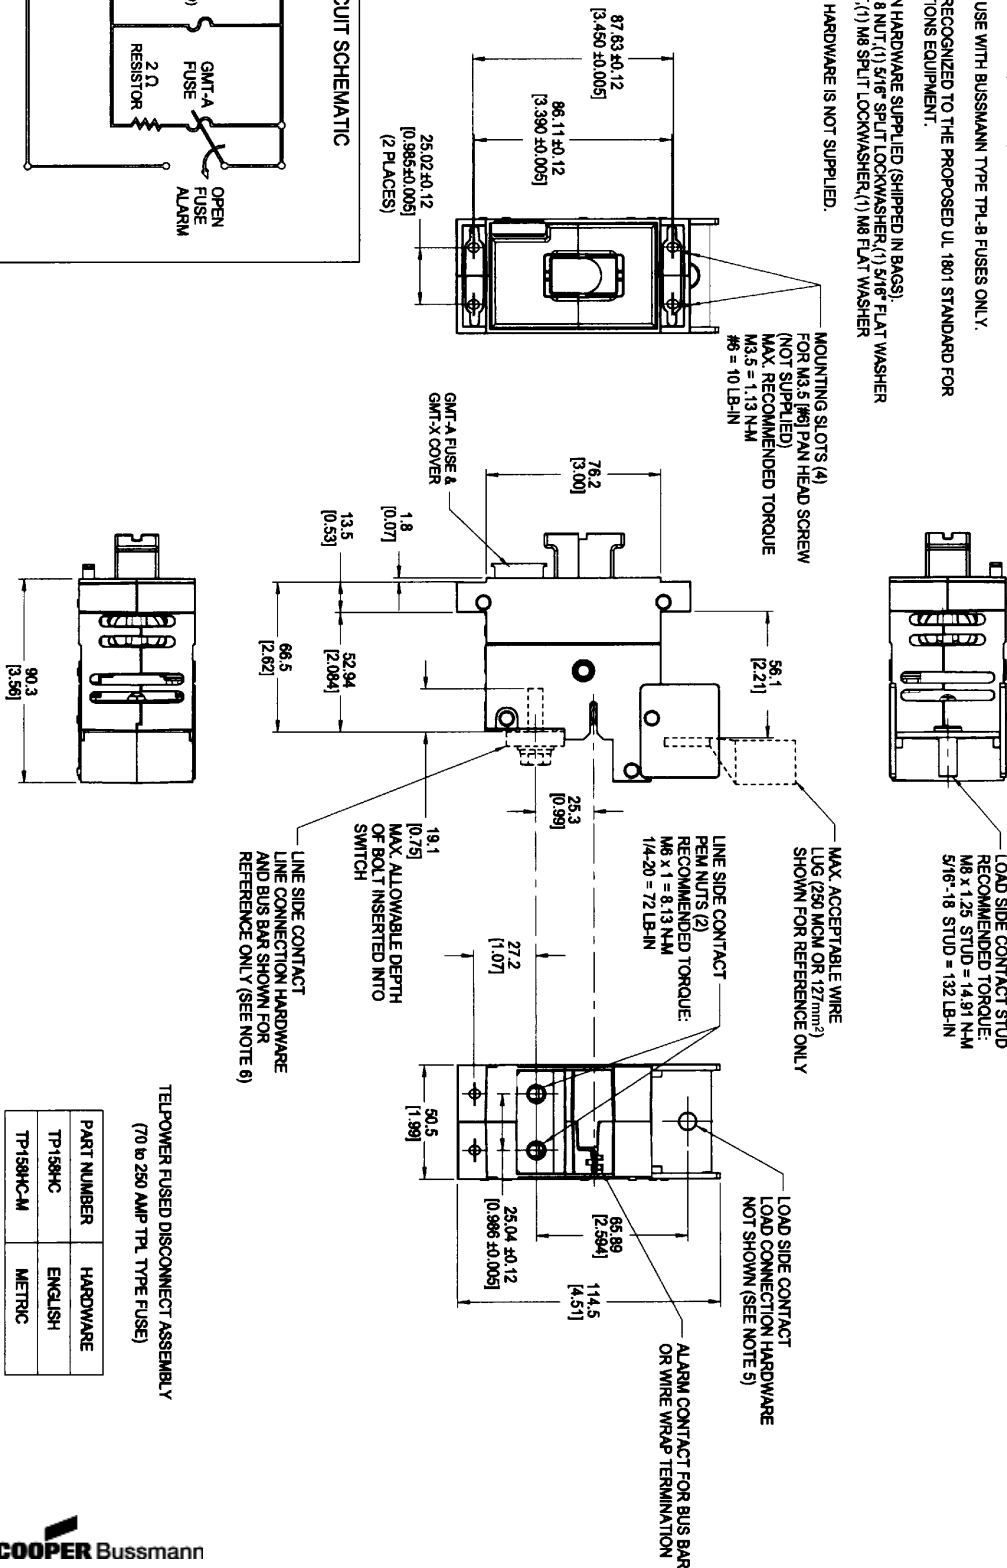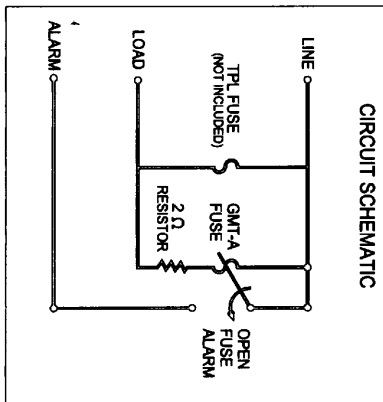

TELPOWER FUSED DISCONNECT ASSEMBLY
(70 to 250 AMP TPL TYPE FUSE)

| PART NUMBER | HARDWARE |
|-------------|----------|
| TP158HC | ENGLISH |
| TP158HC-M | METRIC |