



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





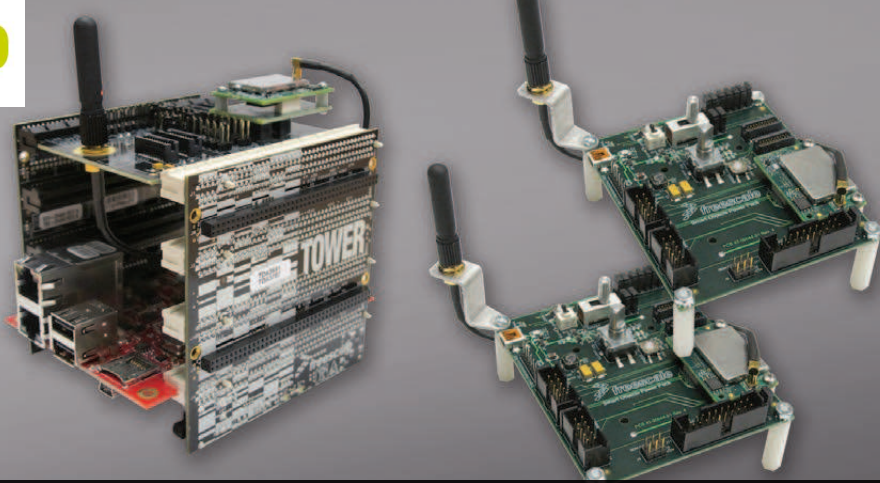

Internet of Things, MCUs, Sub-GHz RF, IPv6, 6LoWPAN, CoAP

# Tower System-Based Metropolitan Area Network Development Kit

## Overview

The TWR-METRO-KIT metropolitan area network (MAN) development kit enables you to quickly build a 6LoWPAN-compliant smart object network out of the box and integrate it with your own hardware for network performance evaluation in a real environment for Internet of Things or machine-to-machine application solutions. MANs are ideal for demanding applications such as “last mile” smart metering communication and street lighting control. A MAN is typically defined by extreme reliability over several miles while serving thousands of nodes per edge router or data concentrator with each node capable of meshing at dozens of hop levels deep.


The kit contains two wireless IP addressable end nodes that are line or battery powered, as well as a wireless edge router which connects to a PC or notebook, forming a solid basis to begin network evaluation and development. The kit can be easily expanded to support up to 10 end nodes. Each end node is built with a Nivis Smart Object radio module containing a Freescale Kinetis K series MCU based on the ARM® Cortex®-M4 core and an MC12311 sub-

GHz smart radio transceiver with up to +15 dBm of native transmit power for miles of range without the need for RF power amplification. At the core of the edge router is a QorIQ P1025 power-based MPU running Nivis edge router software.

The MAN development kit is based entirely on IEEE and open Internet communication standards. The application, transport and

networking layers of the smart object stack are based on the latest Internet Engineering Task Force (IETF) standards which include CoAP, UDP, IPv6/6LoWPAN, RPL and ICMP. The application layer payloads adhere to EXI/XML encoding. The radio uses the new IEEE® 802.15.4e time synchronized channel hopping (TSCH) MAC and IEEE 802.15.4g PHY specifications.

## Metropolitan Area Network Kit Edge Router

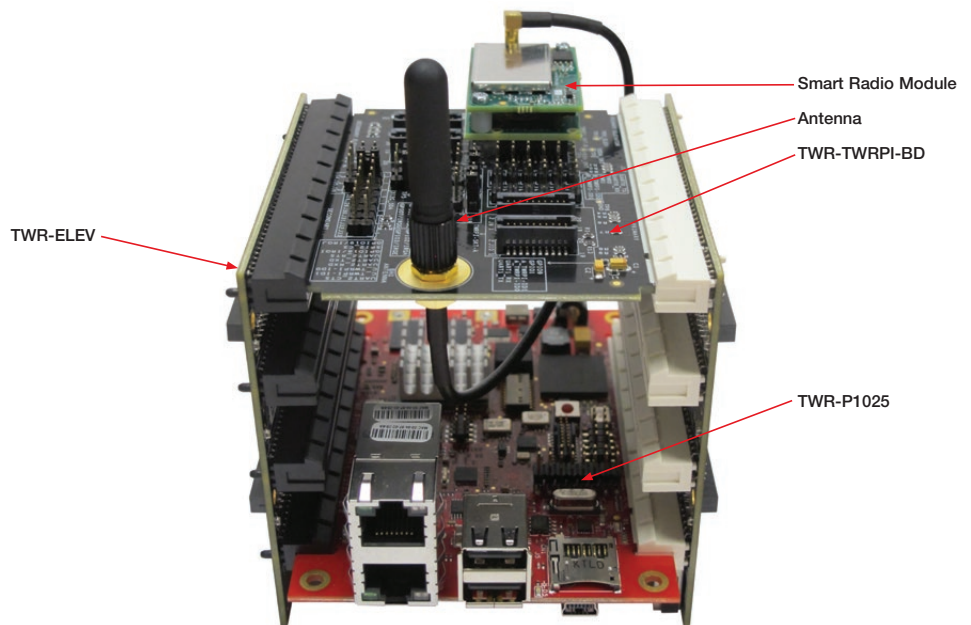

## MAN Development Kit Features

- Nivis smart object radio module
  - Certified for multiple world areas (902–928 MHz U.S./Canada, 921.4–928 MHz Japan, 863–870 MHz, Europe coming soon)
  - Communication stack from Nivis based on IEEE and open communications standards (CoAP, UDP, IPv6/6LoWPAN, RPL, ICMP, 802.15.4e TSCH MAC, and 802.15.4g PHY)
  - Kinetis K series MCU with crypto acceleration unit for AES128 link layer security
  - MC12311 sub-GHz radio, GFSK -120 dBm at 1.2 Kb/s, +15 dBm power output without amp
  - Simple API interface to external MCU-powered devices allows quick wireless enablement
  - External flash for over-the-air updates
  - Sold separately by Nivis in volume for field trials and pilots



- METRO-NODE-NA/JA
  - Nivis smart object radio module with +0 dBm quarter-wave omni-directional antenna
  - Battery or USB powered
  - Potentiometer analog value, discrete switch and battery power for easy demonstration
  - External SPI/UART header for easy integration of external PCBs to the Nivis smart object radio module
- May be purchased separately to expand the network by up to 10 nodes
- TWR-P1025
  - Dual-core QorIQ P1025 processor
  - 512 MB of DDR3 memory
  - Two RGMII Gigabit Ethernet interfaces
  - One PCI Express® (PCIe) interface x1 (mini-PCIe+USB)
  - Nivis edge router software to manage the mesh network

## Software Enablement

- Nivis edge router software
- Nivis GUI that runs on the PC


## Development Tools

Kit Number	Description
TWR-METRO-KIT-NA/JA	Development kit
Nivis smart object radio module	Sold separately by Nivis
METRO-NODE-NA/JA	Tower System node
TWR-P1025	QorIQ P1025 processor kit

## Documentation

Freescall Document Title	Description
User guide	User guide for the development kit
API documentation	Specification for the module API
Radio module data sheet	Data sheet for the radio module
Metropolitan area network development kit quick start guide	Helps users with kit setup

## Metropolitan Area Network Kit End Node

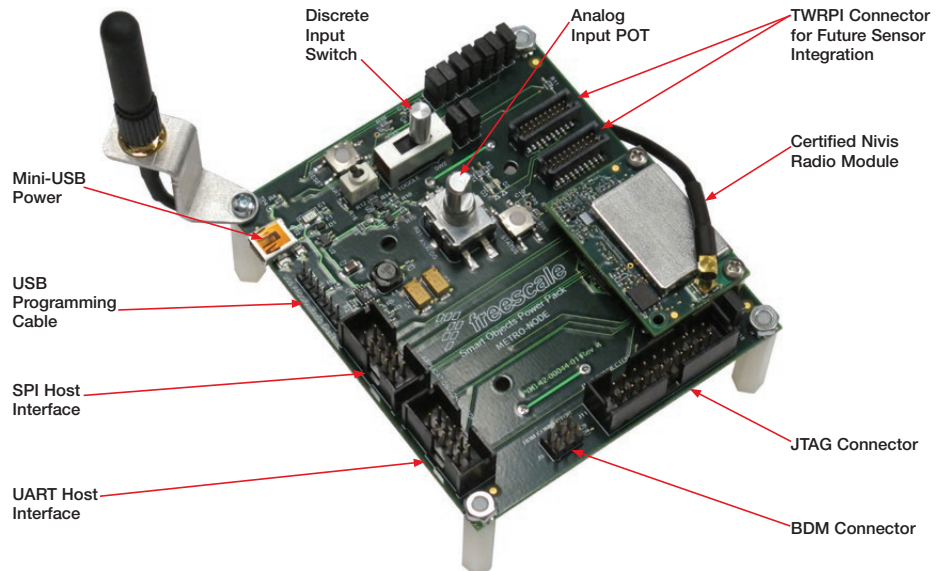

For more information, visit [freescale.com/TWR-METRO-KIT](http://freescale.com/TWR-METRO-KIT)

Freescall, the Freescall logo, Kinetis and QorIQ are trademarks of Freescall Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. ARM is the registered trademark of ARM Limited. Cortex-M4 is a trademark of ARM Limited. All other product or service names are the property of their respective owners. © 2012–2013 Freescall Semiconductor, Inc.

Document Number: TWRMETROFS REV 1