



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




## Product Specification

### Fiber Optics Cage for Small Form Factor Pluggable (SFP) Transceiver

V23818-S5-N1  
V23818-S5-N1-BB

#### PRODUCT FEATURES

- Supports MSA compliant host board layouts and transceiver designs
- One-piece, rigid stainless steel construction with tin-lead plating
- Simple and fast installation/removal
- Solid retention strength
- Easily press fit onto host board via tear-drop foot design
- Testing of rear connector may take place before SFP Cage is installed onto host board
- Low emission design via fold-back spring fingers – no openings for radiation to pass through
- Enhanced transceiver kick-out and retention springs
- Heat transfer windows on all SFP Cage surfaces
- Cage can be press fit and/or soldered

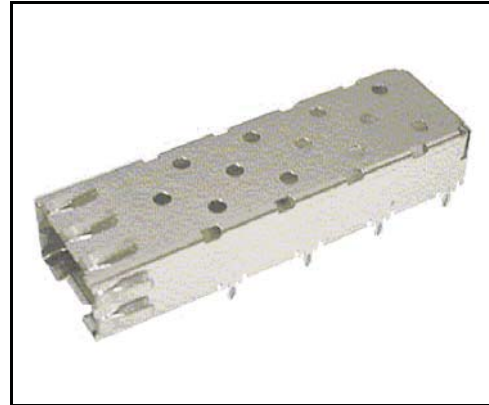

#### DESCRIPTION

Finisar is offering its Cage for Small Form Factor Pluggable (SFP) transceivers with the most rigid mechanical design available on the market. The Cage is designed for press fit applications in order to reduce high volume manufacturing effort. Press fit pins can be also soldered if required. Externally bent bezel contact springs and one-piece construction enhance EMI performance. As part of Finisar's Total Transceiver Solution, the SFP Cage is your logical choice for next generation pluggable transceivers.


Part Number	Description
V23818-S5-N1	For single-sided mounting
V23818-S5-N1-BB	For double-sided "belly to belly" mounting (see Figure3)

**APPLICATION NOTES**


- For single-sided mounting, optimum host board thickness is .059to.062in [1.5to1.57mm]. SFP Cage mounting holes should be plated with HASL, gold, or immersion silver finish per MSA dimensional recommendations
- For double-sided mounting, host board thickness is .118in [3.0mm] minimum per the MSA. For belly-to-belly applications, one of the rear mounting feet is removed to avoid interference (V23818-S5-N1-BB)
- Installation of the SFP Cage may be done by hand or with a solid metal block across the top surface of the Cage. Block dimensions to be controlled by customer
- Removal of the Cage should be done with an internal solid metal block. Due to the collapsing nature of the teardrop foot design, the Finisar SFP Cage is intended for one-time installation
- The Finisar SFP Cage does not cause any damage when carefully removed; the outside profile of the teardrop feet is smooth and will not destroy pre-plated host board mounting holes
- Trapped fluids from washing process must be dried to prevent corrosion beneath SFP Cage
- Cage retention depends on finished hole size and plating thickness

**SYSTEM CONFIGURATIONS**


- Single-sided mounting with .640in [16.25mm] pitch
- Double-sided "belly to belly" mounting with .640in [16.25mm] pitch
- Double-sided "offset belly to belly" mounting with .975in [24.77mm] pitch

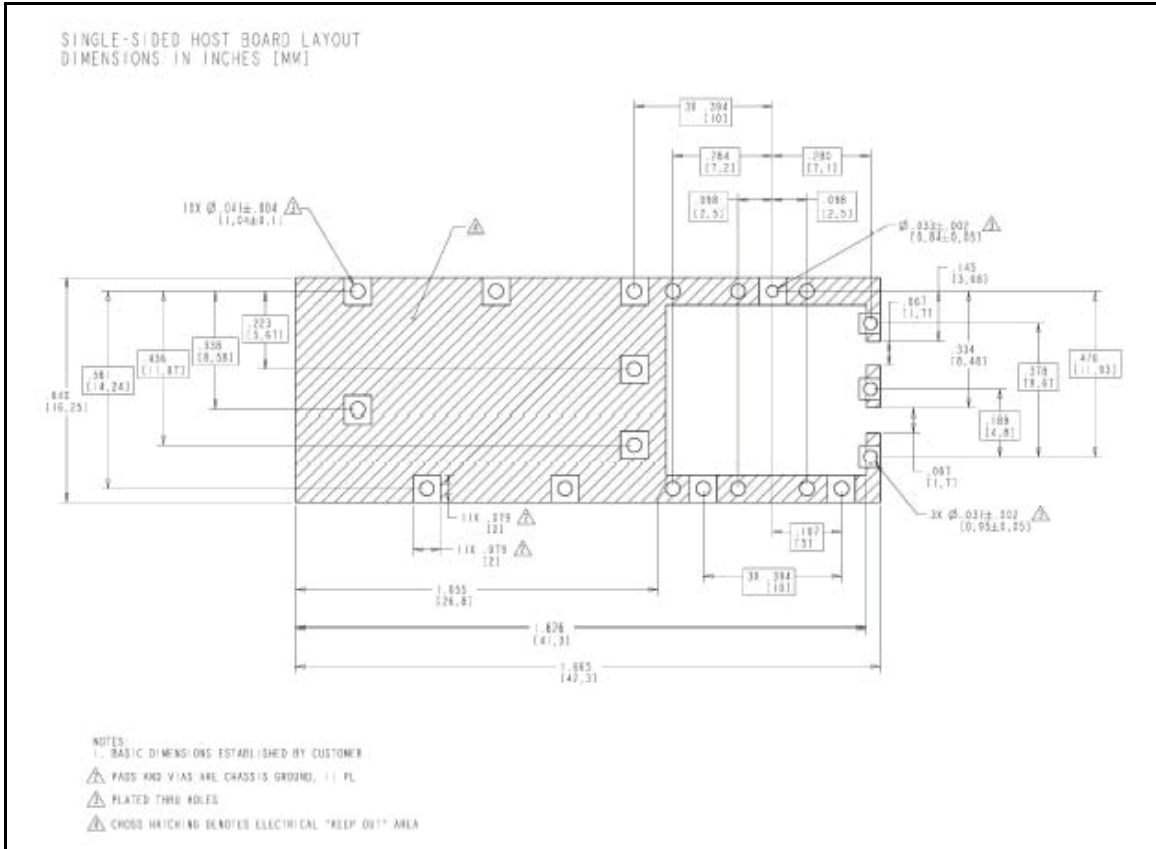

**Figure 1 Single-sided Host Board Layout**

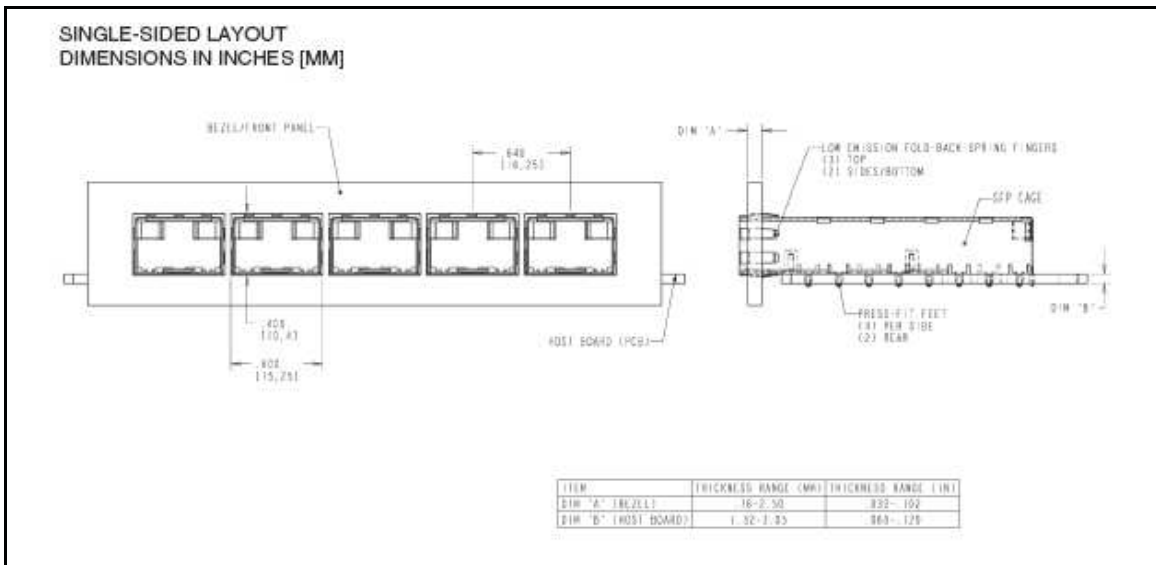


**Figure 2 Single-sided Layout**

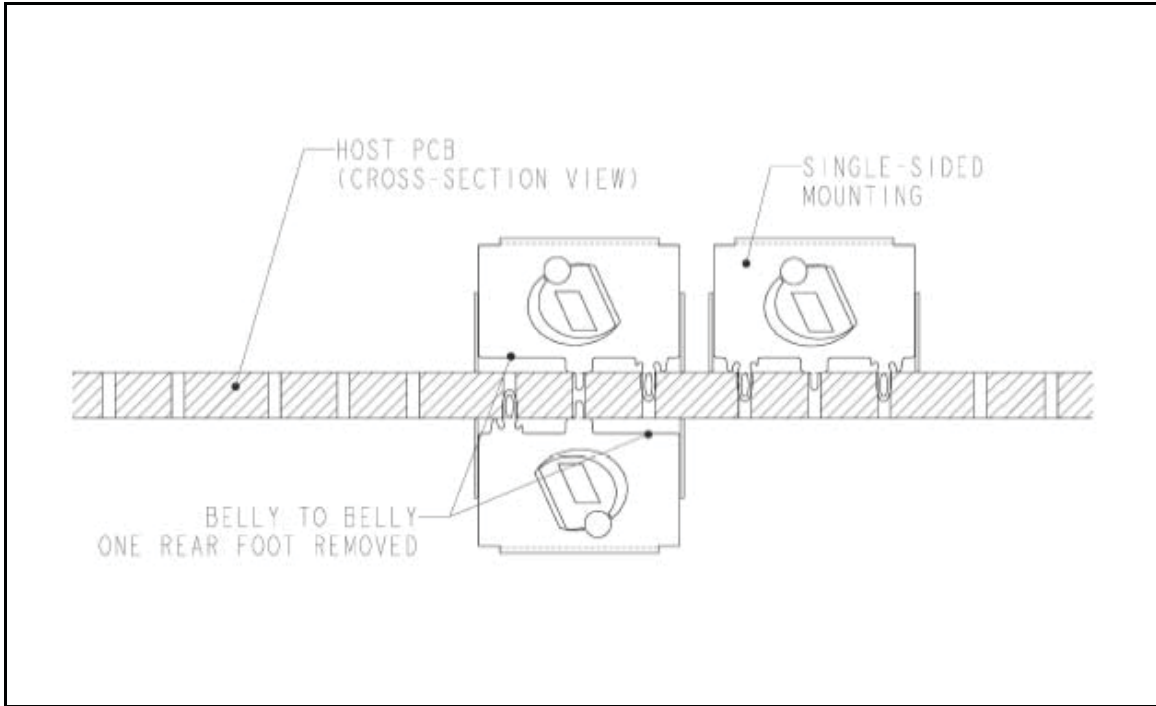


**Figure 3**

### Single-sided Application

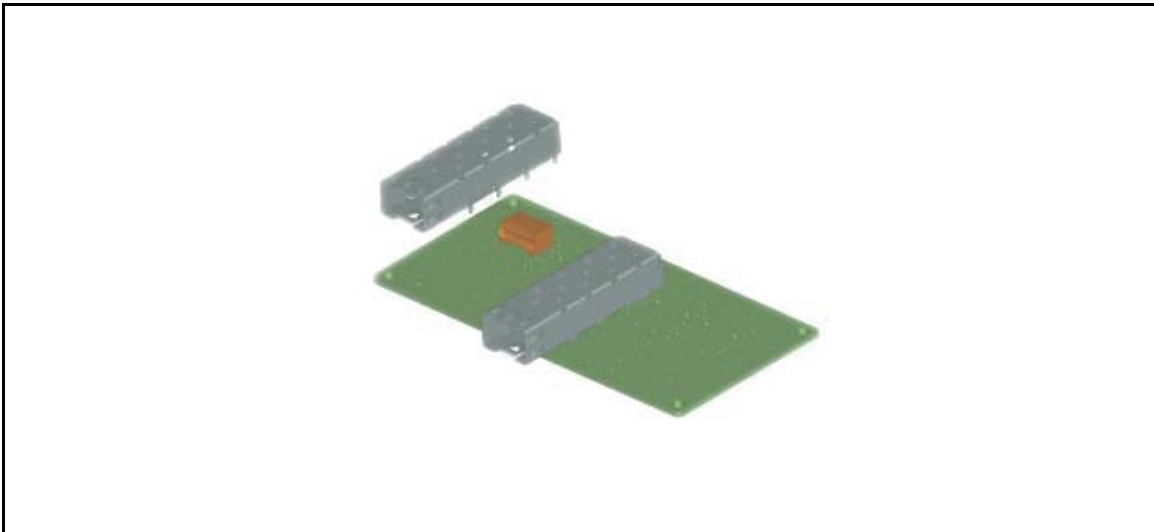


**Figure 4**

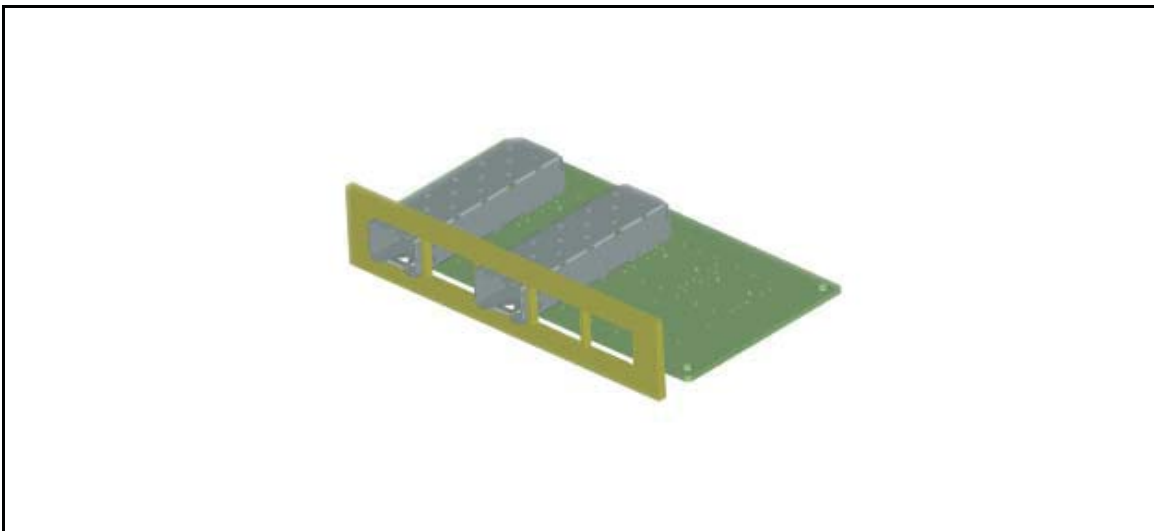


**Figure 5**

### Belly to Belly Application

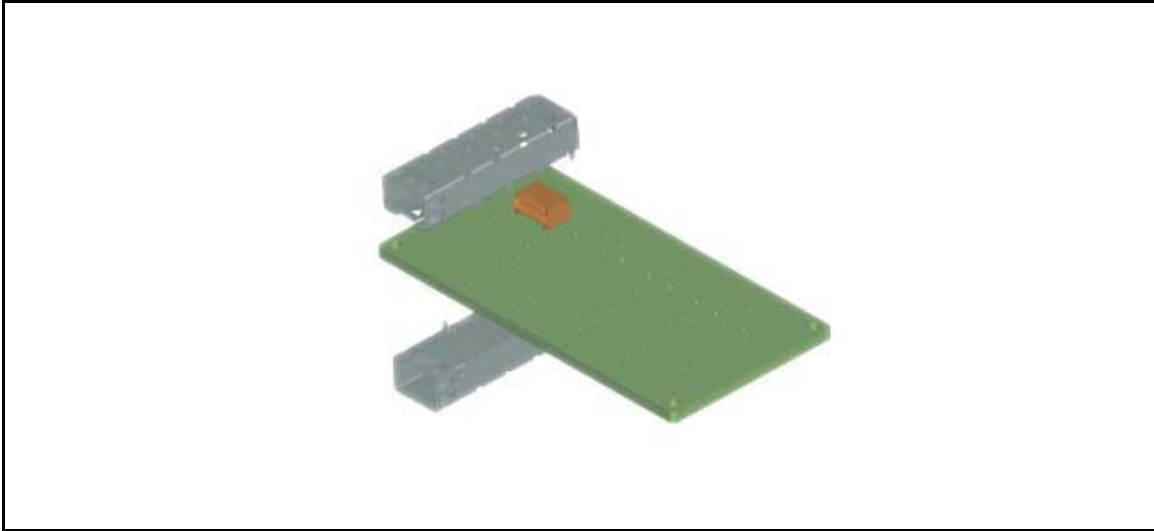

**Figure 6**

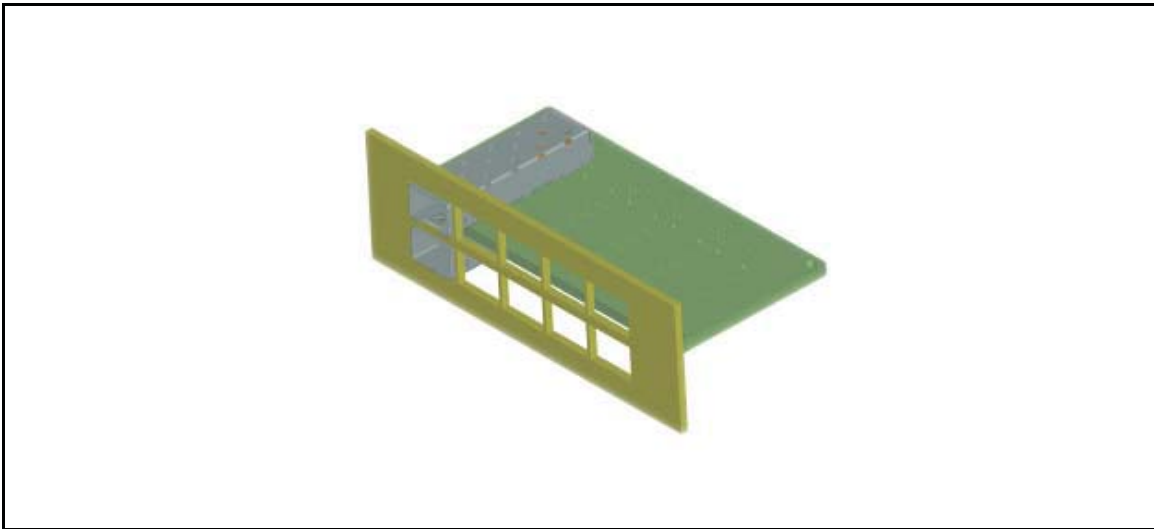

**Figure 7**

### Package Outlines

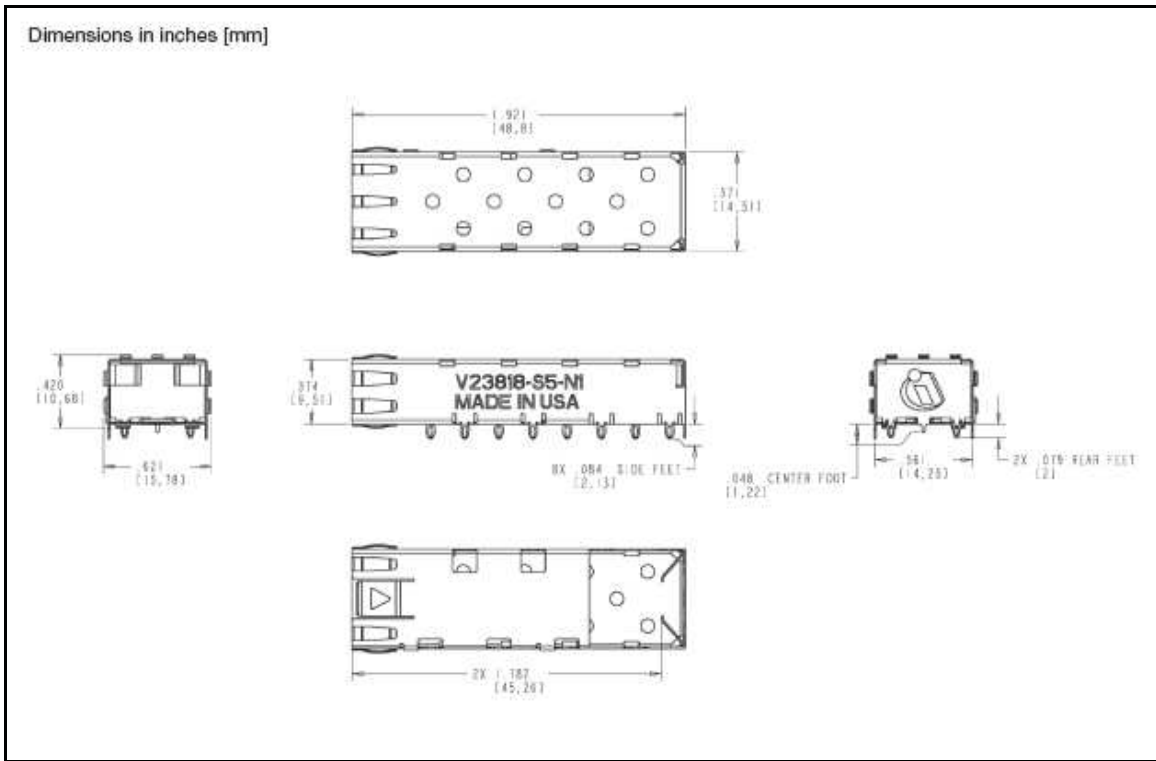


Figure 8



<b>Revision History:     2002-10-07</b>		<b>DSO</b>
Previous Version:		
<b>Page</b>	<b>Subjects</b> (major changes since last revision)	
	Company's name has been changed Document's layout has been changed <b>2002-10-07</b>	

**For More Information**

Finisar Corporation  
 1389 Moffett Park Drive  
 Sunnyvale, CA 94089-1133  
 Tel. 1-408-548-1000  
 Fax 1-408-541-6138  
**sales@finisar.com**  
**www.finisar.com**