# imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Type Selection** Ordering no. Ordering no. With ON delay With OFF delay VC11RTM2410M VC12RTM2410M

# **Specifications**

Supply voltage

24-230 V AC/DC

Rated operating distance (S <sub>n</sub> )		<b>Operating frequency</b> (f)	≤ 1 Hz
	reference target 30 x 30 mm	Response time	
	ST37.1 mm thick, grounded	OFF-ON (t <sub>on</sub> )	≤ 500 ms
Sensing distance	4-12 mm, adjustable	ON-OFF (t <sub>OFF</sub> )	≤ 500 ms
	Factory set at 7 mm	Power ON delay (t <sub>v</sub> )	≤ 200 ms
Sensing distance adjustment	adjustment steps	Output function	SPDT relay
		Output switching function	N.O. and N.C.
Temperature drift	$0.8 \ x \ S_r \leq S_u \leq 1.2 \ x \ S_r$	Indication	
Hysteresis (H)	3 to 20%	Output ON	Red LED
Rated operational volt. (U <sub>B</sub> )	20.4 to 255 VAC/DC	Time Delay	LED flashing depends on
(ripple included)			time delay
Rated supply frequency	47 to 63 Hz	Output Time delay	Factory settings 0 sec.
Rated operational power	0.5 to 2.5 VA	Delay on operate, adjustment VC11TRM2410M	1 sec 10 min.
Output	2 A Relay SPDT@240 VAC	Delay on release, adjustment	
AC12 2 A		VC12RTM2410M	1 sec 10 min.
AC140 2 A		No time delay VC12RNM24	no delay
DC12 2 A		Time delay adjustment	Multiturn, 15 turns
DC13 2 A		Environment	
Mechanical life typically	15x10 <sup>6</sup> operations	Installation category	III (IEC 60664/60664A;
Electrical lifetime	1x10 <sup>5</sup> operations @ 2A/240VAC	installation category	60947-1)
	2A/240VAC	Pollution degree	3 (IEC 60664/60664A;
Minimum operational			60947-1)
current (I <sub>m</sub> )	10 mA@12 VDC (i.e.	Degree of protection	IP 67
	Minimum relay current)		(IEC 60529; 60947-1)
Protection	Reverse polarity and transients		NEMA (1, 2, 5)

## **Product Description**

Capacitive sensor in thermoplastic polyester for mounting in a PG 36 screw gland. Available with adjustable sensing distance and with/ without built-in time delay (ON or OFF delay). The relay output ensures that the load can be driven directly. Excellent for use in the agricultural area (detection of grains, fluids etc.).

Ordering Key	VC11RTM2410M
Type Time delay options	
Voltage Time delay	

Ordering no.

**VC12RNM24** 

Without time delay

## **Thermoplastic Polyester** Types VC11RTM24, VC12RTM24, VC12RNM24

**Proximity Sensors Capacitive** 

#### **CARLO GAVAZZI**


- · Level sensor for solid, fluid or granulated substances
- Adjustable sensing distance: 4-12 mm
- Multi voltage supply: 20.4 to 255 VAC/DC
- SPDT relay output
- Time delay on operate or release
- Time delay options up to 10 minutes
- VC11/12RTM24: With adjustable time delay
- VC12RNM24: Without time delay
- Cable versions

# CARLO GAVAZZI


## Specifications (cont.)

Ambient temperature		Housing material	
Operating temperature	-20° to +70°C	Body	PBT, Polyester
	(-4° to +158°F)	Backpart	Arnitel
Storage temperature	-40° to +85°Ć	Trimmer	LCP Vectra
	(-40° to +185°F)	Connection	
Vibration	10 to 150 Hz, 1.0 mm/15 G (IEC 60068-2-6)	Cable	PVC, gray, 2 m
			$5 \times 0.75 \text{ mm}^2$ , $\emptyset = 7.6 \text{ mm}^2$
Shock	30 g / 11ms, 3 pos, 3 neg per axis (IEC 60068-2-6, 60068-2-32)	Weight	≤ 320 g
		Approvals	cULus (UL508+CSA)
tated insulation voltage $\geq 250$ VAC (rms)		CE-marking	Yes

#### Dimensions

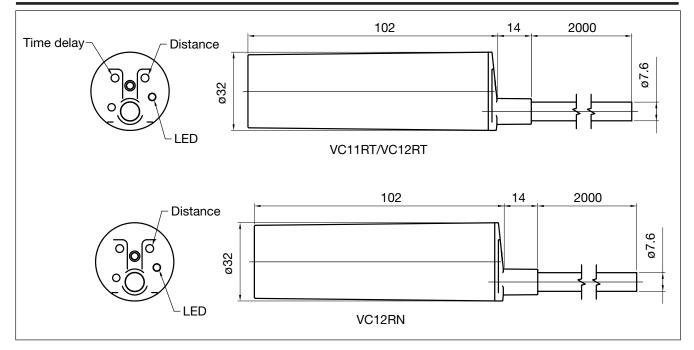

#### **Trimmer VS Delaytime**

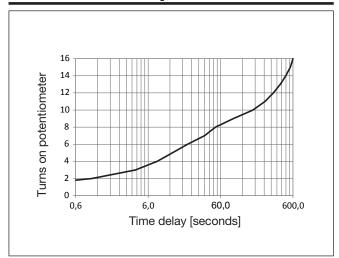

#### **Trimmer VS Distance**



CARLO GAVAZZI

#### Distance [Inches] 0.00 0.08 0.16 0.24 0.31 0.39 0.47 0.55 20,0 0,8 0,6 15,0 10.0 0.4 0,2 0,0 -0,2 5,0 0,2 [mm] 0,0 -5,0 -10,0 -0,4 -15,0 -0,6 -20,0 -0,8 0 2 4 6 8 10 12 14 Distance [mm]

#### **Detection Diagram**

#### **Mode of Operation**

**VC11RTM24** (See operation diagram). Power supply is applied to the sensor (BN and BU wires). When the target is not present, the relay operates (connection between BK and YE wires) and LED lights. When the target is detected the time


**VC12RTM24** (See operation diagram). Power supply is applied to the sensor BN and BU wires) and time measurement starts. When the set time has expired (0-10 min.) the relay operates (connection between BK and YE wires) and remains

**VC12RNM24** (See operation diagram). Power supply is applied to the sensor (BN and BU wires). The relay operates (connection between BK and YE wires) and remains ON until the measurement starts and LED flashes. After expiration of the set time (0-10 min.), the relay releases (connection between BK and GY wires) and LED turns off. The relay remains released as long as the target is detected.


connected until the target is detected. After activation of the sensor the relay releases (connection between BK and GY wires). As soon as the target is not present again the time measurements of the set time starts.

target is detected. After activation of the sensor the relay releases (connection between BK and GY wires.)

### Wiring Diagram

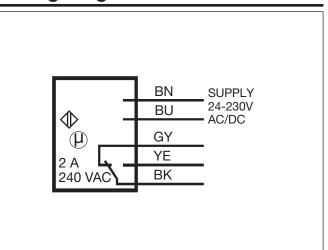

#### Adjustment

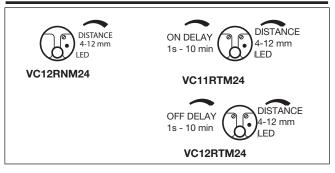




## **Operation Diagrams**

Power supply (BN - BU wires)			
Target detected			
Relay ON (BK - YE wires)			
LED indication			
VC12RNM24			
Power supply (BN - BU wires)			
Target detected			
Relay ON (BK - YE wires)			
LED indication			
VC11RTM24			
Power supply (BN - BU wires)			
Target detected			
Relay ON (BK - YE wires)			
LED indication		 	
VC12RTM24			

#### **Installation Hint**

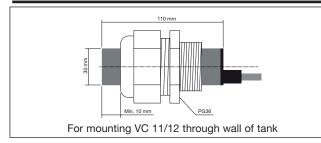

#### **Delivery Contents**

- Capacitive switch: VC11/12
- Installation instruction
- Screwdriver
- Packaging: Plastic bag