



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



NON-ISOLATED DC/DC CONVERTERS

3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output

bel
POWER PRODUCTS

xRAH-01CXx0 Series RoHS Compliant Rev.A

- Non-Isolated
- High Efficiency
- Fixed Frequency (550 kHz)
- Low Profile Package
- Trim Function (option)
- Allows Burst Mode Operation at Low Load Currents
- UL60950-1 Recognized (UL/cUL)



Description

The Bel xRAH-01CXx0 is part of the low cost non-isolated dc/dc converter series. The modules use a SMD or SIP package or vertical package for ease of layout and space savings. The output is closely regulated and the efficiency of 12 Vdc output module is typically 86% at full load. Typical features include allows burst mode operation at low load currents and trim function (option).

Part Selection

Output Voltage	Input Voltage	Max. Output Current	Max. Output Power	Typical Efficiency	Part Number Surface Mount	Part Number Vertical Mount
12 V	3 V - 3.6 V	0.8 A	9.6 W	86%	SRAH-01CX20	VRAH-01CX20
15 V	3 V - 3.6 V	0.6 A	9.0 W	85%	SRAH-01CX50	VRAH-01CX50

- Notes:** 1. Add "0" suffix at the end of the model number to indicate "Tube Packaging", and "R" for "Reel Packaging", and "G" for "Tray Packaging".
2. All part numbers above indicate RoHS 6. Change the second letter "R" to "7" for RoHS 5 part numbers.

Absolute Maximum Ratings

Parameter	Min	Typ	Max	Notes
Input Voltage (continuous)	2.8 V	-	4 V	
Ambient Temperature	-40 °C	-	85 °C	
Storage Temperature	-40 °C	-	125 °C	

Input Specifications

Parameter	Min	Typ	Max	Notes
Input Voltage	3 V	-	3.6 V	
Input Current (no load)	-	15 mA	-	
Input Current (full load)				
	Vo=12V	-	4.3 A	
	Vo=15V	-	4 A	
Input Reflected Ripple Current (pk-pk)	-	100 mA	150 mA	With simulated source impedance of 500 nH, 5 Hz to 20 MHz; Use 270 uF/16 V capacitor with ESR = 0.018 ohm max. at 100KHz at 25 °C
Input Reflected Ripple Current (rms)	-	30 mA	60 mA	
I ² t Inrush Current Transient	-	0.02 A ² s	0.05 A ² s	
Turn-on Voltage Threshold	-	2.8 V	2.9 V	

NON-ISOLATED DC/DC CONVERTERS

3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Output Specifications

Parameter		Min	Typ	Max	Notes	
Output Voltage Set Point	Vo=12 V	11.58 V	12 V	12.42 V	Test condition: Vin=3.3V, Iout=full load	
	Vo=15 V	14.475 V	15 V	15.525 V		
Line Regulation	Vo=12 V	-	20 mV	40 mV		
	Vo=15 V	-	20 mV	40 mV		
Load Regulation	Vo=12 V	-	60 mV	120 mV		
	Vo=15 V	-	75 mV	150 mV		
Regulation Over Temperature (-40 °C to +85 °C)	Vo=12 V	-	45 mV	80 mV		
	Vo=15 V	-	60 mV	100 mV		
Output Current	Vo=12 V	0 A	-	0.8 A		
	Vo=15 V	0 A	-	0.6 A		
Ripple and Noise (rms)	Vo=12 V; Io=0 A	-	25 mV	50 mV	Test conditions: BW = 0-20 MHz; 1 uF Ceramic capacitor and 33 uF Tantalum capacitor at the output	
	Vo=15 V; Io=0 A	-	25 mV	50 mV		
	Vo=12 V; Io=0.8 A	-	25 mV	50 mV		
	Vo=15 V; Io=0.6 A	-	35 mV	60 mV		
Ripple and Noise (pk-pk)	Vo=12V; Io=0A	-	85 mV	120 mV		
	Vo=15V; Io=0A	-	100 mV	150 mV		
	Vo=12V; Io=0.8A	-	60 mV	100 mV		
	Vo=15V; Io=0.6A	-	100 mV	150 mV		
Rise Time		-	5 mS	-		
Overshoot at Turn on		-	0%	5%		
Output Capacitance		33 uF	-	330 uF	The min output capacitance is 33 uF Tantalum capacitor at the output	
Transient Response						
50% ~ 100% Max Load	Overshoot	All Outputs	-	130 mV	200 mV	di/dt = 0.1 A/uS; Vin = 3.3 V; and with 33 uF Tantalum capacitor at the output
	Settling Time		-	100 uS	200 uS	
100% ~ 50% Max Load	Overshoot		-	130 mV	200 mV	
	Settling Time		-	100 uS	200 uS	

Note: All specifications are typical at nominal input, full load at 25 °C unless otherwise stated.

NON-ISOLATED DC/DC CONVERTERS

3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output



General Specifications


Parameter	Min	Typ	Max	Notes
Efficiency Vo=12 V Vo=15 V	82% 81%	86% 85%	- -	Measured at Vin=3.3 V, full load
Switching Frequency	500 kHz	550 kHz	650 kHz	
Output Trim Range	90% Vo	-	110% Vo	
MTBF	13,296,605 hours			Calculated Per Bell Core SR-332 (Vin=3.3 V; Vo=12 V; Io = 0.64 A; Ta = 25 °C)
Dimensions (surface mount) Inches (L x W x H) Millimeters (L x W x H)	0.78 x 0.7 x 0.32 19.81 x 17.78 x 8.13			
Dimensions (vertical) Inches (L x W x H) Millimeters (L x W x H)	0.7 x 0.308 x 0.65 17.78 x 7.82 x 16.51			
Weight	-	5.2 g	-	

Note: All specifications are typical at 25 °C unless otherwise stated.


Output Trim Equations

Equations for calculating the trim resistor (in kΩ) given the desired adjusted voltage (Vadj) and the nominal output voltage of the converter (Vnom) are shown below. The Trim Down resistor should be connected between the Trim pin and Vout. The Trim Up resistor should be connected between the Trim pin and Ground. Only one of the resistors should be used for any given application.

$$R_{trim-down} = \frac{A}{V_{nom} - V_{adj}} - B$$

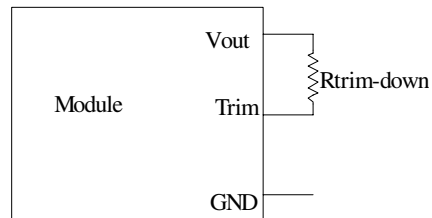

$$R_{trim-up} = \frac{C}{V_{adj} - V_{nom}} - D$$

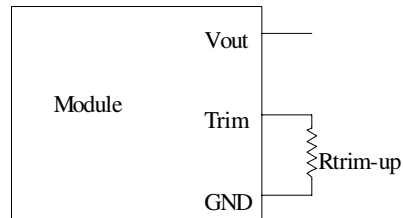


Vnom	A	B	C	D
12	164.640	21.850	11.760	7.150
15.055	209.542	20.600	11.760	5.900

NON-ISOLATED DC/DC CONVERTERS


3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Efficiency Data

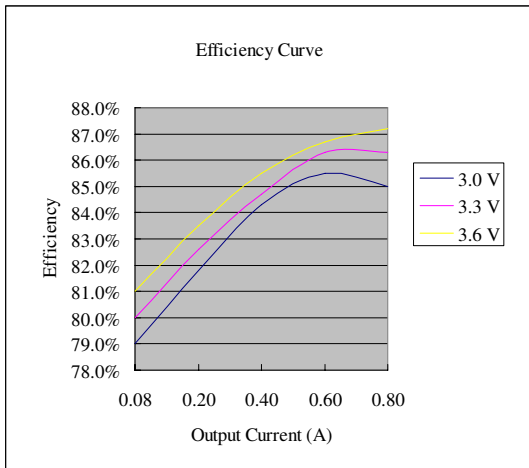


xRAH-01CX20

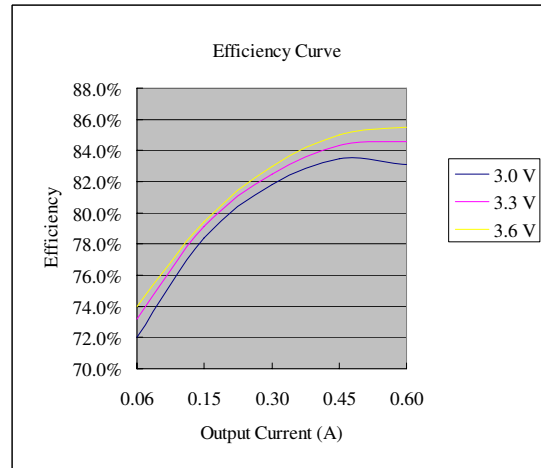


xRAH-01CX50

Thermal Derating Curves

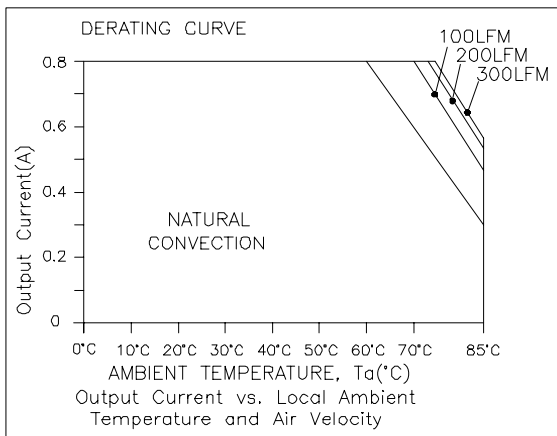

xRAH-01CX20

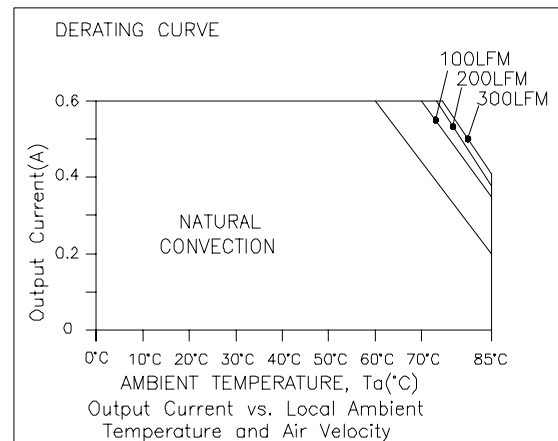


xRAH-01CX50

NON-ISOLATED DC/DC CONVERTERS


3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Ripple and Noise Waveforms

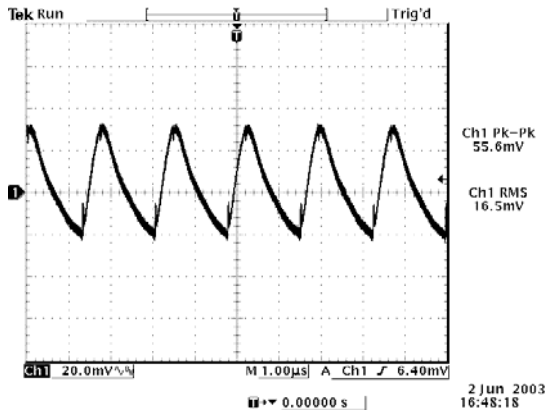


3.3 Vdc input, 12 Vdc output

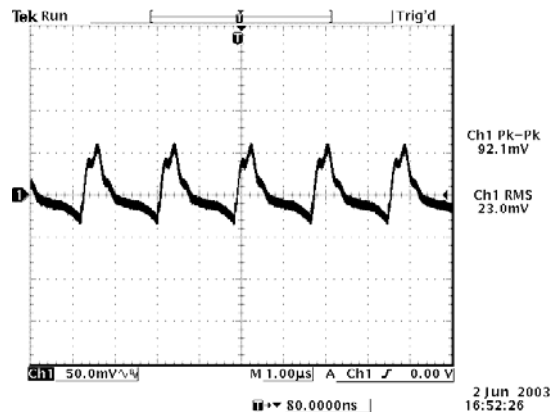


3.3 Vdc input, 15 Vdc output

Note: Ripple and noise at full load, 1 μ F ceramic cap and 33 μ F tantalum cap at the output, and $T_a=25$ deg C.


Transient Response Waveforms

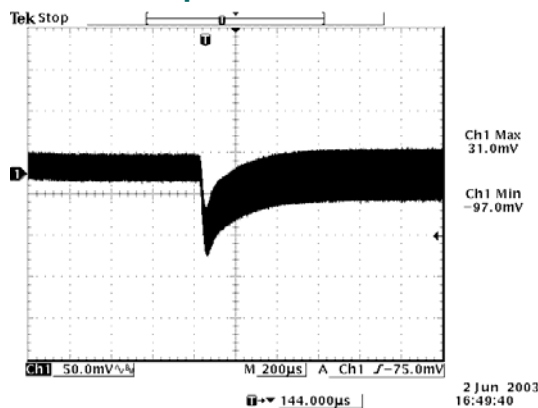


50% to 100% load transient at $V_{in}=3.3$ V, $V_o=12$ V

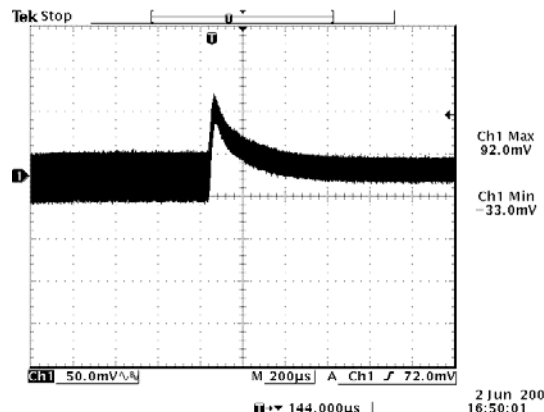

100% to 50% load transient at $V_{in}=3.3$ V, $V_o=12$ V

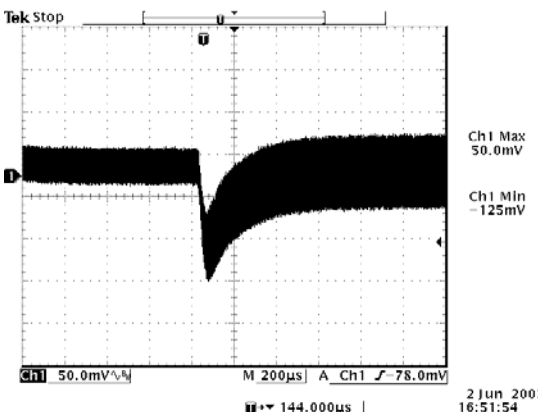

50% to 100% load transient at $V_{in}=3.3$ V, $V_o=15$ V

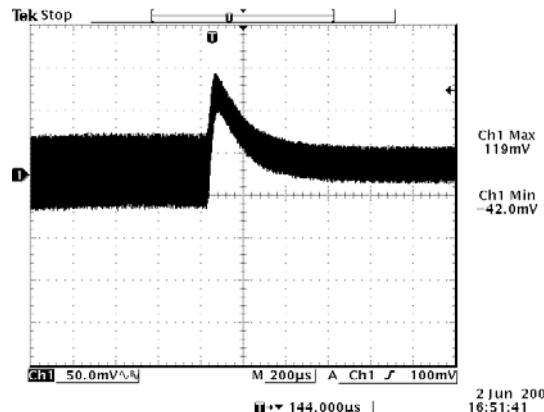

100% to 50% load transient at $V_{in}=3.3$ V, $V_o=15$ V

Note: Transient response at $di/dt=0.1$ A/ μ S, with an external 33 μ F tantalum load cap at the output, and $T_a=25$ deg C.


NON-ISOLATED DC/DC CONVERTERS

3 Vdc - 3.6 Vdc Input 12 Vdc/0.8 A & 15 Vdc/0.6 A Output



Mechanical Outline


SRAH-01CXx0

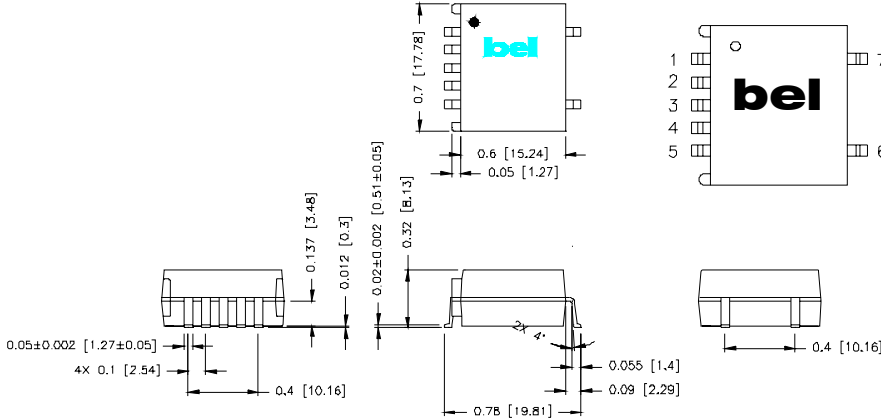

Pin Connections

Pin	Function
1	N/A
2	Vin
3	Ground
4	Vout
5	Trim (option)
6	N/A
7	N/A


VRAH-01CXx0

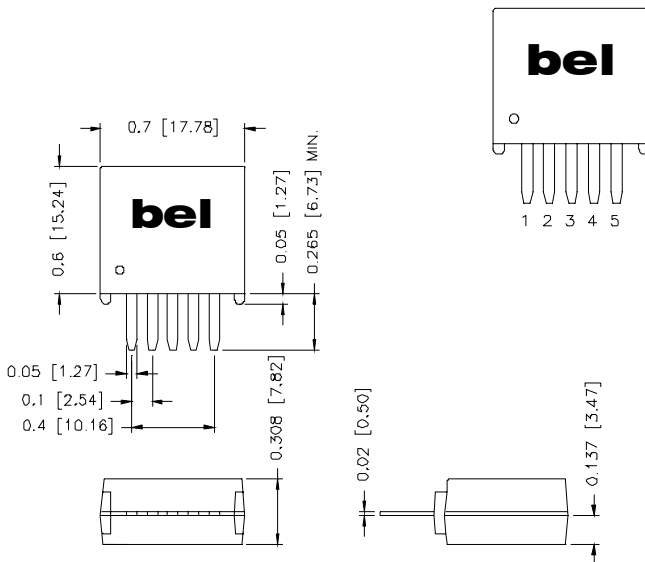

Pin Connections

Pin	Function
1	N/A
2	Vin
3	Ground
4	Vout
5	Trim (option)

RECOMMENDED PCB PAD LAYOUT

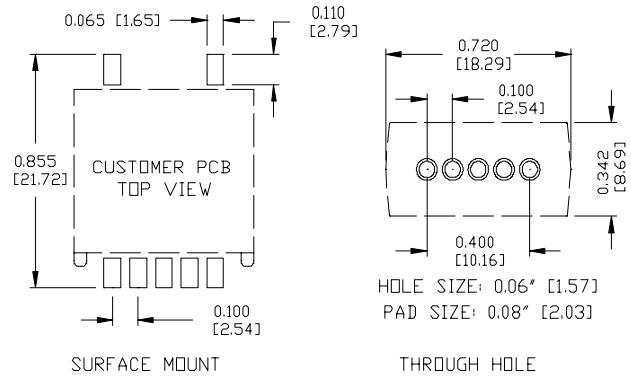

RoHS Compliance

Complies with the European Directive 2002/95/EC, calling for the elimination of lead and other hazardous substances from electronic products. These parts are not however compatible with the higher temperatures associated with lead free solder processes and must be soldered using a reflow profile with a peak temperature of no more than 240 °C.



©2007 Bel Fuse Inc. Specifications subject to change without notice. 011007

CORPORATE

Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
www.belfuse.com

FAR EAST

Bel Fuse Ltd.
8F/ 8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706
www.belfuse.com

EUROPE

Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite G7, Preston
Lancashire, PR1 8UD, U.K.
Tel 44-1772-556601
Fax 44-1772-888366
www.belfuse.com