

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









## T-1 (3mm) BI-COLOR INDICATOR LAMP

Part Number: WP115WEYW

High Efficiency Red

### **Features**


- Uniform light output.
- Low power consumption.
- 3 leads with one common lead.
- Long life solid state reliability.
- RoHS compliant.

### Description

The High Efficiency Red source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

## **Package Dimensions**

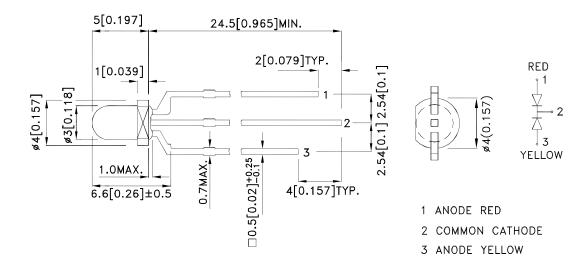

- 1. All dimensions are in millimeters (inches).
- 2. Tolerance is ±0.25(0.01") unless otherwise noted.
- Lead spacing is measured where the leads emerge from the package.
   The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.

SPEC NO: DSAF2638 **REV NO: V.4A DATE: JAN/26/2013** PAGE: 1 OF 7 APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101030818

### **Selection Guide**

Part No.	Dice	Lens Type	lv (mcd) [2] @ 20mA		Viewing Angle [1]
		2.	Min.	Тур.	201/2
WP115WEYW	High Efficiency Red (GaAsP/GaP)	White Diffused	20	40	- 60°
			*12	*20	
	Yellow (GaAsP/GaP)		10	20	
			*10	*20	

- 1. 01/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
  2. Luminous intensity/ luminous Flux: +/-15%.

  \* Luminous intensity value is traceable to the CIE127-2007 compliant national standards.

## Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Тур.	Max.	Units	Test Conditions	
λpeak	Peak Wavelength	High Efficiency Red Yellow	627 590		nm	IF=20mA	
λD [1]	Dominant Wavelength	High Efficiency Red Yellow	617 588		nm	I=20mA	
Δλ1/2	Spectral Line Half-width	High Efficiency Red Yellow	45 35		nm	IF=20mA	
С	Capacitance	High Efficiency Red Yellow	15 20		pF	VF=0V;f=1MHz	
VF [2]	Forward Voltage	High Efficiency Red Yellow	2 2.1	2.5 2.5	V	IF=20mA	
lR	Reverse Current	High Efficiency Red Yellow		10 10	uA	V <sub>R</sub> = 5V	


- 1. Wavelength: +/-1nm.
  2. Forward Voltage: +/-0.1V.
  3. Wavelength value is traceable to the CIE127-2007 compliant national standards.

## Absolute Maximum Ratings at TA=25°C


Parameter	High Efficiency Red	Yellow	Units		
Power dissipation	75	75	mW		
DC Forward Current	30	30	mA		
Peak Forward Current [1]	160	140	mA		
Reverse Voltage	5 V				
Operating / Storage Temperature	-40°C To +85°C				
Lead Solder Temperature [2]	260°C For 3 Seconds				
Lead Solder Temperature [3]	260°C For 5 Seconds				


- 1. 1/10 Duty Cycle, 0.1ms Pulse Width.
- 2. 2mm below package base.
   3. 5mm below package base.


SPEC NO: DSAF2638 **REV NO: V.4A** DATE: JAN/26/2013 PAGE: 2 OF 7 APPROVED: WYNEC **CHECKED: Allen Liu** DRAWN: Y.Liu ERP: 1101030818

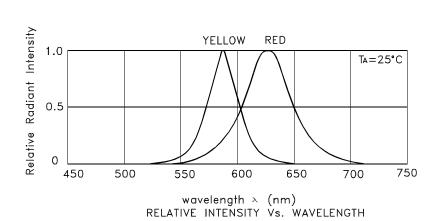



## WP115WEYW High Efficiency Red














SPEC NO: DSAF2638 REV NO: V.4A DATE: JAN/26/2013 PAGE: 3 OF 7


APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101030818

## Yellow











PAGE: 4 OF 7

ERP: 1101030818



SPATIAL DISTRIBUTION


SPEC NO: DSAF2638 REV NO: V.4A DATE: JAN/26/2013
APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu

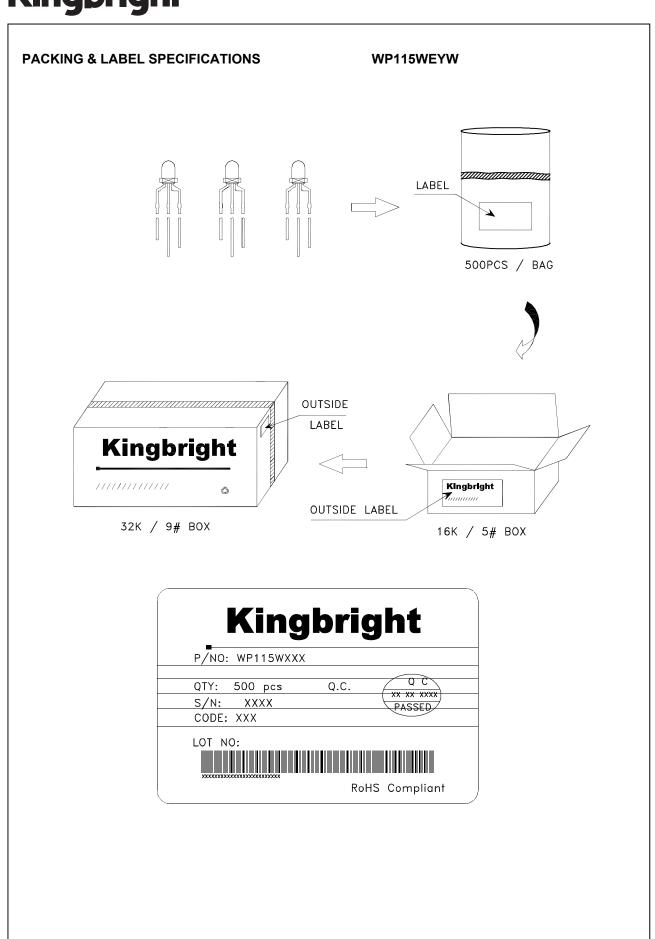


SPEC NO: DSAF2638 APPROVED: WYNEC REV NO: V.4A CHECKED: Allen Liu DATE: JAN/26/2013 DRAWN: Y.Liu PAGE: 5 OF 7 ERP: 1101030818

### **PRECAUTIONS**

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead—forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

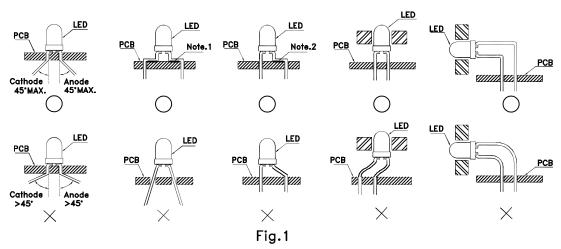


- "() " Correct mounting method "imes" Incorrect mounting method
- 2. When soldering wire to the LED, use individual heat—shrink tubing to insulate the exposed leads to prevent accidental contact short—circuit. (Fig.2)
- 3. Use stand—offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.




- 4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
- 5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

SPEC NO: DSAF2638 APPROVED: WYNEC REV NO: V.4A CHECKED: Allen Liu DATE: JAN/26/2013 DRAWN: Y.Liu PAGE: 6 OF 7 ERP: 1101030818


6. Do not bend the leads more than twice. (Fig. 8)



7. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.

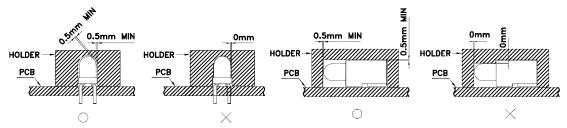

- 8. The tip of the soldering iron should never touch the lens epoxy.
- 9. Through—hole LEDs are incompatible with reflow soldering.
- 10. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.
- 11. Recommended Wave Soldering Profiles:

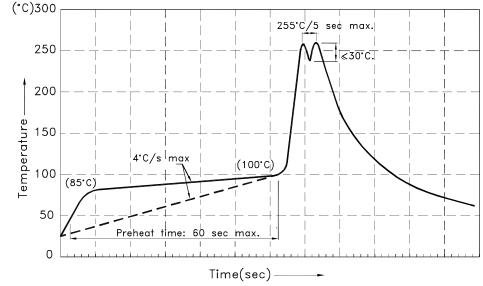

## Notes:

- 1.Recommend pre—heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
- 2.Peak wave soldering temperature between 245°C  $\sim$  255°C for 3 sec (5 sec max).
- 3.Do not apply stress to the epoxy resin while the temperature is above 85°C.
- 4.Fixtures should not incur stress on the component when mounting and during soldering process.
- 5.SAC 305 solder alloy is recommended.
- 6.No more than one wave soldering pass.

All design applications should refer to Kingbright application notes available at <a href="http://www.KingbrightUSA.com/ApplicationNotes">http://www.KingbrightUSA.com/ApplicationNotes</a>

SPEC NO: DSAF2638 REV NO: V.4A DATE: JAN/26/2013 PAGE: 7 OF 7

APPROVED: WYNEC CHECKED: Allen Liu DRAWN: Y.Liu ERP: 1101030818