



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# ConnectPort® X2

ZigBee Smart Energy Certified IP Gateway

Gateways with the ZigBee Smart Energy public profile provide interoperable IP-to-application connectivity.




## Overview

The ConnectPort X2 for Smart Energy provides a low-cost connection between a Home Area Network (HAN) and an energy service provider's software application over an IP connection. The gateway incorporates the ZigBee Smart Energy wireless standard (or "Public Application Profile"), making it interoperable with non-Digi devices. The ZigBee Smart Energy standard also allows the ConnectPort X2 to define what information the device will send over the network and how to behave with other devices on the network.

ConnectPort X2 can be combined with Device Cloud by Etherios™ service to create a platform for serving data to a software application layer. This allows energy service providers to develop their own unique, customizable Smart Energy solutions without designing customized hardware.

Built on the XBee-PRO® ZB ZigBee module, the gateways feature firmware supporting the implementation of each of the eight devices defined in the ZigBee Smart Energy Public Application Profile. The module also handles networking, joining, authentication and key establishment functions.

## Application Highlight

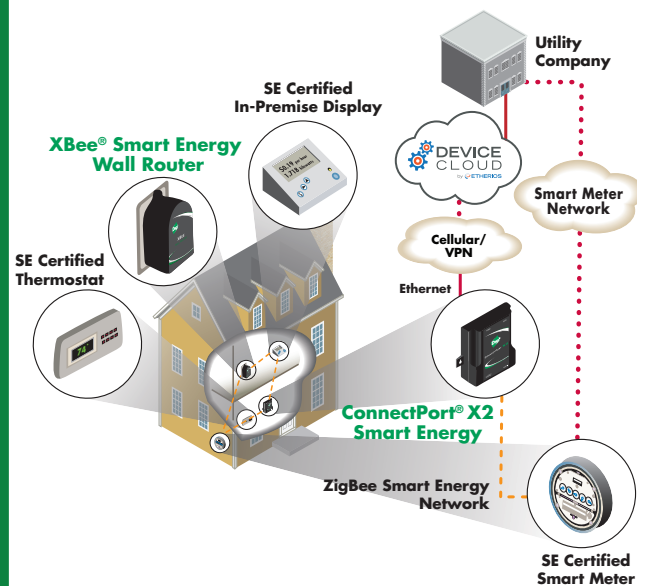

## Features/Benefits

- Full certification as a ZigBee Alliance SE 1.0 Energy Service Portal enables the Home Area Network to operate independent from any Smart Meter network if needed
- Python® open scripting support enables the device to function as a secondary gateway alongside an installed Smart Energy certified meter
- Device Cloud service manages connectivity, configuration and software upgrades, and provides a web-services interface to any current or future energy service application
- Digi's hardware design expertise speeds time-to-market and software development

## Related Products



Device Cloud Solutions



SE Gateways




SE Range Extenders



Dev Kits



Cellular Gateways



SE Ready Modules



# Specifications

# ConnectPort® X2 for Smart Energy

General	
Management	HTTP/HTTPS web interface, Password access control, IP service port control, Optional secure enterprise management via Device Cloud
Protocols	UDP/TCP, DHCP, SNMPv1
LEDs	Ethernet status, Power, ZigBee link/activity
Security	SSL tunnels
ZigBee	XBee-PRO® 80 mW (+19.1 dBm, including 2.1 dBi antenna) / Int'l 10 mW (+10 dBm)
Dimensions (L x W x H)	2.81 in x 2.74 in x 1.30 in (7.14 cm x 6.96 cm x 3.30 cm)
Weight	0.20 lb (0.09 kg)
Development	
ZigBee Public Application Profile	Smart Energy
Python Version	2.4.3
Memory (User-available memory varies by firmware and OS version)	8 MB RAM, 4 MB Flash
Ethernet	
Ports	1 RJ-45 port
Physical Layer	10/100Base-T
Data Rate	10/100 Mbps (auto-sensing)
Mode	Full or half duplex (auto-sensing)
Power Requirements	
Power Input	5 VDC
Power Supply	5 VDC power supply with barrel connector included
Power Consumption	Idle: 1.2 W, Max: 3.4 W
Surge Protection (with included power supply)	4 kV burst (EFT) per 4-4, 2 kV surge per EN61000-4
Environmental	
Operating Temperature	-30° C to +70° C (-22° F to +158° F)
Relative Humidity	5% to 95% (non-condensing)
Ethernet Isolation	1500VAC min per IEEE802.3/ANSI X3.263
Regulatory Approvals	
Safety	EN60950
Emissions/Immunity	CE, FCC Part 15 (Class B), IC, ETSI, C-TICK, Telec



Visit [www.digi.com](http://www.digi.com) for part numbers.

**DIGI SERVICE AND SUPPORT** - You can purchase with confidence knowing that Digi is here to support you with expert technical support and a strong five-year warranty. [www.digi.com/support](http://www.digi.com/support)

91001588  
A7/513

**Digi International  
Worldwide HQ**

877-912-3444  
952-912-3444

**Digi International  
France**

+33-1-55-61-98-98  
[www.digi.fr](http://www.digi.fr)

**Digi International  
Japan**

+81-3-5428-0261  
[www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**Digi International  
India**

+91-80-4287-9887

**Digi International  
Singapore**

+65-6213-5380

**Digi International  
China**

+86-21-5150-6898  
[www.digi.cn](http://www.digi.cn)

BUY ONLINE • [www.digi.com](http://www.digi.com)

**2009-2013 Digi International Inc.**

All rights reserved. Digi, Digi International, Etherios, the Digi logo, the Device Cloud by Etherios logo, ConnectPort, Device Cloud Device Cloud, XBee and XBee-PRO are trademarks or registered trademarks of Digi International Inc. in the United States and other countries worldwide. All other trademarks are the property of their respective owners. All information provided is subject to change without notice.

[info@digi.com](mailto:info@digi.com)

