



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# SUPPLY VOLTAGE MONITOR

ISSUE 4 – JULY 2006

**ZM33164**

## DEVICE DESCRIPTION

The ZM33164 is a three terminal under voltage monitor circuit for use in microprocessor systems. The threshold voltage of the device has been set to 4.3volts making it ideal for 5 volt circuits.

Included in the device is a precise voltage reference and a comparator with built in hysteresis to prevent erratic operation. The ZM33164 features an open collector output capable of sinking at least 10mA which only requires a single external resistor to interface to following circuits.

Operation of the device is guaranteed from one volt upwards, from this level to the device threshold voltage the output is held low providing a power on reset function. Should the supply voltage, once established, at any time drop below the threshold level then the output again will pull low.

The device is available in a TO92 package for through hole applications as well as SOT223 for surface mount requirements.


## FEATURES

- SOT223 and TO92 packages
- Power on reset generator
- Automatic reset generation
- Low standby current
- Guaranteed operation from 1 volt
- Wide supply voltage range
- Internal clamp diode to discharge delay capacitor
- 4.3 volt threshold for 5 volt logic
- 60mV hysteresis prevents erratic operation

## APPLICATIONS

- Microprocessor systems
- Computers
- Computer peripherals
- Instrumentation
- Automotive
- Battery powered equipment

## SCHEMATIC DIAGRAM

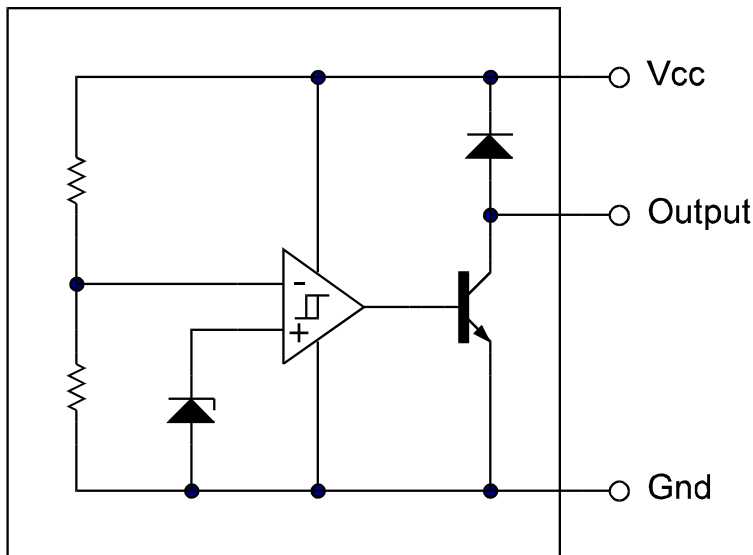

# ZM33164

## ABSOLUTE MAXIMUM RATING

Input Supply Voltage	-1 to 12V
Offstate Output Voltage	12V
Onstate Output Sink Current(Note 1)	Internally limited
Clamp diode Forward Current(Note 1)	100mA
Operating junction temperature	150°C
Operating Temperature	-40 to 85°C
Storage Temperature	-65 to 150°C

## Power Dissipation

TO92	780mW
SOT223	2W(Note 2)

## TEST CONDITIONS

(T<sub>amb</sub>=25°C for typical values, T<sub>amb</sub>=-40 to 85°C for min/max values (Note3))

## COMPARATOR

PARAMETER	SYMBOL	MIN	TYP.	MAX.	UNITS
Threshold Voltage High state output (V <sub>cc</sub> increasing)	V <sub>IH</sub>	4.15	4.33	4.45	V
Threshold Voltage Low state output (V <sub>cc</sub> decreasing)	V <sub>IL</sub>	4.15	4.27	4.45	V
Hysteresis	V <sub>H</sub>	0.02	0.06		V

## OUTPUT

Output sink saturation: (V <sub>cc</sub> =4.0V, I <sub>sink</sub> =8.0mA)	V <sub>OL</sub>		0.46	1.0	V
(V <sub>cc</sub> =4.0V, I <sub>sink</sub> =2.0mA)			0.15	0.4	V
(V <sub>cc</sub> =1.0V, I <sub>sink</sub> =0.1mA)				0.25	V
Onstate output sink current (V <sub>cc</sub> , Output=4V)	I <sub>sink</sub>	10	20	50	mA
Offstate output leakage current (V <sub>cc</sub> , Output=5V)	I <sub>oh</sub>		0.02	0.5	μA
Clamp diode forward voltage (I <sub>f</sub> =10mA)	V <sub>f</sub>	0.6	1.2	1.5	V
Propagation delay (V <sub>in</sub> 5V to 4V, R <sub>I</sub> =10k, T <sub>amb</sub> =25°C)	T <sub>d</sub>		2.0		μs


## TOTAL DEVICE

Operating input voltage range	V <sub>cc</sub>	1.0 to 10			V
Quiescent input current (V <sub>cc</sub> =5V)	I <sub>q</sub>		175	260	μA


### Note:

1. Maximum package power dissipation must be observed
2. Maximum power dissipation for the SOT223 package is calculated assuming that the device is mounted on a PCB measuring 2 inches square.
3. Low duty cycle pulse techniques are used during test to maintain junction temperatures as close to ambient as possible


## TYPICAL CHARACTERISTICS

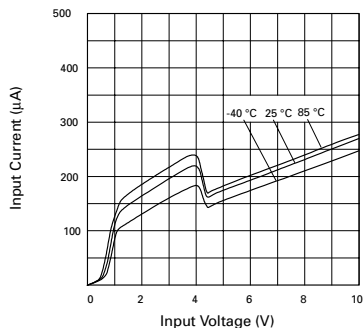


**Input Current vs. Input Voltage**

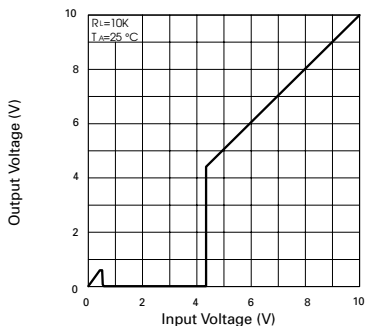


**Output Voltage vs. Input Voltage**

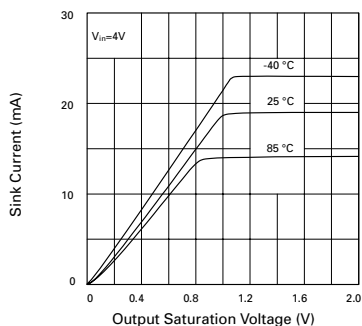


**Output Saturation Voltage vs. Sink Current**

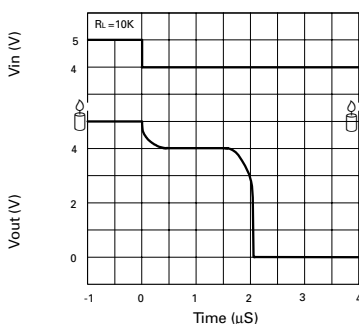

**Reset Delay Time**

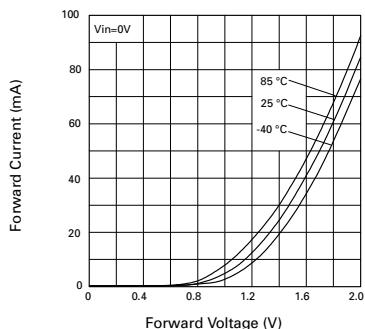


**Clamp Diode Forward Current vs. Voltage**

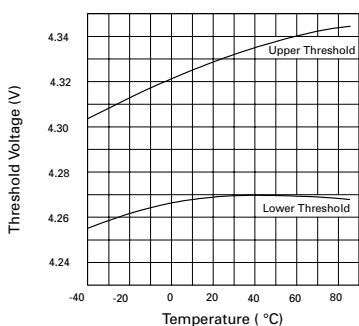


**Threshold Voltage vs. Temperature**

## TIMING DIAGRAM

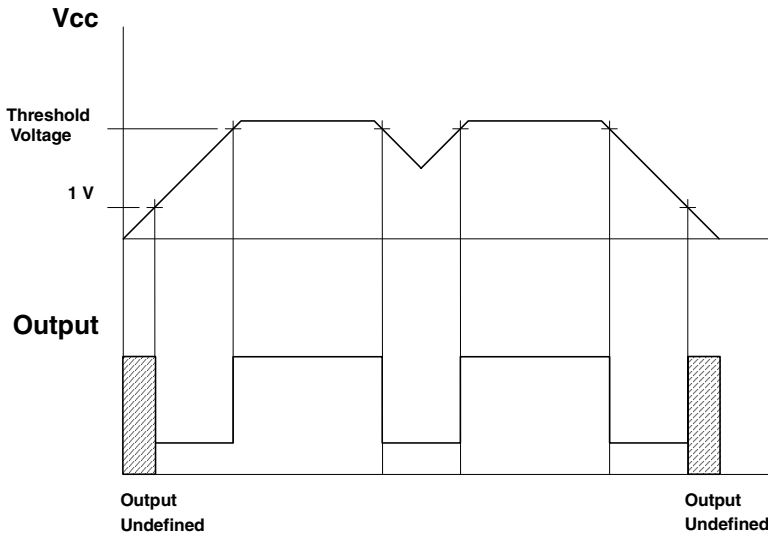

## APPLICATION CIRCUIT

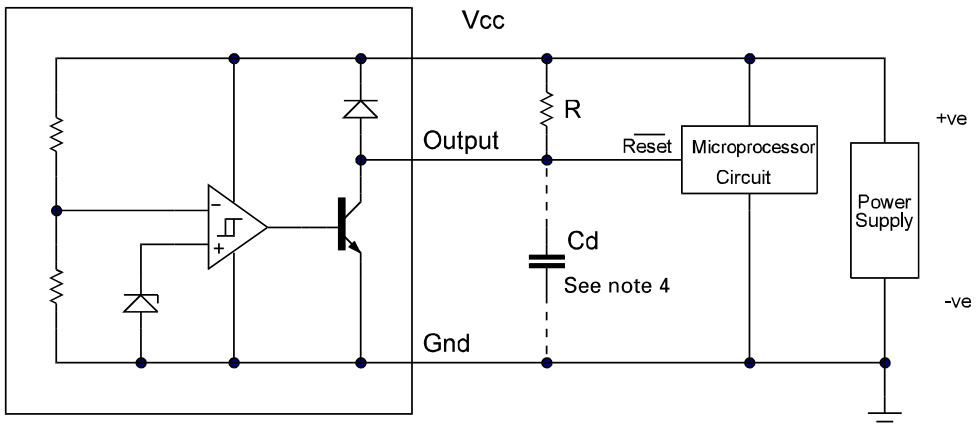

Note 4: A time delayed reset can be accomplished with the additional  $C_d$ .


$$T_{DY} = RCd \ln \left( \frac{1}{1 - \frac{V_{TH(mpu)}}{V_{in}}} \right)$$

$T_{DY}$  = Time (Seconds)  
 $V_{TH}$  = Microprocessor Reset Threshold  
 $V_{in}$  = Power Supply Voltage

# ZM33164


## CONNECTION DIAGRAMS

### TO92 Package Suffix – C



*Bottom View*

### SOT223 Package Suffix – G



*Top View –  
Pin 4 floating or connected to pin 2*

## ORDERING INFORMATION

Part Number	Package	Part Mark
ZM33164G	SOT223	ZM33164
ZM33164C	TO92	ZM33164

### Europe

Zetex GmbH  
Streitfeldstraße 19  
D-81673 München  
Germany

Telefon: (49) 89 45 49 49 0  
Fax: (49) 89 45 49 49 49  
europe.sales@zetex.com

### Americas

Zetex Inc  
700 Veterans Memorial Highway  
Hauppauge, NY 11788  
USA

Telephone: (1) 631 360 2222  
Fax: (1) 631 360 8222  
usa.sales@zetex.com

### Asia Pacific

Zetex (Asia Ltd)  
3701-04 Metroplaza Tower 1  
Hing Fong Road, Kwai Fong  
Hong Kong

Telephone: (852) 26100 611  
Fax: (852) 24250 494  
asia.sales@zetex.com

### Corporate Headquarters

Zetex Semiconductors plc  
Zetex Technology Park, Chadderton  
Oldham, OL9 9LL  
United Kingdom

Telephone: (44) 161 622 4444  
Fax: (44) 161 622 4446  
hq@zetex.com

For international sales offices visit [www.zetex.com/offices](http://www.zetex.com/offices)

Zetex products are distributed worldwide. For details, see [www.zetex.com/salesnetwork](http://www.zetex.com/salesnetwork)

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.