imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SUPPLY VOLTAGE MONITOR

ISSUE 3 – JULY 2006

DEVICE DESCRIPTION

The ZSM330 is a three terminal under voltage monitor circuit for use in microprocessor systems. The threshold voltage of the device has been set to 3.1 volts making it ideal for 3.3 volt circuits.

Included in the device is a precise voltage reference and a comparator with built in hysteresis to prevent erratic operation. The ZSM330 features an open collector output capable of sinking at least I0mA which only requires a single external resistor to interface to following circuits.

Operation of the device is guaranteed from one volt upwards, from this level to the device threshold voltage the output is held low providing a power on reset function. Should the supply voltage, once established, at any time drop below the threshold level then the output again will pull low.

The device is available in a TO92 package for through hole applications as well as SOT223 for surface mount requirements.


FEATURES

- SOT223 and TO92 packages
- Power on reset generator
- Automatic reset generation
- Low standby current
- Guaranteed operation from 1 volt
- Wide supply voltage range
- Internal clamp diode to discharge delay capacitor
- 3.1 volt threshold for 3.3 volt logic
- 20mV hysteresis prevents erratic operation

ZSM330

APPLICATIONS

- Microprocessor systems
- Computers
- Computer peripherals
- Instrumentation
- Automotive
- Battery powered equipment



SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATING

Input Supply Voltage	-1 to 10V	Power Dissipation	
Offstate Output Voltage	10V	TO92	780mW
Onstate Output		SOT223	2W(Note 2)
Sink Current(Note 1)	Internally limited		
Clamp Diode			
Forward Current(Note 1)	100mA		
Operating Junction			
Temperature	150°C		
Operating Temperature	-40 to 85°C		
Storage Temperature	-55 to 150°C		
TEST CONDITIONS			
(T _{amb} =25°C for typical	values, T _{amb} =-40 t	o 85°C for min/max va	alues (Note3))

COMPARATOR

PARAMETER	SYMBOL	MIN	TYP.	MAX.	UNITS
Threshold Voltage High state output (V _{cc} increasing)	V _{IH}	3.01	3.09	3.15	V
Threshold Voltage Low state output (V _{cc} decreasing)	V _{IL}	3.01	3.07	3.15	V
Hysteresis	V _H	0.01	0.02	0.05	V
OUPUT			l.		
Output sink saturation:	V _{OL}				
(V _{cc} =2.7V, I _{sink} =8.0mA)			0.46	1.0	V
(V _{cc} =2.7V, I _{sink} =2.0mA)			0.15	0.4	V
(V _{cc} =1.0V, I _{sink} =0.1mA)				0.25	V
Onstate output sink current (V _{cc} , Output=2.7V)	I _{sink}	10	27	60	mA
Offstate output leakage current (V _{cc} , Output=3.3V)	l _{oh}		0.02	0.5	μA
Clamp diode forward voltage (I _{f=} 10mA)	V _f	0.6	1.2	1.5	V
Propagation delay (V _{in} 3.3V to 2.7V, R _I =10k, T _{amb} =25°C)	T _d		2.2		μs

TOTAL DEVICE


Quiescent input current (V_{cc} =3.3V)Iq120180	180	μA

Note:

Maximum package power dissipation must be observed
Maximum power dissipation, for the SOT223 package is calculated assuming that the device is mounted on a PCB measuring 2 inches square.
Low duty cycle pulse techniques are used during test to maintain junction temperatures as close to ambient as possible




TYPICAL CHARACTERISTICS

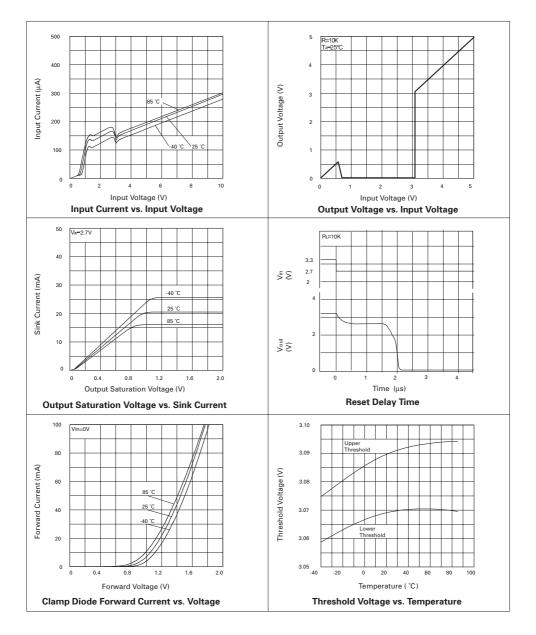



ZSM330


TIMING DIAGRAM

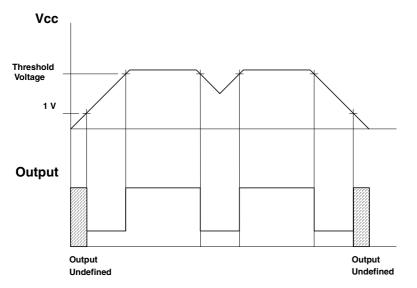

APPLICATION CIRCUIT

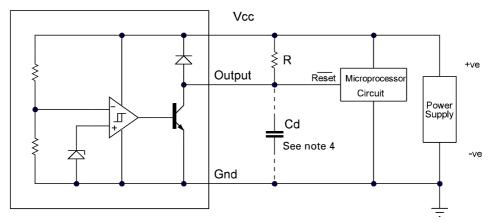








CONNECTION DIAGRAMS

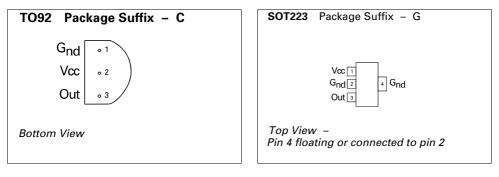

ORDERING INFORMATION

Part Number	Package	Part Mark
ZSM330G	SOT223	ZSM330
ZSM330C	TO92	ZSM330

		Zetex Semiconductors plc
D-81673 München Hauppaug Germany USA	ans Memorial Highway 3701-04 Metroplaza ge, NY 11788 Hing Fong Road, Ku Hong Kong	
Fax: (49) 89 45 49 49 49 Fax: (1) 63	e: (1) 631 360 2222 Telephone: (852) 26 31 360 8222 Fax: (852) 24250 49 @zetex.com asia.sales@zetex.co	4 Fax: (44) 161 622 4446

Zetex products are distributed worldwide. For details, see www.zetex.com/salesnetwork

This publication is issued to provide outline information only which (unless agreed by the company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contact or be regarded as a representation relating to the products or services concerned. The company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.