



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Inductive Charging Set – 5V @ 500mA max

PRODUCT ID: 1407

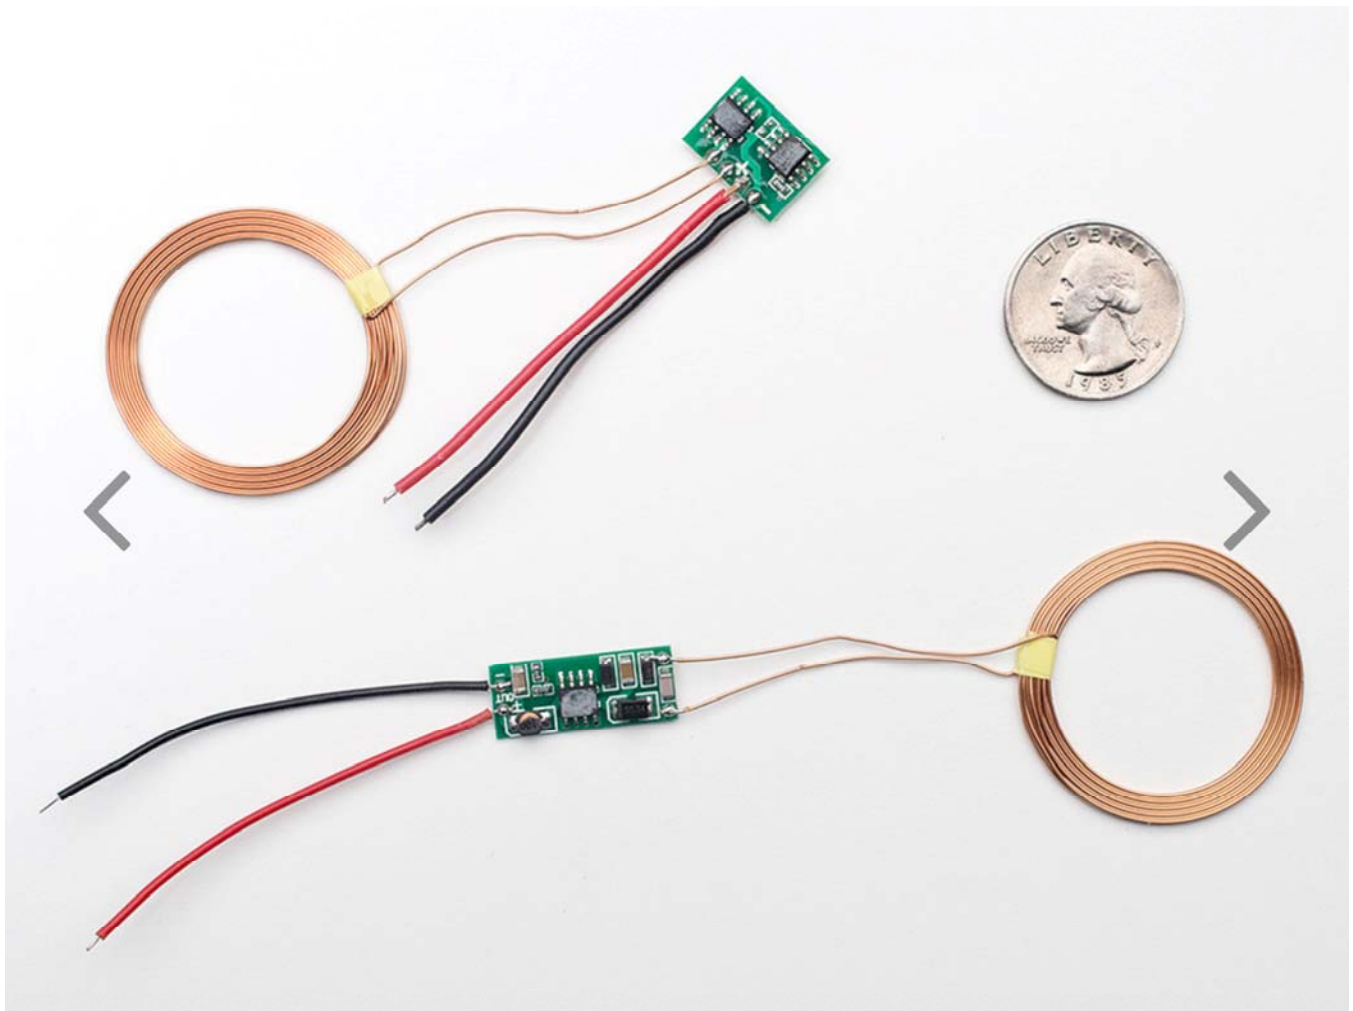

DESCRIPTION

The squarish board with two chips on it is the transmitter (power with 9V). The longer board is the output and you can connect that to the part of your project that needs powering.

Inductive charging is a way of powering a device without a direct wire connection. Most people have seen inductive charging in a rechargeable electric toothbrush: you may have noticed that you recharge it by placing it into the holder, but there's no direct plug. These chargers work by taking a power transformer and splitting it in half, an AC waveform is generated into one, and couples into the second coil.

This is a basic charger set, and it does work, providing 5V DC output from the output half when the input half is powered with 9V to 12VDC. You can draw as much as ~500mA if the coils are 2 or 3 mm apart. If you only need 100 or 200mA you can be up 7mm apart. For 10mA draw, the coils can be up to half an inch (12.5mm) apart. Any non-ferrous/non-conductive material (eg air, wood, leather, plastic, paper, glass) can be used between the two coils. The material doesn't affect the distance or efficiency. The coils do need to be fairly co-axial, try to get them to be parallel and have the circles line up for best power-transfer. (This is why the electric toothbrush must fit into the plastic holder, it's lining up the two coils for best efficiency)

Because its an air-core transformer, it's fairly inefficient. Only about 40% of the energy in shows up on the other end, but for low power or charging project. If you draw 5V 100mA on the output side (0.5W), you'll need $0.5W * 2.5 / 9V = \sim 150mA$ from the input end. The quiescent current is about 70mA at all time, even when the other coil is not anywhere near by.

These are basic modules, probably used for some low cost toy. We don't have any datasheets or specifications for them. We do see a feedback resistor divider on the output side using 0603 SMT resistors so an advanced user could solder in different values to turn it into a 3.3V output.

Technical Details

[Diagram](#)

Coil thickness: 1.75mm / 0.07"

PCB thickness (at tallest point): 3mm / 0.12"

Receiver weight: 5.5g

Transmitter weight 5.7g