![Chipsmall logo]

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

PHŒNIX CONTACT

Patch cable - VS-PNRJ45-PNRJ45-93B-5,0 - 1406403

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)

PROFINET patch cable, shielded, star quad, 22 AWG stranded (7-wire), green, straight RJ45 plug/IP20 to straight RJ45 plug/IP20, length: 5.0 m

PROFINET patch cable

Key Commercial Data

Packing unit	1 STK
Custom tariff number	85444210
Country of origin	Poland

Technical data

Dimensions

Length of cable	5 m

General data

Number of positions	4
Signal type/category	PROFINET

Characteristics head 1

Head type	Plug straight RJ45 / IP20

Characteristics head 2

Head type	Plug straight RJ45 / IP20

Cable

| Signal type/category	PROFINET CAT5 (IEC 11801:2002)
Cable structure	1x4xAWG22/7; SF/TQ
Conductor cross section	0.34 mm²

Patch cable - VS-PNRJ45-PNRJ45-93B-5,0 - 1406403

Technical data

Cable

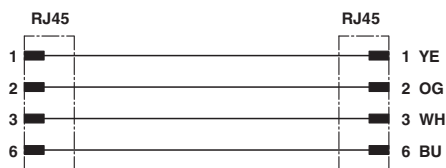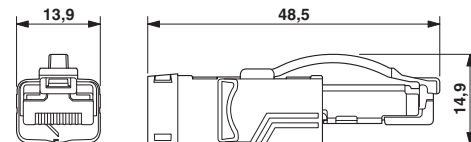|	
AWG signal line	22
Conductor structure signal line	7x 0.25 mm
Core diameter including insulation	approx. 1.5 mm
Wire colors	White, yellow, blue, orange
External sheath, color	green RAL 6018
Outer sheath, material	PVC
Conductor material	Tin-plated Cu litz wires
Wave impedance	100 Ω ±15 Ω (at 1 ... 100 MHz)

Drawings

Schematic diagram

8 7 6 5 4 3 2 1

Cable cross section

Circuit diagram

RJ45		RJ45	
1		1	YE
2		2	OG
3		3	WH
6		6	BU

Dimensional drawing

13,9   48,5   14,9

RJ45 connector, IP20

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27060307
eCl@ss 6.0	27061801

Patch cable - VS-PNRJ45-PNRJ45-93B-5,0 - 1406403

Classifications

eCl@ss

eCl@ss 7.0	27061801
eCl@ss 8.0	27060308
eCl@ss 9.0	27060308

ETIM

ETIM 3.0	EC000830
ETIM 4.0	EC000438
ETIM 5.0	EC002599

UNSPSC

UNSPSC 6.01	26121616
UNSPSC 7.0901	26121616
UNSPSC 11	26121604
UNSPSC 12.01	31261501
UNSPSC 13.2	26121616

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approvals submitted

Approval details

EAC